
GMTECNOLED

Real progress happens
only when advantages of a
new technology become
available to everybody.

Henry Ford

GMTECNOLED



PRODUCT INDEX

	INDUSTRIAL
10	MERAK 100-4K
12	MERAK 150-4K
14	MERAK 200-4K
16	MERAK 100-5K
18	MERAK 150-5K
20	MERAK 200-5K
22	VEGA FOCALIZED 100-4K
24	VEGA FOCALIZED 150-4K
26	VEGA FOCALIZED 200-4K
28	VEGA FOCALIZED 150-5K
30	VEGA FOCALIZED 200-5K
32	VEGA 100-4K
34	VEGA AD150-4K
36	VEGA AD200-4K
38	VEGA 100-5K
40	VEGA AD150-5K
42	VEGA AD200-5K
44	VEGA SENS 100-4K
46	VEGA SENS 150-4K
48	VEGA SENS 200-4K
50	VEGA SENS 100-5K
52	VEGA SENS 150-5K
54	VEGA SENS 200-5K
56	VEGA SENS PRO 100-4K
58	VEGA SENS PRO 150-4K
60	VEGA SENS PRO 200-4K
62	VEGA SENS PRO 100-5K
64	VEGA SENS PRO 150-5K
66	VEGA SENS PRO 200-5K
68	ALTAIR 030-3K
70	ALTAIR 050-3K
72	ALTAIR 030-4K
74	ALTAIR 050-4K
76	ALTAIR 030-5K
78	ALTAIR 050-5K
80	ALBIREO PRO 240-4K
82	ALBIREO PRO 400-4K
84	ALBIREO PRO 150-5K
86	ALBIREO PRO 240-5K
88	ALBIREO PRO 400-5K
90	ALBIREO 100-4K
92	ALBIREO 150-4K
94	ALBIREO 200-4K
96	ALBIREO 240-4K
98	ALBIREO 400-4K
100	ALBIREO 100-5K
102	ALBIREO 150-5K
104	ALBIREO 200-5K
106	ALBIREO 240-5K
108	ALBIREO 400-5K
110	MINTAKA 050-3K
112	MINTAKA 100-3K
114	MINTAKA 050-4K
116	MINTAKA 080-4K
118	MINTAKA 100-4K
120	POLLUCE 40-3K
122	POLLUCE 80-3K
124	POLLUCE 40-4K
126	POLLUCE 80-4K
128	GOMEISA 20-4K
130	GOMEISA 40-4K
132	GOMEISA 60-4K
134	GOMEISA 20-5K
136	GOMEISA 30-5K
138	GOMEISA 40-5K
140	GOMEISA 60-5K
142	GOMEISA AD40-CCTAD
144	GOMEISA AD60-CCTAD
146	GOMEISA AD40-4K
148	GOMEISA AD60-4K
150	GOMEISA AD40-5K
152	GOMEISA AD60-5K
154	GOMEISA PRO AD40-CCTAD
156	GOMEISA PRO AD60-CCTAD
158	GOMEISA DIM40-4K
160	GOMEISA DIM60-4K
162	GOMEISA SENS 40-4K
164	GOMEISA SENS 60-4K
166	RIGEL 40-4K
168	RIGEL 60-4K

170 ALIOTH 36-4K
172 ALIOTH 55-4K
174 ALPHARD SENS 150-3K
176 ALPHARD SENS 150-4K
178 ALPHARD SENS 150-5K
180 ALPHARD SENS 200-3K
182 ALPHARD SENS 200-4K
184 ALPHARD SENS 200-5K
186 ALPHARD SENS 240-3K
188 ALPHARD SENS 240-4K
190 ALPHARD SENS 240-5K
192 ALPHARD AD150-3K
194 ALPHARD AD150-4K
196 ALPHARD AD150-5K
198 ALPHARD AD240-3K
200 ALPHARD AD240-4K
202 ALPHARD AD240-5K
204 REGULUS AD75
206 REGULUS AD120

ATEX

210 ARCTURUS EX 100
212 ARCTURUS EX 200
214 GIENAH EX 40
216 GIENAH EX 60
218 ALKAID EX 100
220 ALKAID EX 200

SPORT

224 CASSIOPEA DIM-AD750-30D
226 CASSIOPEA DIM-AD750-MLP30
228 CASSIOPEA VERTICAL DIM-AD1K2-30D
230 CASSIOPEA VERTICAL DIM-AD1K5-30D
232 CASSIOPEA VERTICAL DIM-AD1K2-20D
234 CASSIOPEA VERTICAL DIM-AD1K5-20D
236 CASSIOPEA VERTICAL DIM500-30D
238 CASSIOPEA VERTICAL DIM500-P50
240 CASSIOPEA VERTICAL DIM1K0-20D
242 CASSIOPEA VERTICAL DIM1K0-30D
244 CASSIOPEA VERTICAL DIM1K0-P50
246 CASSIOPEA VERTICAL DIM1K5-20D
248 CASSIOPEA VERTICAL DIM1K5-30D
250 CASSIOPEA VERTICAL DIM1K5-P50
252 ALBIREO PADEL 150
254 ALBIREO PADEL AD150
256 ALBIREO PADEL AD240
258 ALBIREO TENNIS AD150
260 ALBIREO TENNIS AD240
262 ALBIREO TENNIS AD400
264 ALCIONE PRO 120
266 ALCIONE PRO 200
268 ALCIONE 120D
270 ALCIONE 200D
272 ALCIONE 120
274 ALCIONE 200
276 ENIF PADEL AD60
278 DABIH TENNIS AD75

OUTDOOR

282 SIRIO LENS AD60-CCTAD
284 SIRIO PLATE AD60-CCTAD
286 SIRIO HERITAGE 40
288 WALLWASHER 72-RGBNW
290 WALLWASHER 72-RGBWW
292 WALLWASHER 72-NW
294 WALLWASHER 72-WW

OFFICE

298 MEROPE BLACK 40
300 MEROPE WHITE 40
302 ANTARES SQR-34
304 ANTARES RCT-34
306 ANTARES SQR-AD42
308 ANTARES RCT-AD42


GMTECNOLED

INDUSTRIAL

GMTECNOLED




Drawing Merak 100-4k

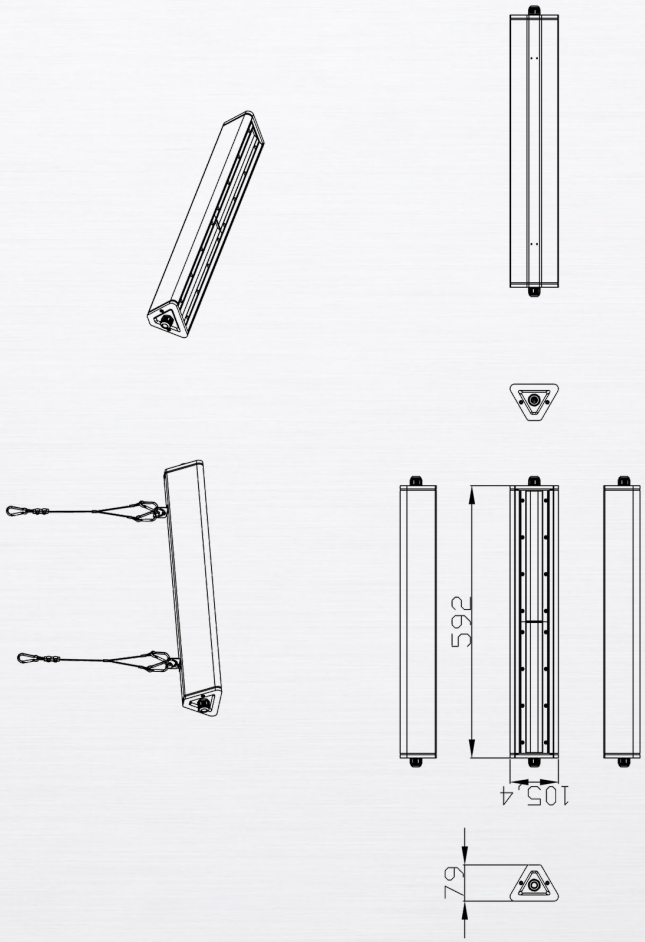



GMTECNOLED

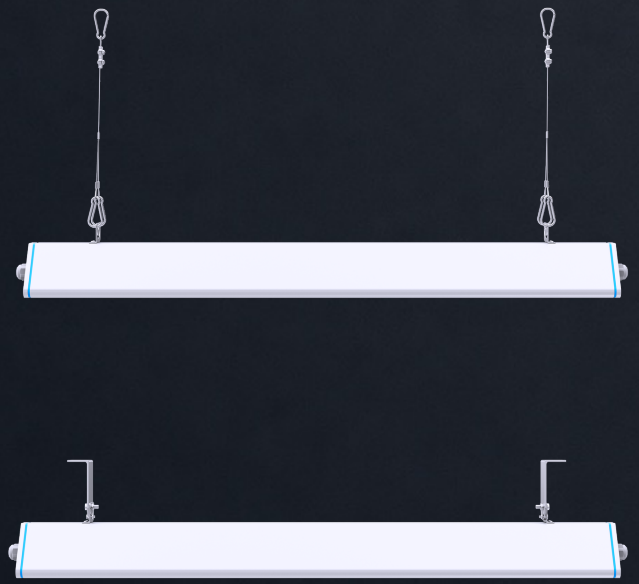


MERAK 100-4K

GM-MERA-100W-4KD30


Power: 100W
CCT: 4000K
Lumen: 16000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

Drawing Merak 150-4k

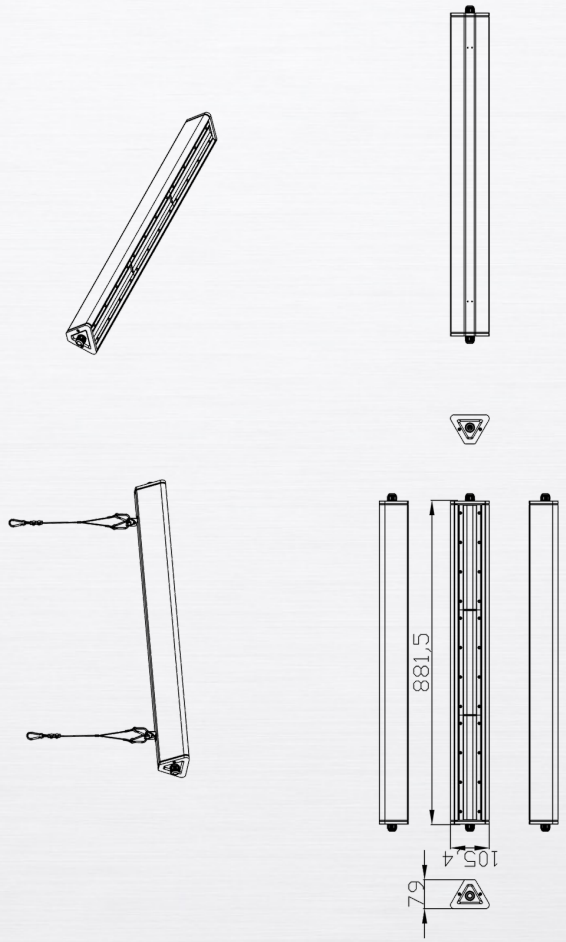



GMTECNOLED

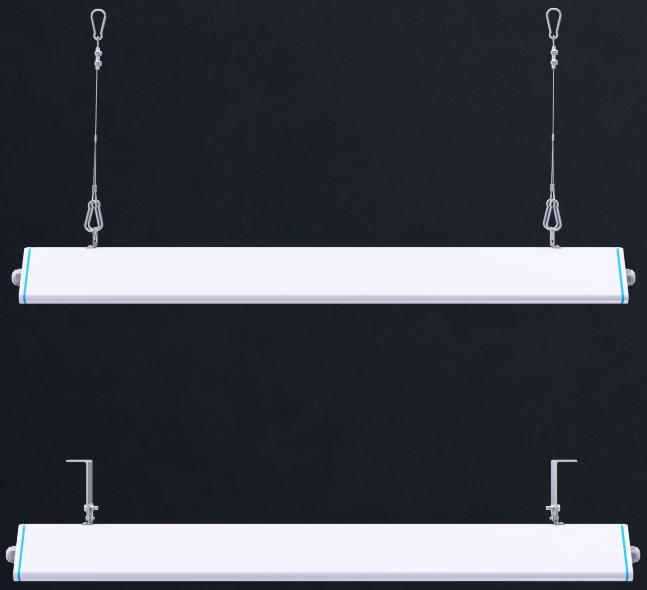



MERAK 150-4K

GM-MERA-150W-4KD30

Power: 150W
CCT: 4000K
Lumen: 24000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

Drawing Merak 200-4k

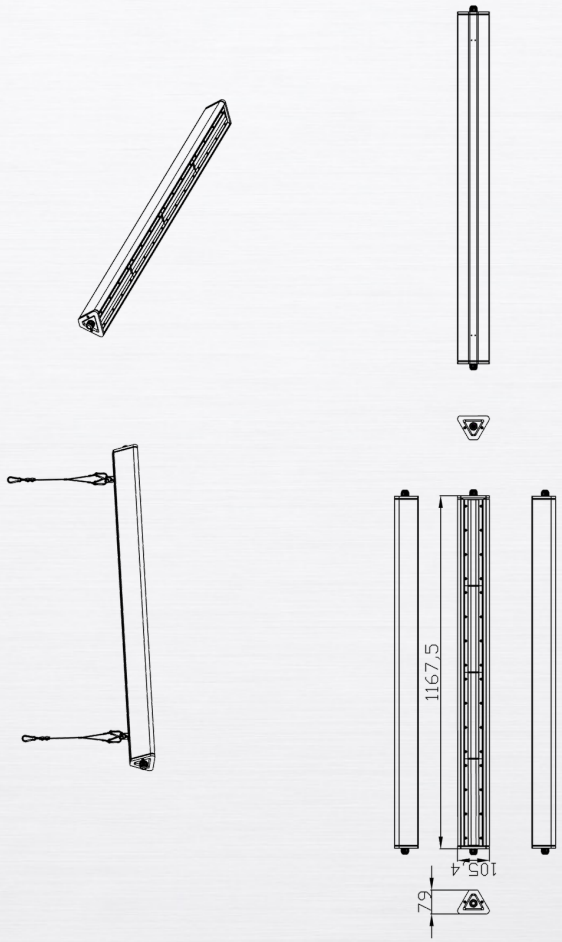

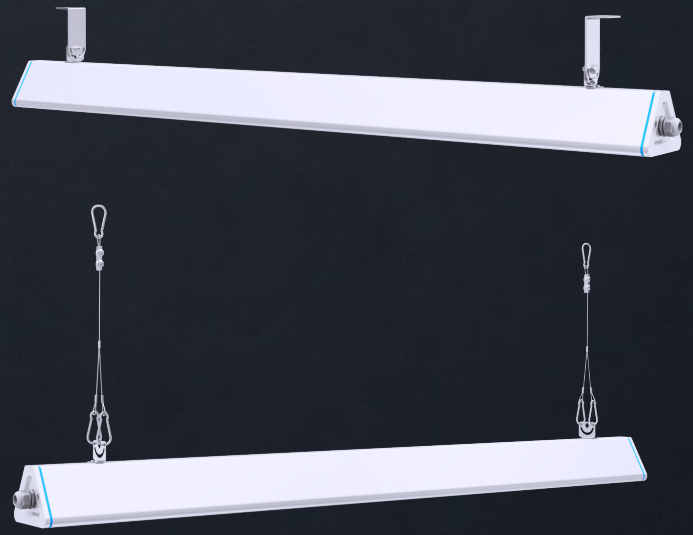


GMTECNOLED

GMTECNOLED


MERAK 200-4K

GM-MERA-200W-4KD30

Power: 200W
CCT: 4000K
Lumen: 32000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

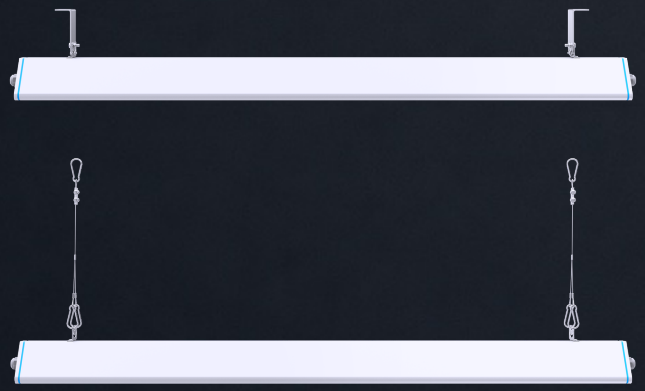


Drawing Merak 100-5k

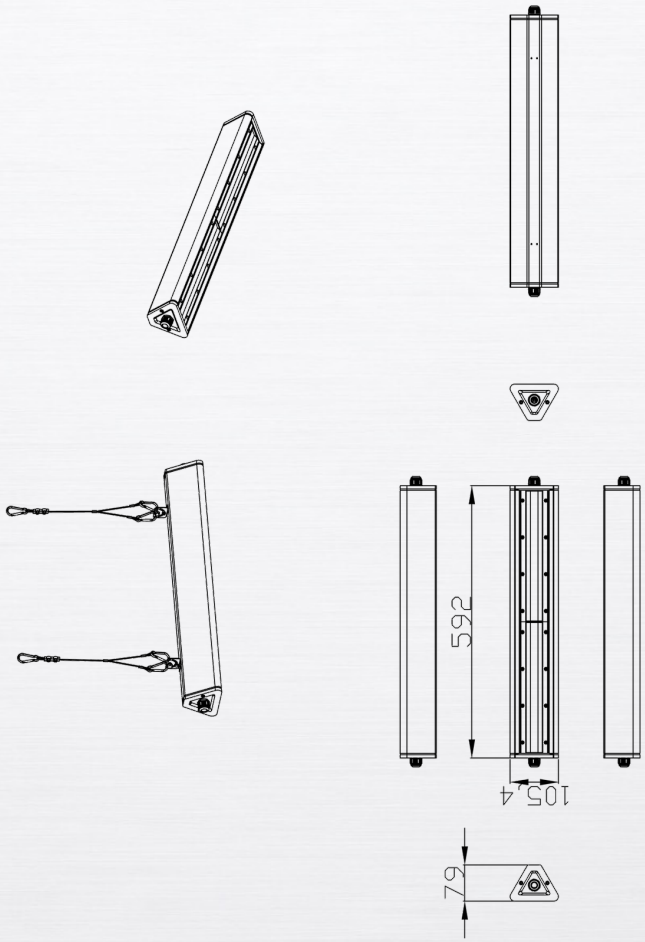



GMTECNOLED

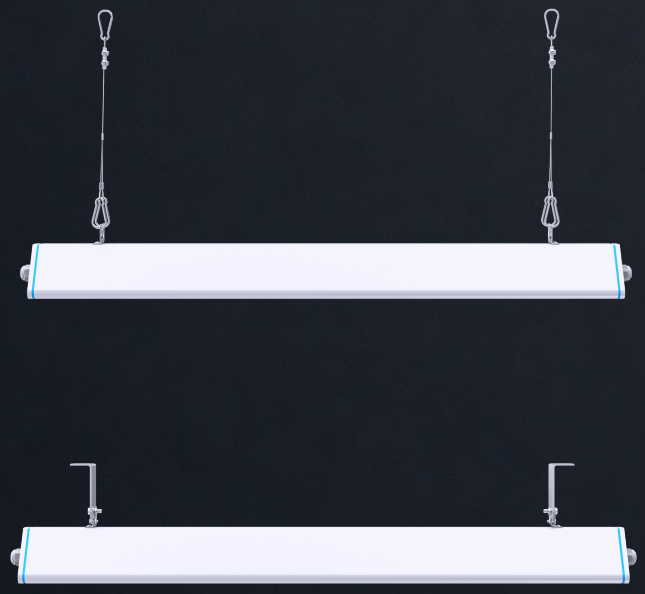


MERAK 100-5K

GM-MERA-100W-5KD30


Power: 100W
CCT: 5000K
Lumen: 16000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

Drawing Merak 150-5k

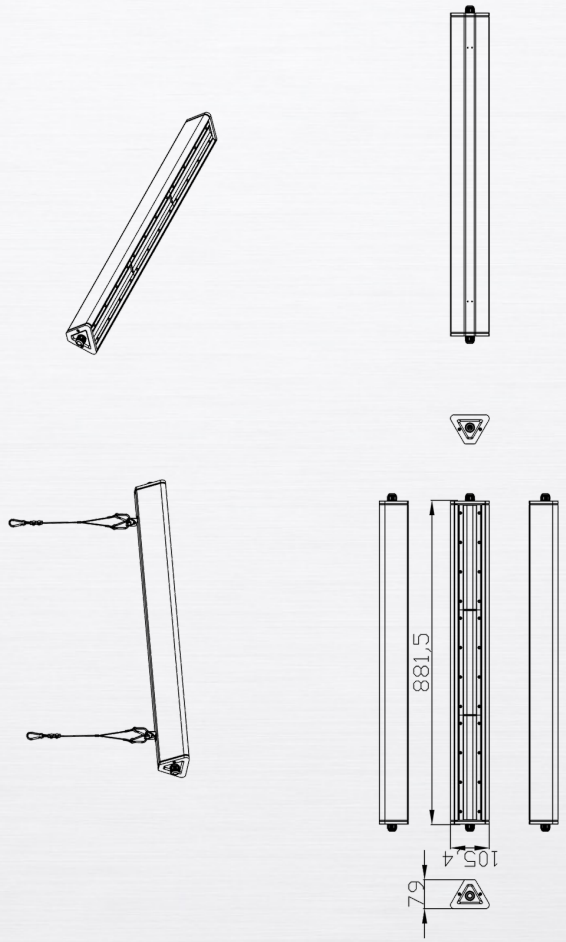



GMTECNOLED

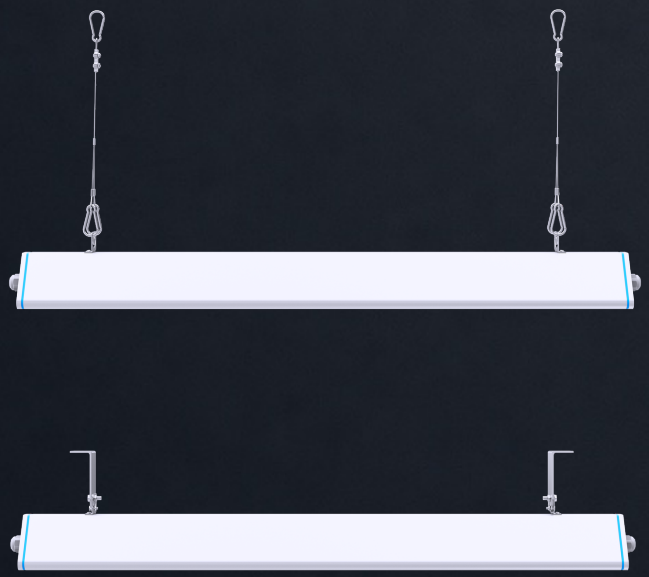



MERAK 150-5K

GM-MERA-150W-5KD30


Power: 150W
CCT: 5000K
Lumen: 24000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

Drawing Merak 200-5k

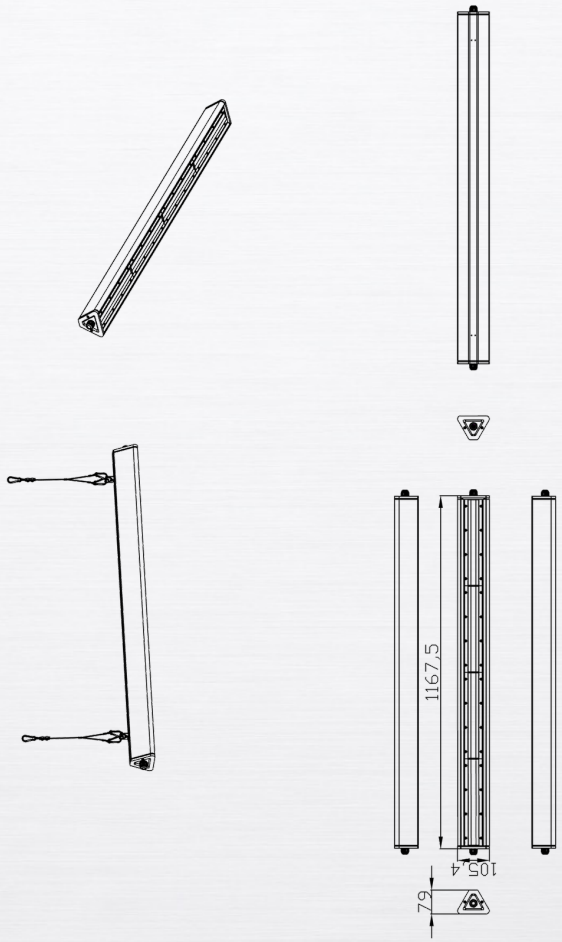

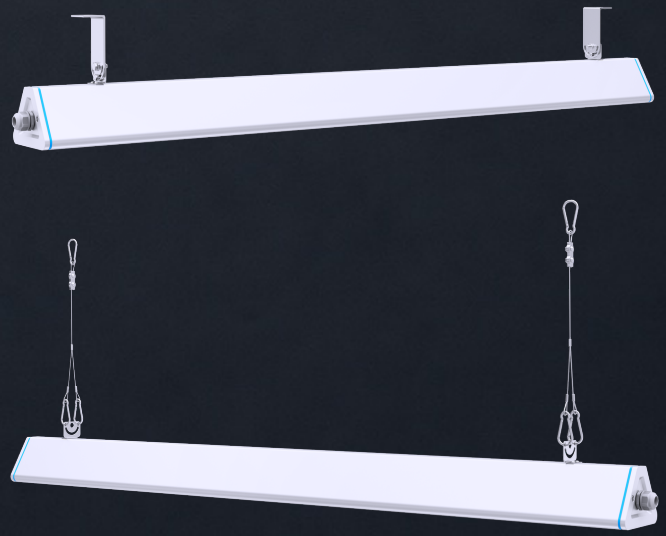

GMTECNOLED

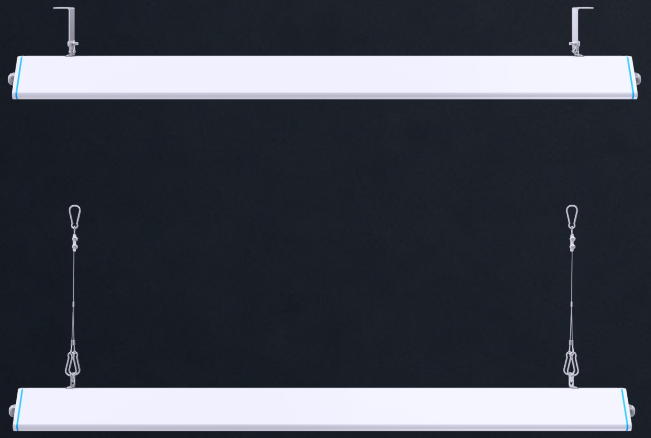


MERAK 200-5K

GM-MERA-200W-5KD30


Power: 200W
CCT: 5000K
Lumen: 32000
Optical option: 30*90 (optional: 60*110°/90*110°/asymetric 25°/P18)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode


Drawing Vega focalized 100-4k

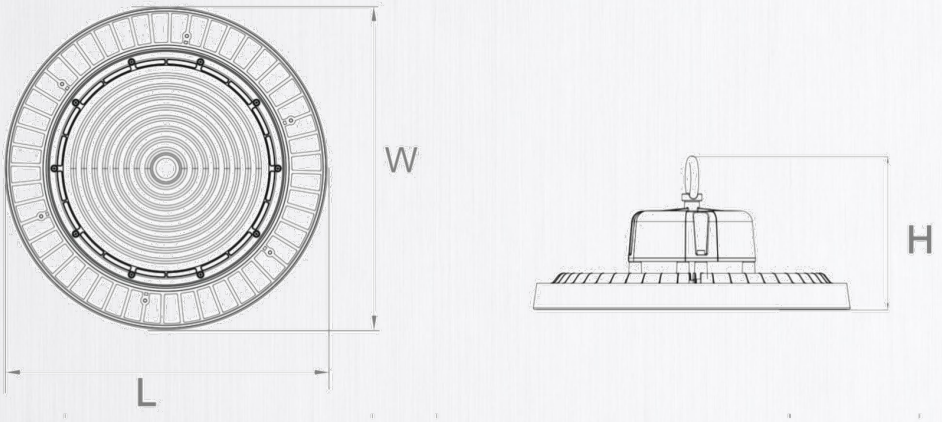

	L	H	W
100W	238mm	105mm	238mm
150W	255mm	162mm	255mm
200W	300mm	176mm	300mm



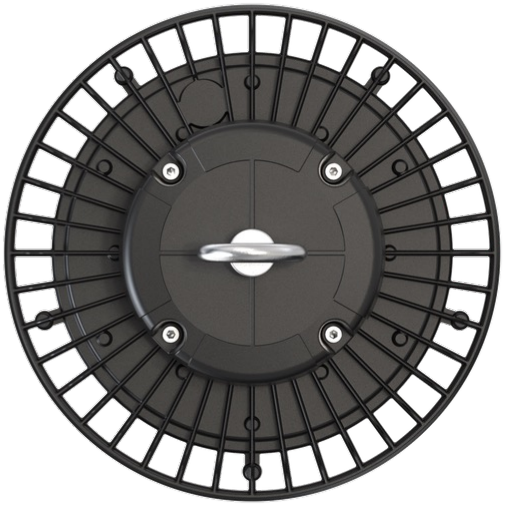

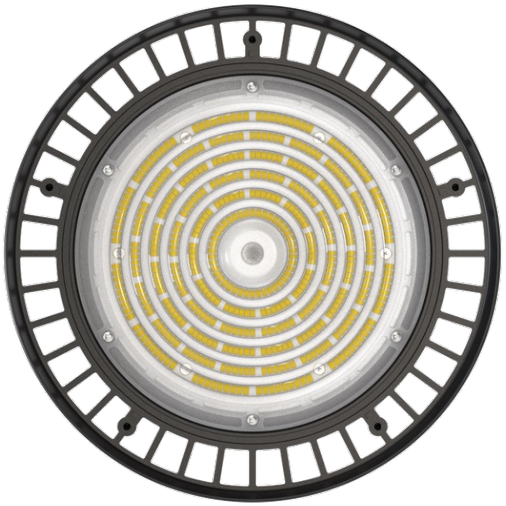


VEGA FOCALIZED 100-4K

GM-VEGA-FOC-100W-4KD90

Power: 100W
CCT: 4000K
Lumen: 15000
Optical option: 90° (optional: 30°/60°/120°)
Dimmerable: 1-10V (optional: PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode


Drawing Vega focalized 150-4k

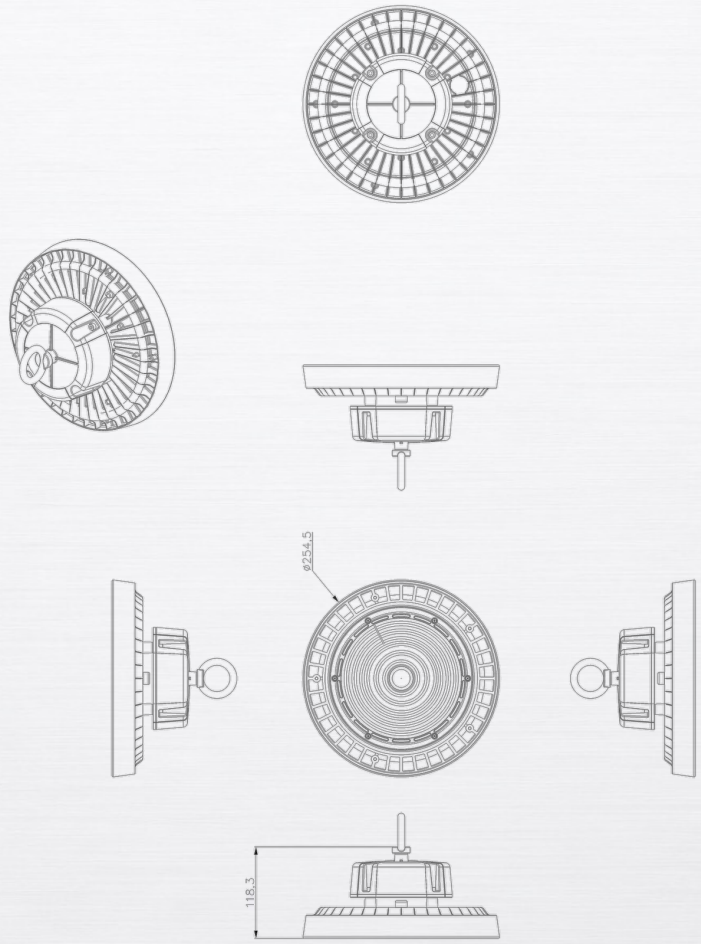






GMTECNOLED

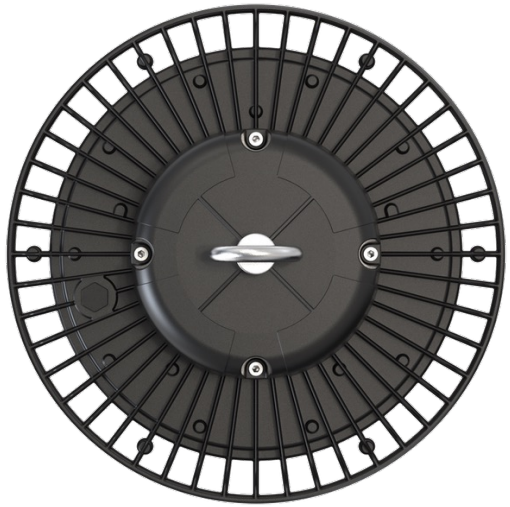

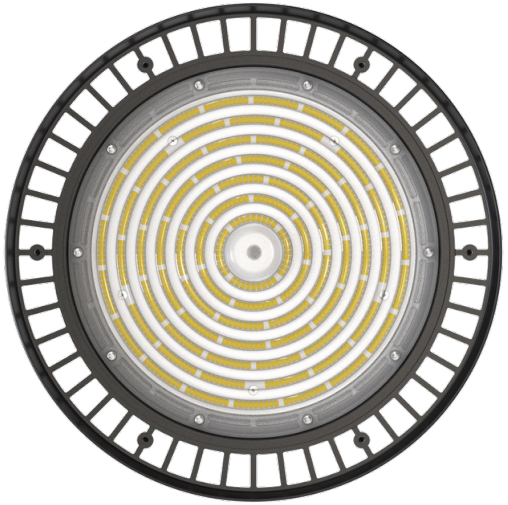


VEGA FOCALIZED 150-4K

GM-VEGA-FOC-150W-4KD90

Power: 150W
CCT: 4000K
Lumen: 22500
Optical option: 90° (optional: 30°/60°/120°)
Dimmerable: 1-10V (optional: PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode


Drawing Vega focalized 200-4k

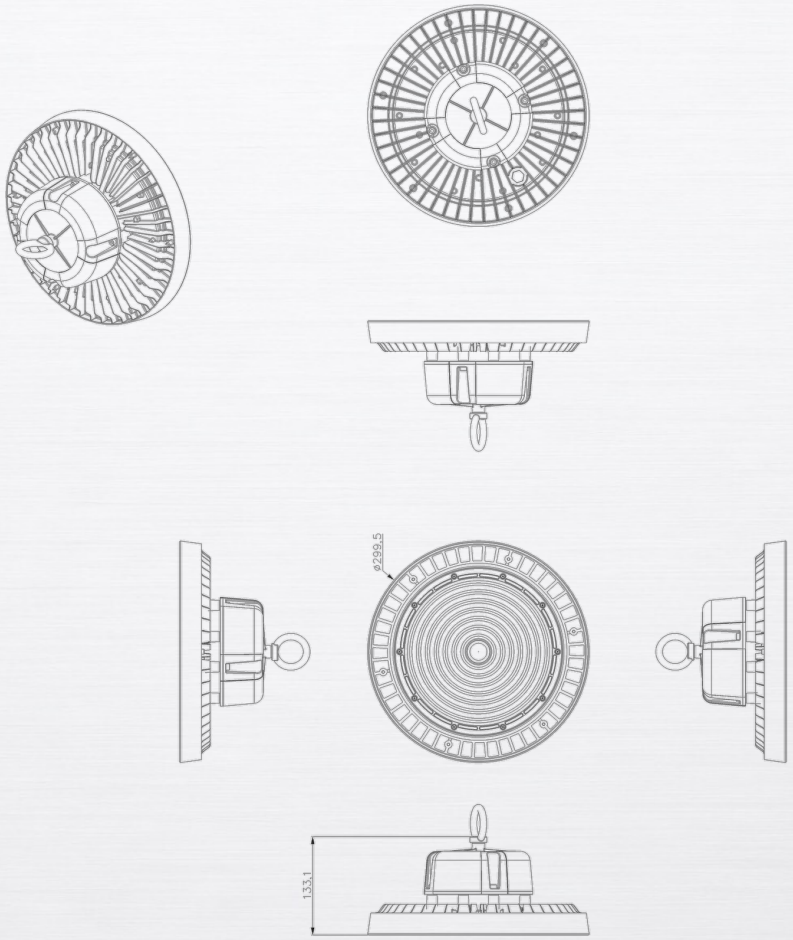






GMTECNOLED

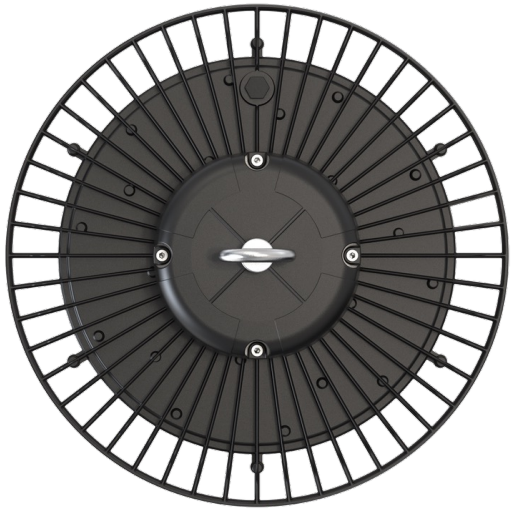

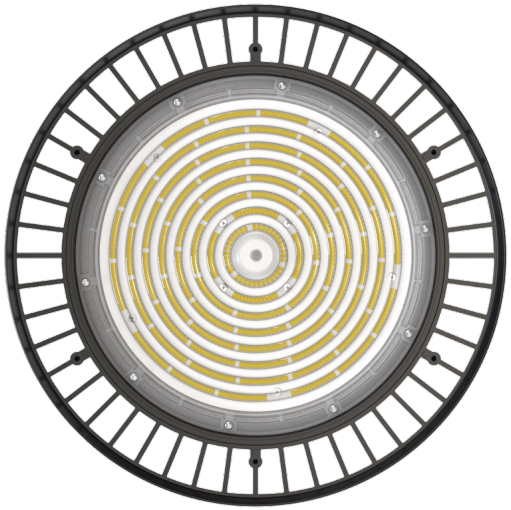


VEGA FOCALIZED 200-4K

GM-VEGA-FOC-200W-4KD90

Power: 200W
CCT: 4000K
Lumen: 30000
Optical option: 90° (optional: 30°/60°/120°)
Dimmerable: 1-10V (optional: PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode


Drawing Vega focalized 150-5k

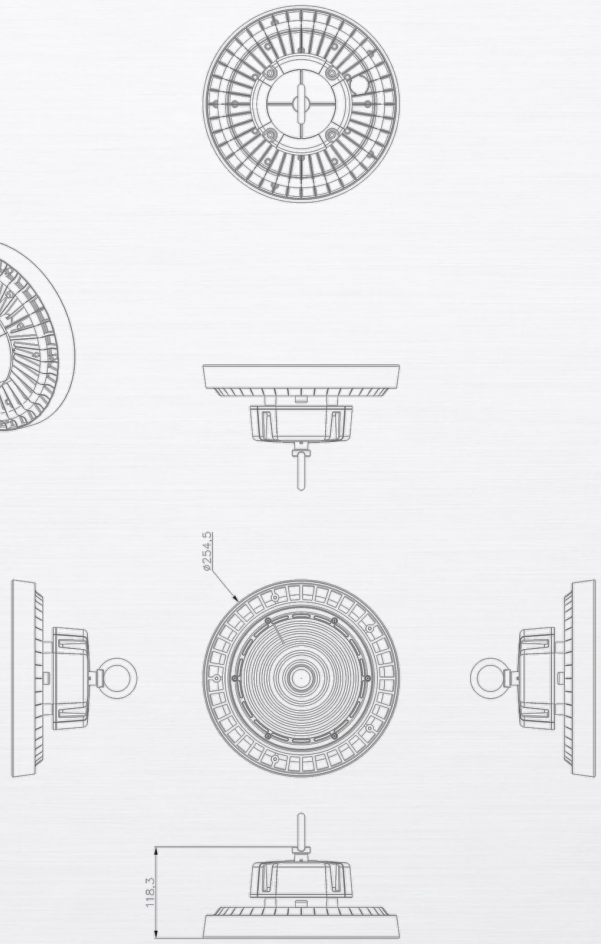






GMTECNOLED

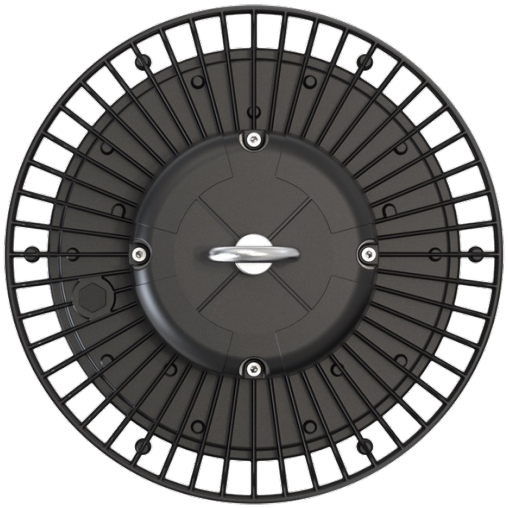

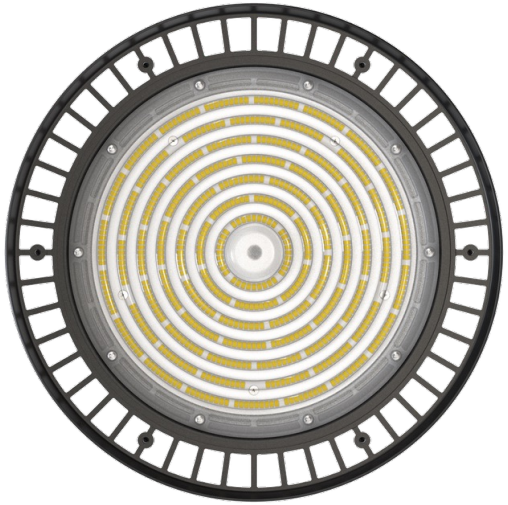


VEGA FOCALIZED 150-5K

GM-VEGA-FOC-150W-5KD90

Power: 150W
CCT: 5000K
Lumen: 22500
Optical option: 90° (optional: 30°/60°/120°)
Dimmerable: 1-10V (optional: PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode


Drawing Vega focalized 200-5k

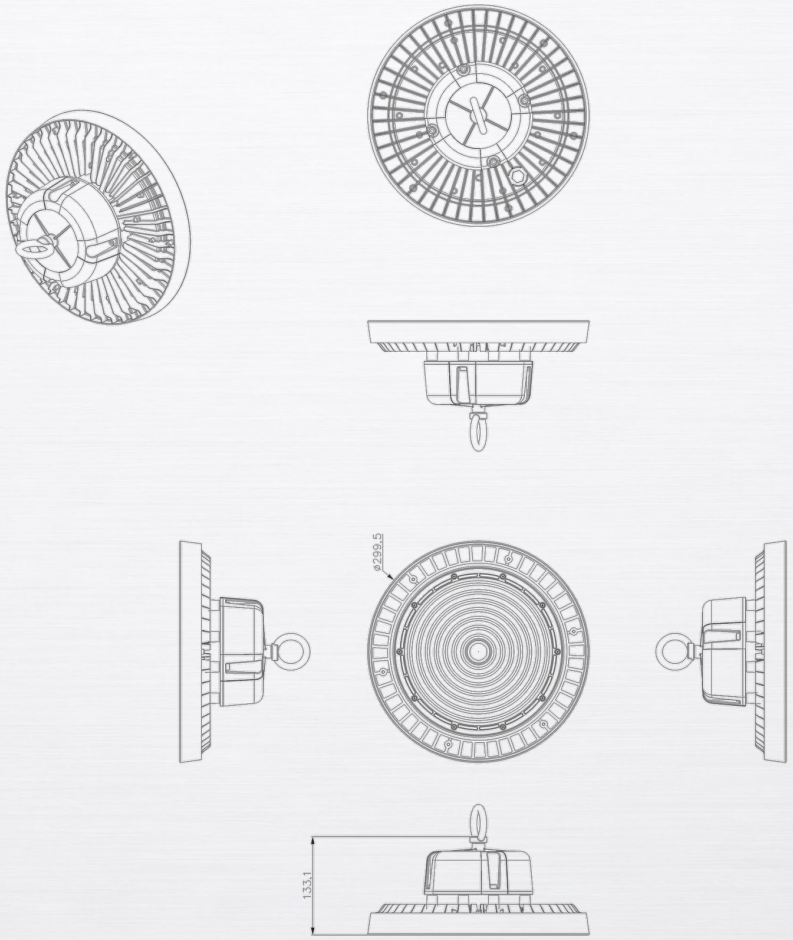






GMTECNOLED

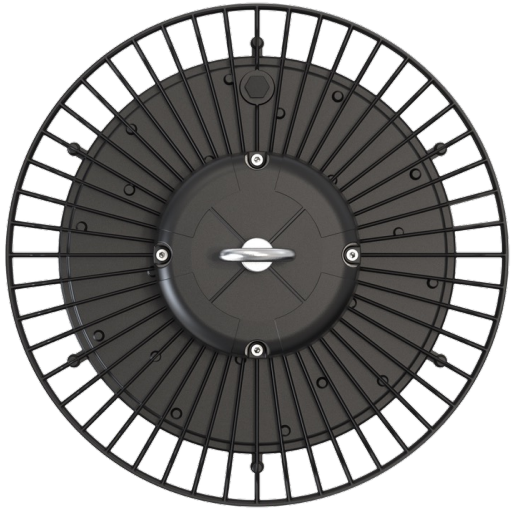

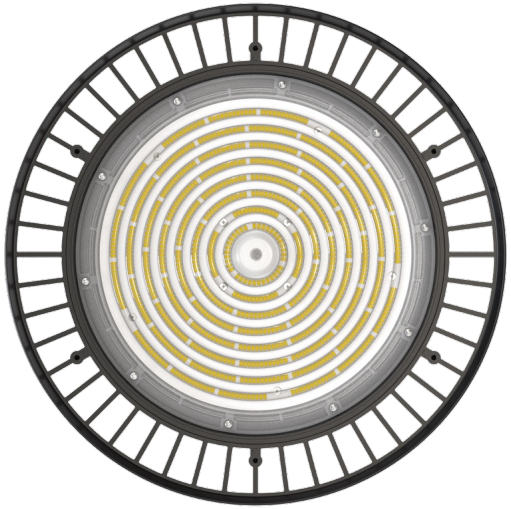


VEGA FOCALIZED 200-5K

GM-VEGA-FOC-200W-5KD90

Power: 200W
CCT: 5000K
Lumen: 30000
Optical option: 90° (optional: 30°/60°/120°)
Dimmerable: 1-10V (optional: PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode

Drawing Vega 100-4k

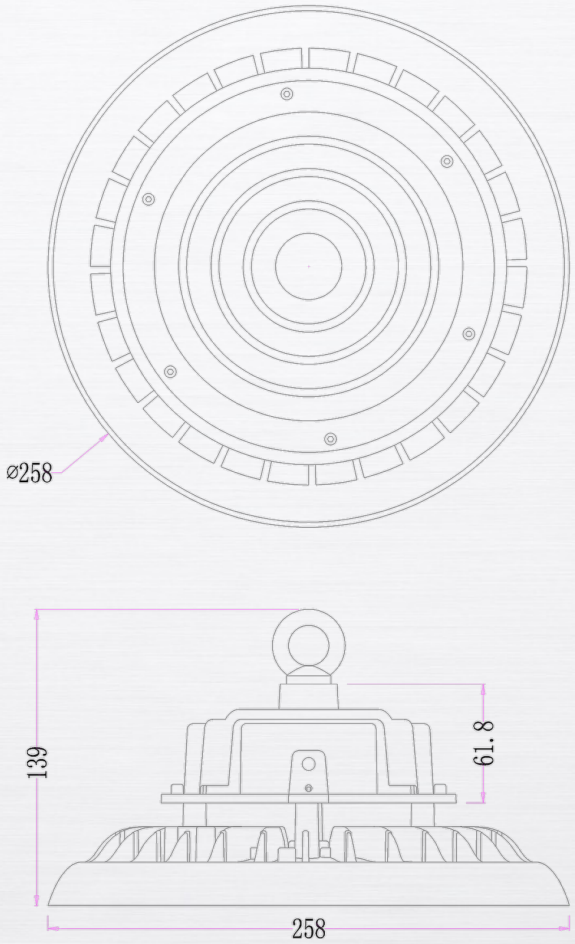



GMTECNOLED






VEGA 100-4K

GM-VEGA-100W-4KD120

Power: 100W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 15000
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega ad150-4k

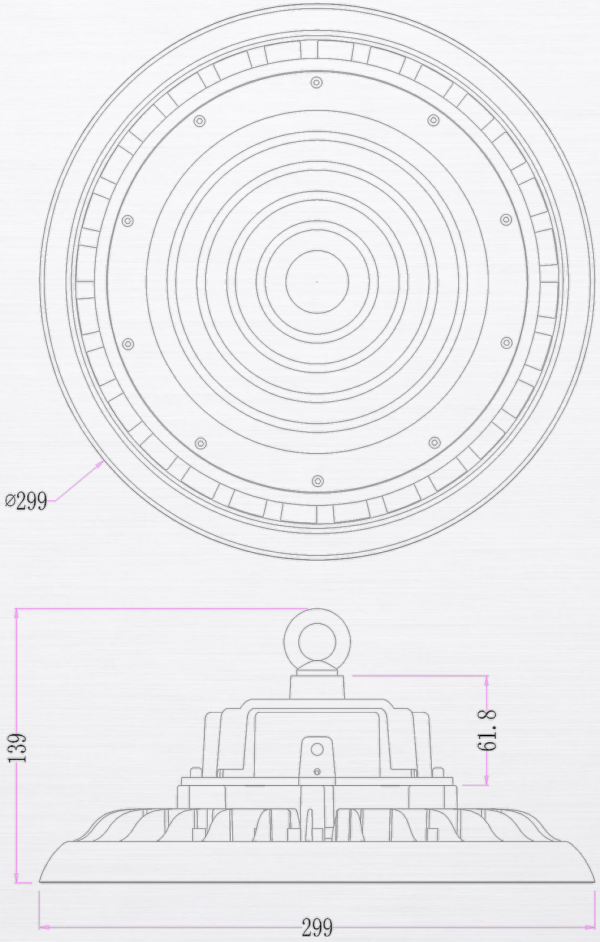



GMTECNOLED







VEGA AD150-4K

GM-VEGA-150W-4KD120-AD

Power: 150W/120W/100W
CCT: 4000K
Lumen: 22500
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega ad200-4k

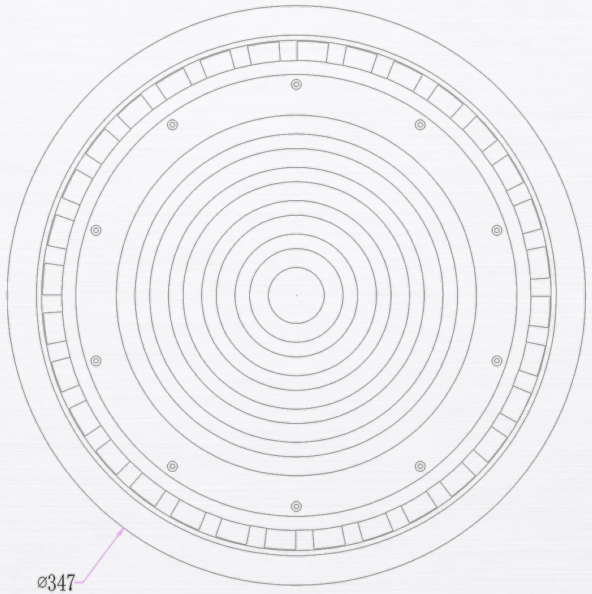

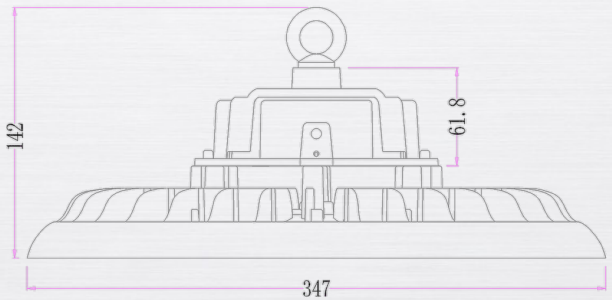





GMTECNOLED






VEGA AD200-4K

GM-VEGA-200W-4KD120-AD

Power: 200W/150W/120W
CCT: 4000K
Lumen: 30000
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega 100-5k

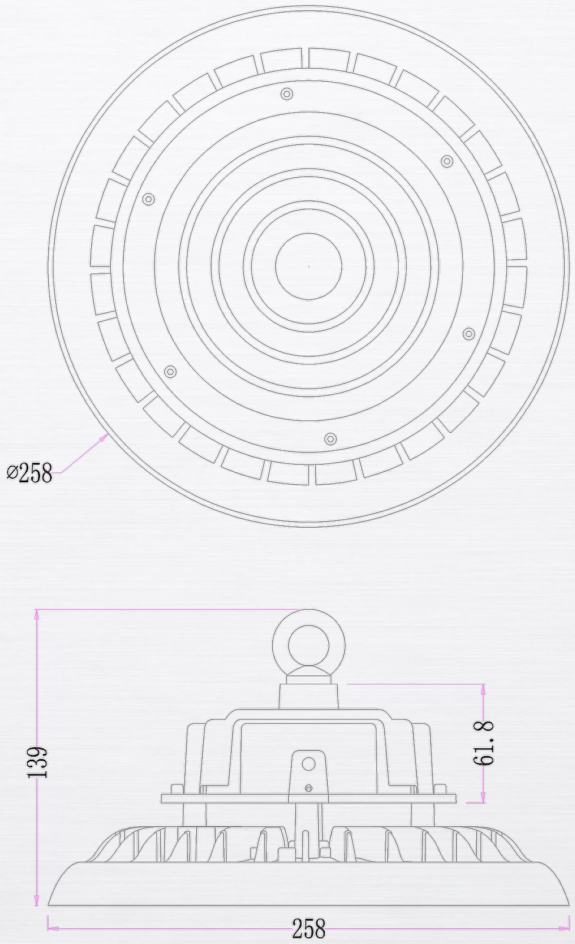



GMTECNOLED






VEGA 100-5K

GM-VEGA-100W-5KD120

Power: 100W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 15000
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega ad150-5k

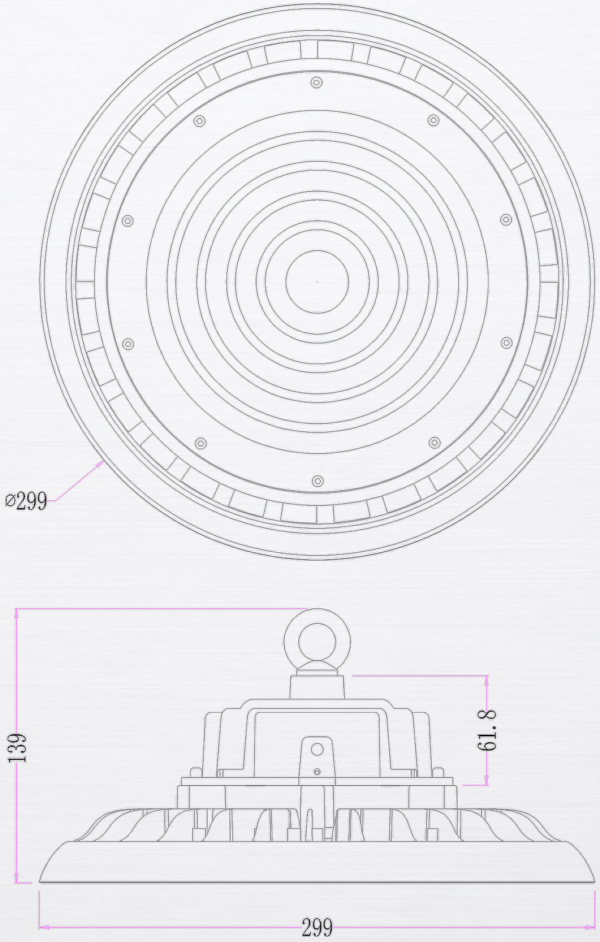





GMTECNOLED






VEGA AD150-5K

GM-VEGA-150W-5KD120-AD

Power: 150W/120W/100W
CCT: 5000K
Lumen: 22500
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega ad200-5k

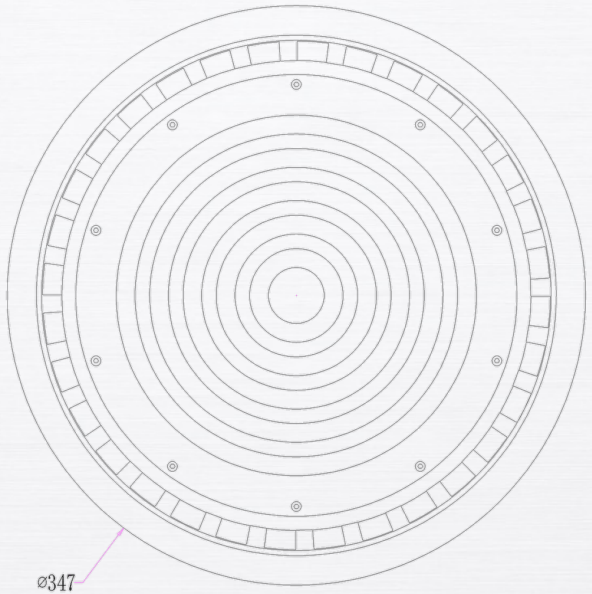





GMTECNOLED







VEGA AD200-5K

GM-VEGA-200W-5KD120-AD

Power: 200W/150W/120W
CCT: 5000K
Lumen: 30000
Optical option: 120° (optional: 60°/90°)
Dimmerable: 1-10V (optional: PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Vega sens 100-4k

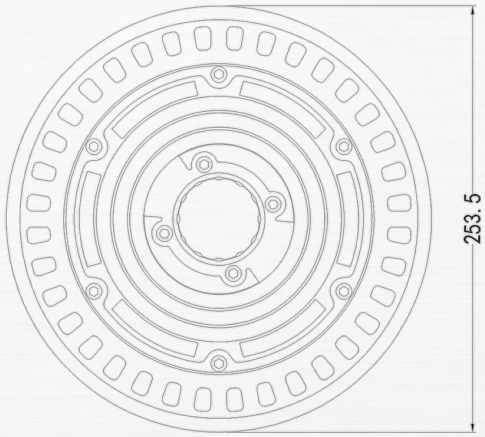

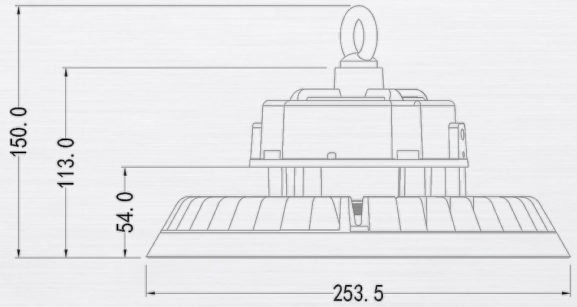





GMTECNOLED







VEGA
SENS 100-4K

GM-VEGA-SNS-100W-4KD90

Power: 100W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 15000
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens 150-4k

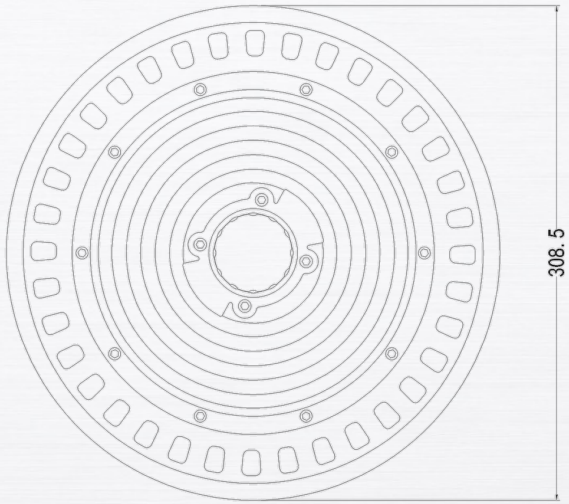

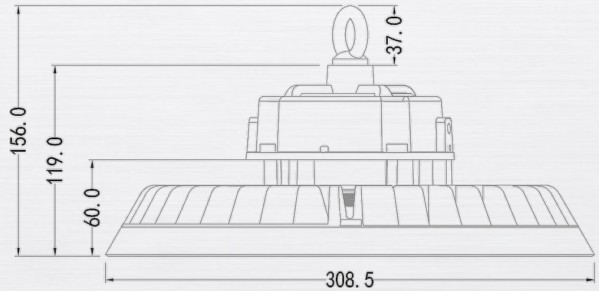





GMTECNOLED







VEGA
SENS 150-4K

GM-VEGA-SNS-150W-4KD90

Power: 150W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 22500
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens 200-4k

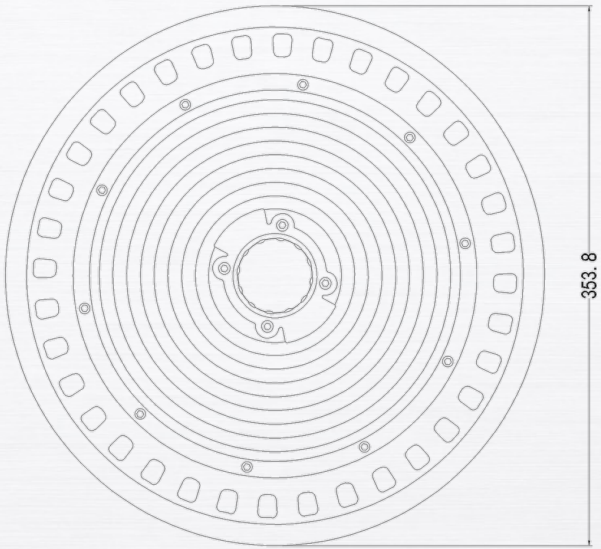

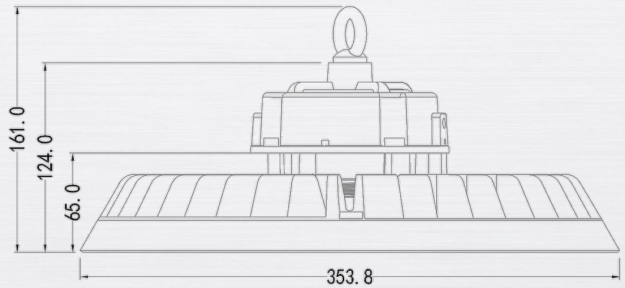





GMTECNOLED





VEGA
SENS 200-4K

GM-VEGA-SNS-200W-4KD90

Power: 200W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 30000
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens 100-5k

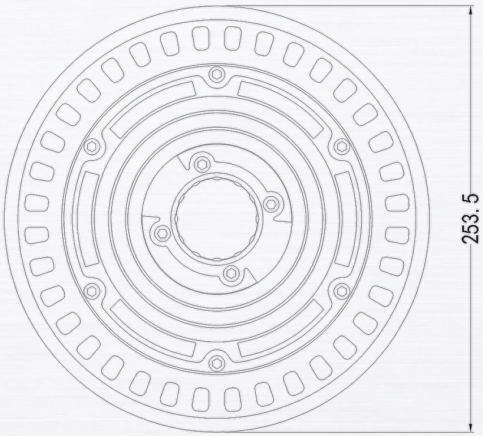


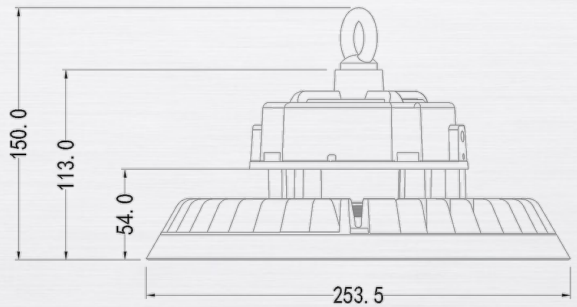





GMTECNOLED

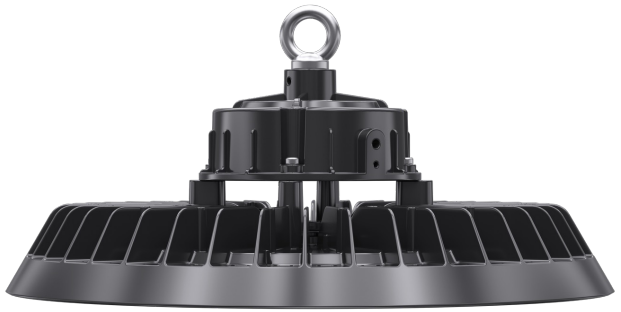





VEGA
SENS 100-5K

GM-VEGA-SNS-100W-5KD90

Power: 100W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 15000
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens 150-5k

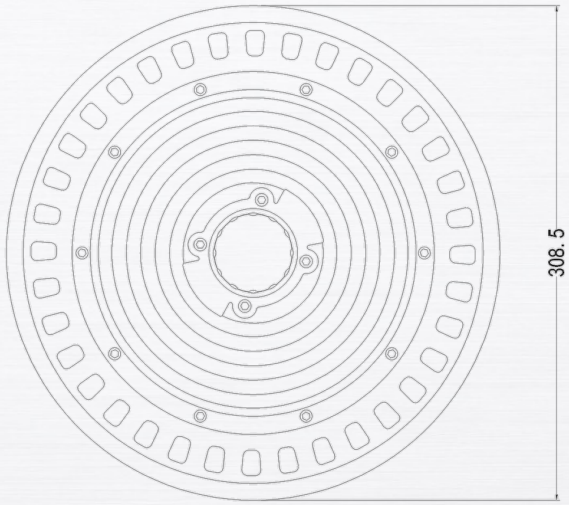

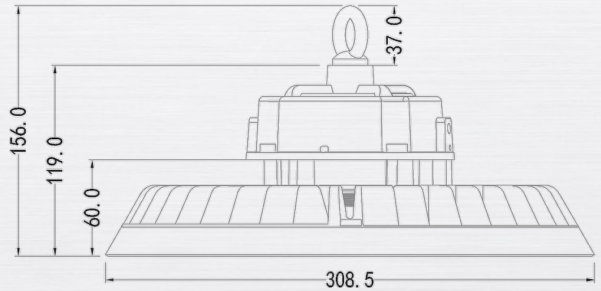





GMTECNOLED







VEGA
SENS 150-5K

GM-VEGA-SNS-150W-5KD90

Power: 150W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 22500
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens 200-5k

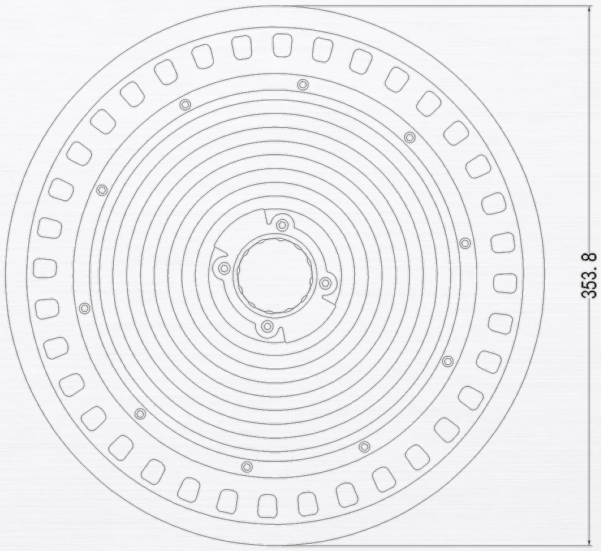

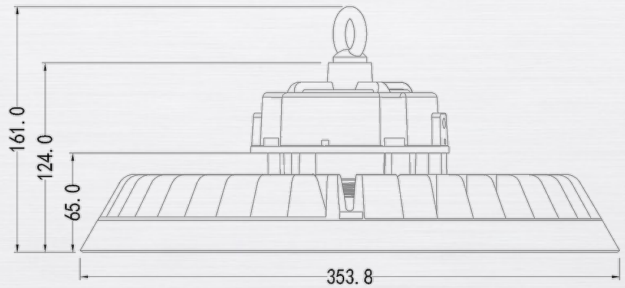





GMTECNOLED







VEGA
SENS 200-5K


GM-VEGA-SNS-200W-5KD90


Power: 200W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 30000
Optical option: 90°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L80B10 >50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

Drawing Vega sens pro 100-4k

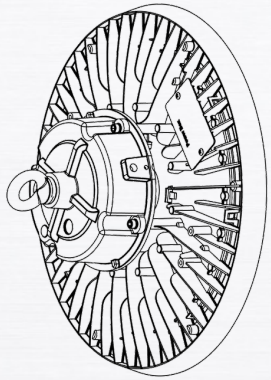

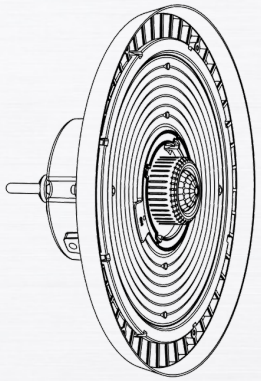


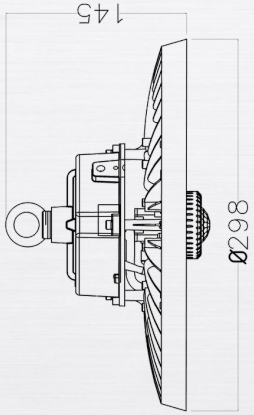


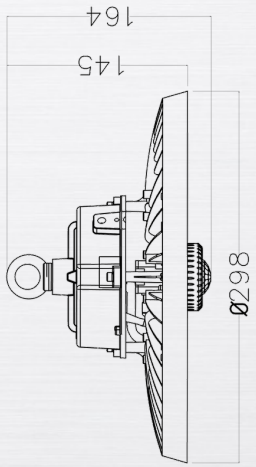



GMTECNOLED

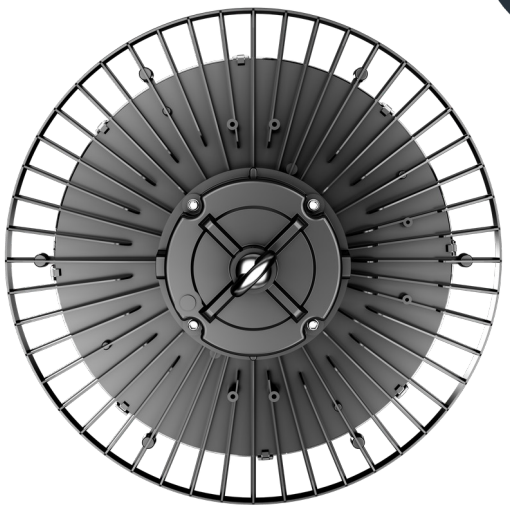

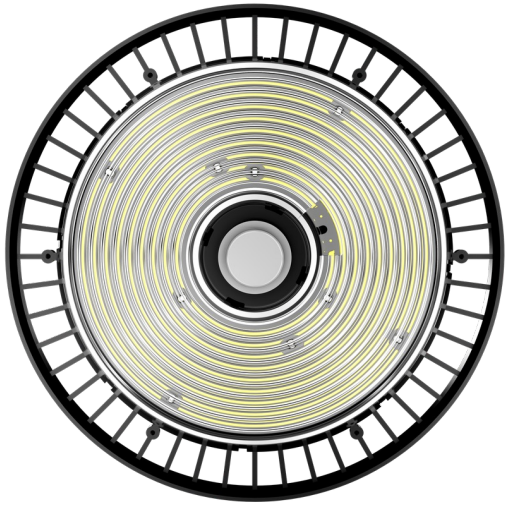



VEGA SENS PRO 100-4K


GM-VEGA-SNS-PRO-100W-4KD90


Power: 100W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 18000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips


Drawing Vega sens pro 150-4k

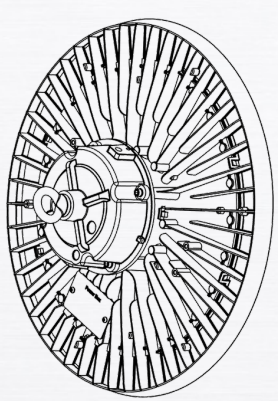

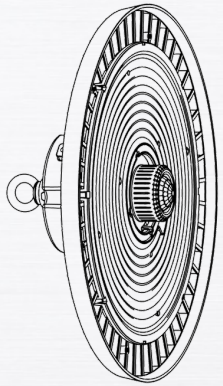

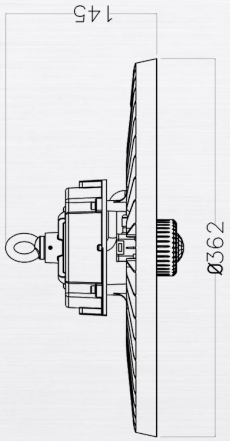


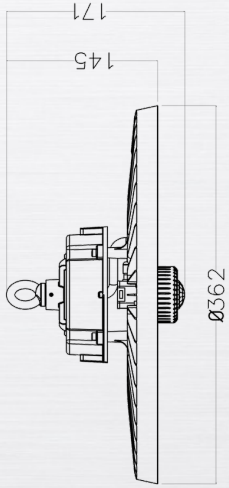


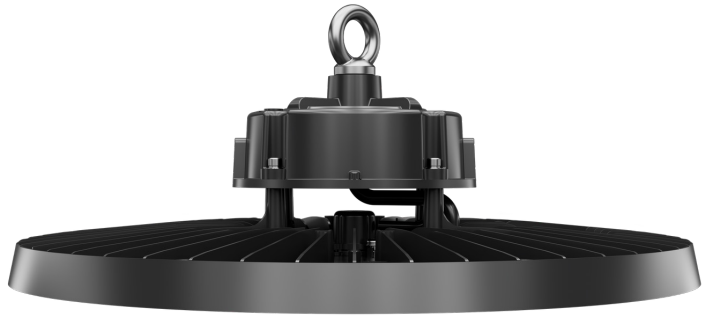



GMTECNOLED

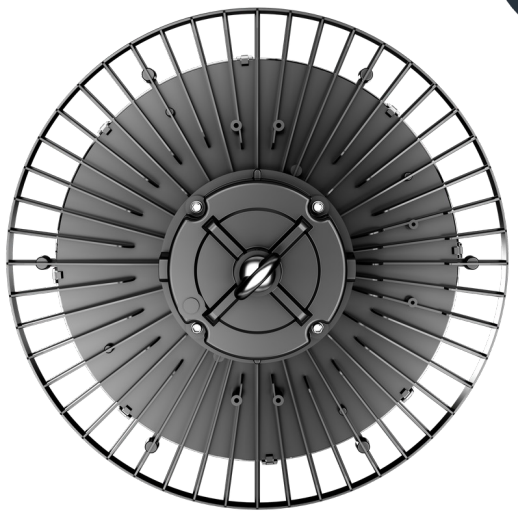

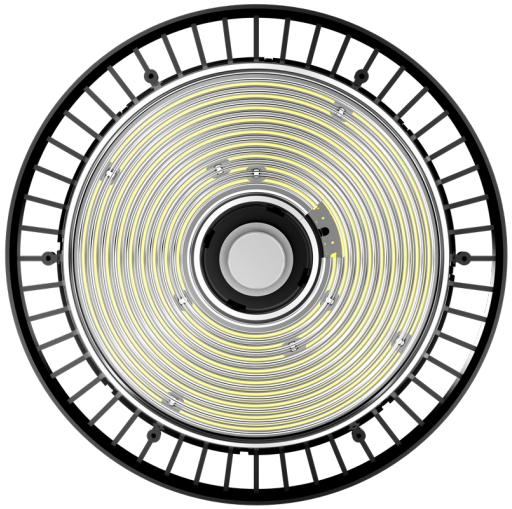


VEGA SENS PRO 150-4K


GM-VEGA-SNS-PRO-150W-4KD90


Power: 150W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 27000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips


GMTECNOLED


Drawing Vega sens pro 200-4k

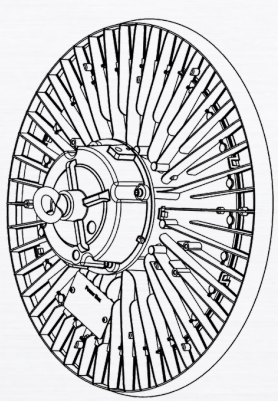

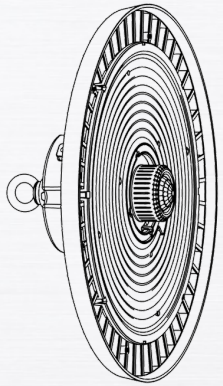

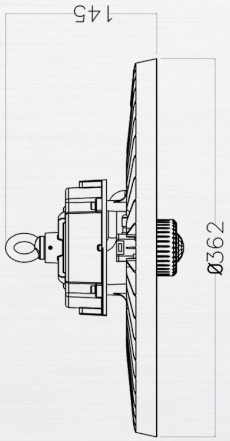


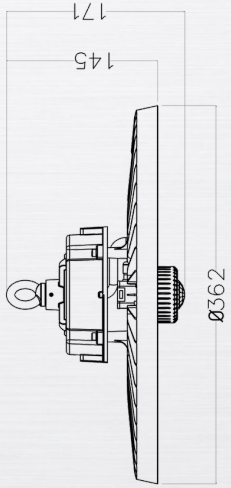


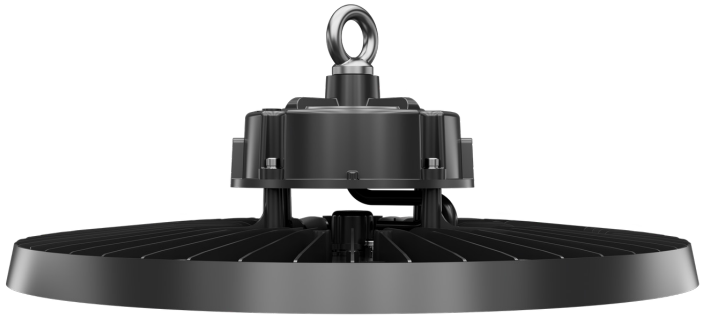



GMTECNOLED

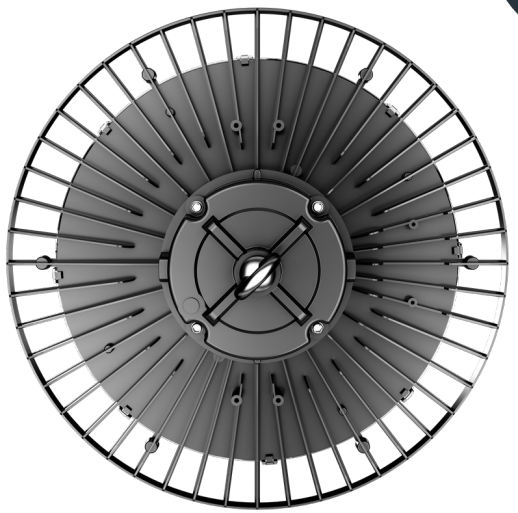

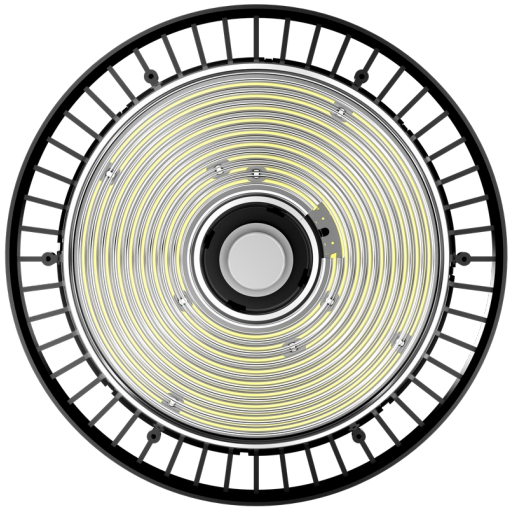



VEGA SENS PRO 200-4K


GM-VEGA-SNS-PRO-200W-4KD90


Power: 200W (optional: DIP switch power adjustable)
CCT: 4000K
Lumen: 36000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips


Drawing Vega sens pro 100-5k

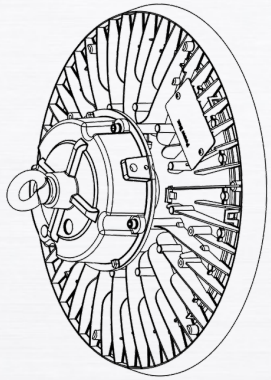

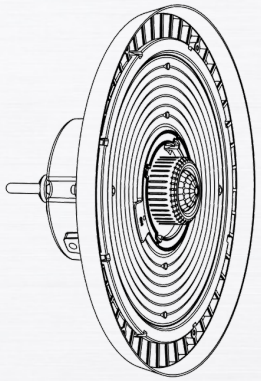

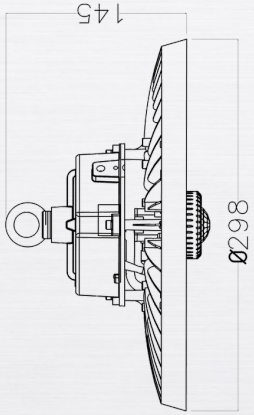


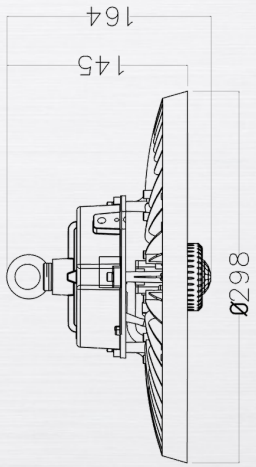


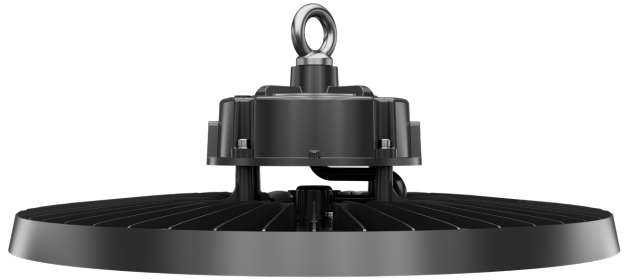



GMTECNOLED

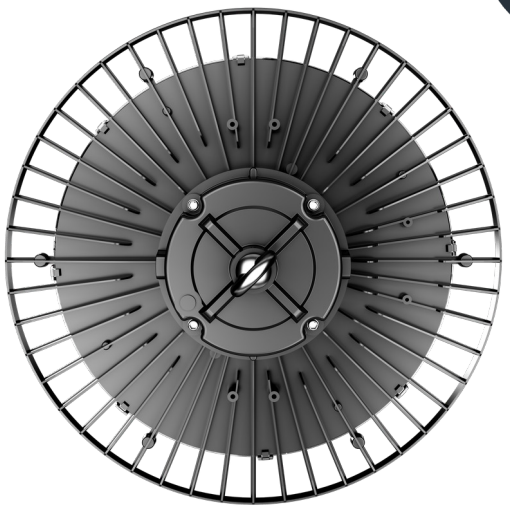

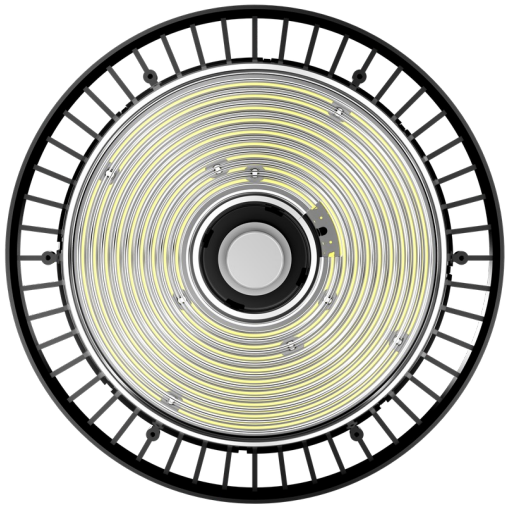



VEGA SENS PRO 100-5K


GM-VEGA-SNS-PRO-100W-5KD90


Power: 100W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 18000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips


Drawing Vega sens pro 150-5k

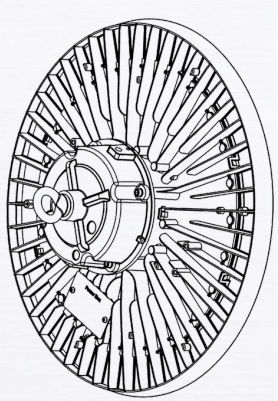

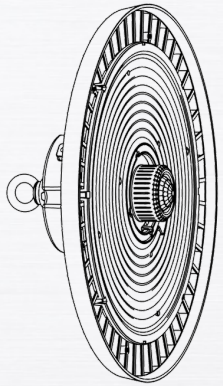

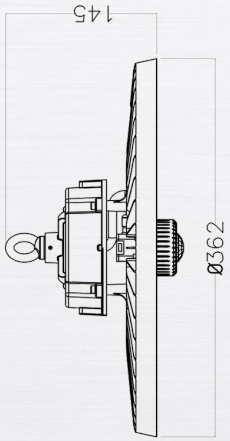


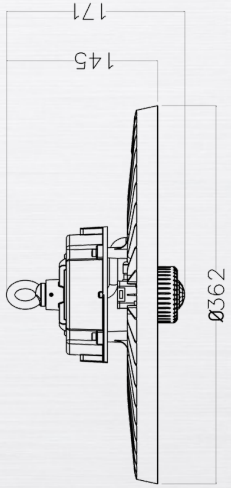


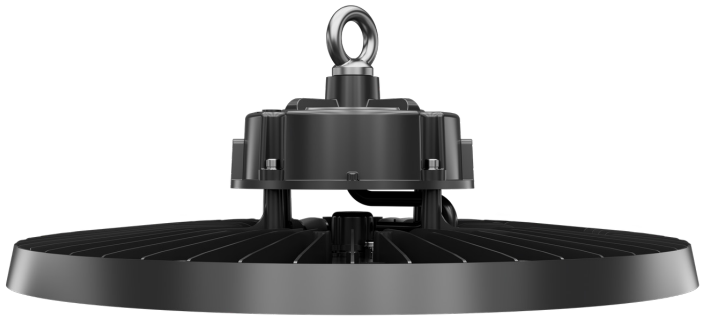



GMTECNOLED

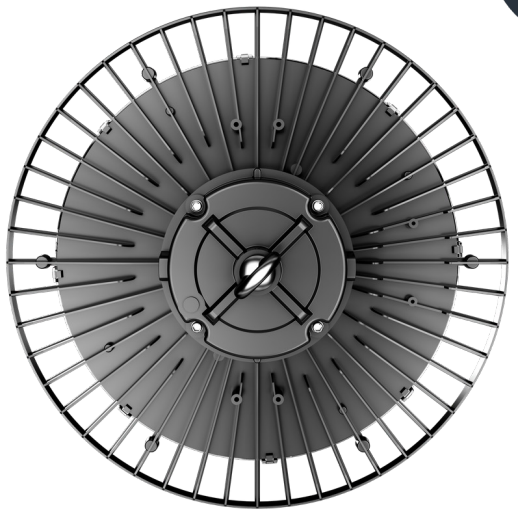

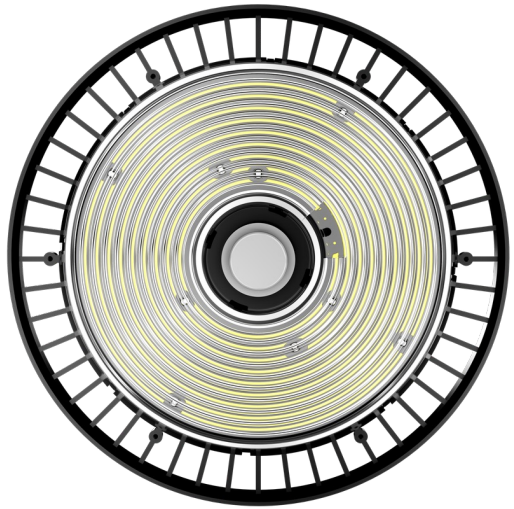


VEGA SENS PRO 150-5K


GM-VEGA-SNS-PRO-150W-5KD90


Power: 150W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 27000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips


GMTECNOLED


Drawing Vega sens pro 200-5k

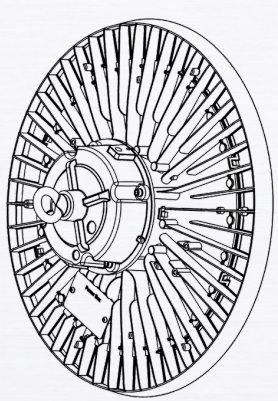

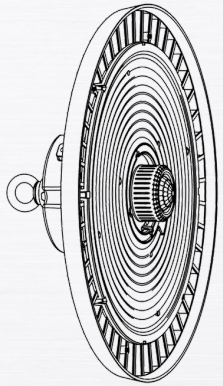

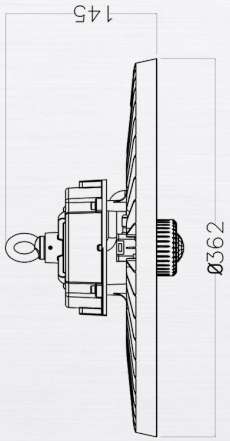


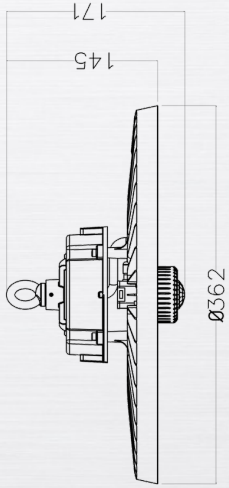


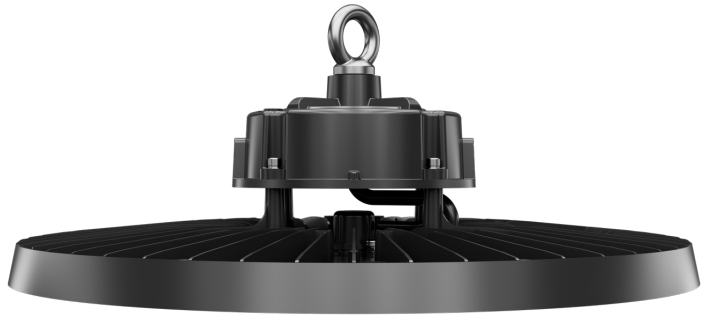



GMTECNOLED

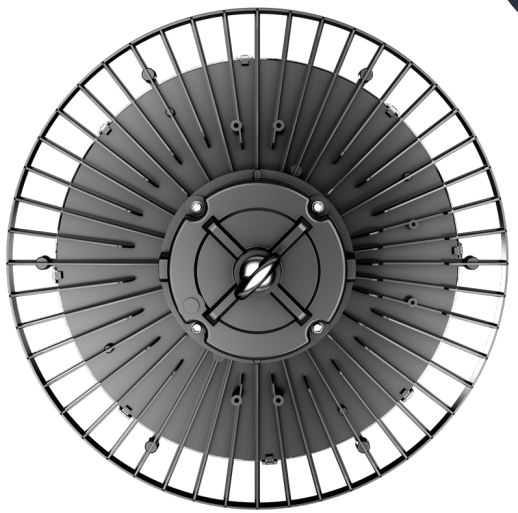

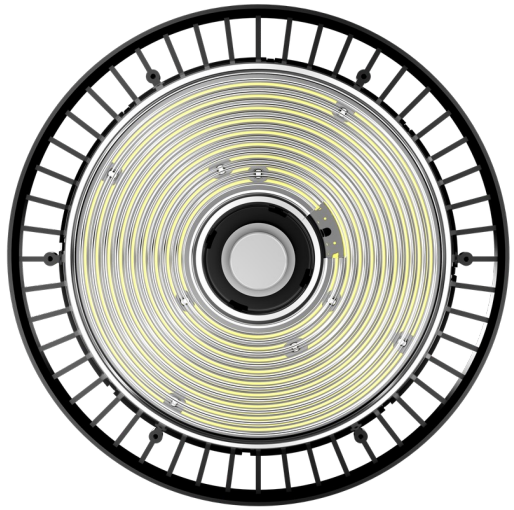


VEGA SENS PRO 200-5K

GM-VEGA-SNS-PRO-200W-5KD90

Power: 200W (optional: DIP switch power adjustable)
CCT: 5000K
Lumen: 36000
Optical option: 90° (optional: 120°)
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming)
CRI: >75
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +60°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: With the possibility of mounting microwave sensor, PIR sensor, Zhaga sensor, Tuya bluetooth sensor
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4KV
Led: Philips

GMTECNOLED

Drawing Altair 030-3k

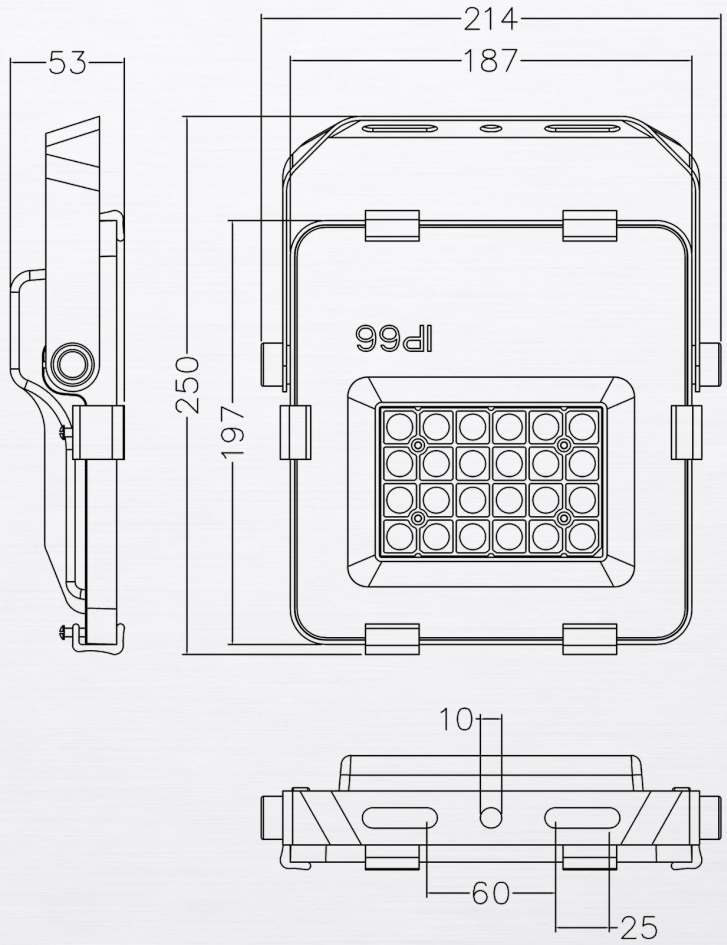





GMTECNOLED

GMTECNOLED

ALTAIR 030-3K


GM-ALTA-30W-3KD120

Power: 30W
CCT: 2700K
Lumen: 4000
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Altair 050-3k

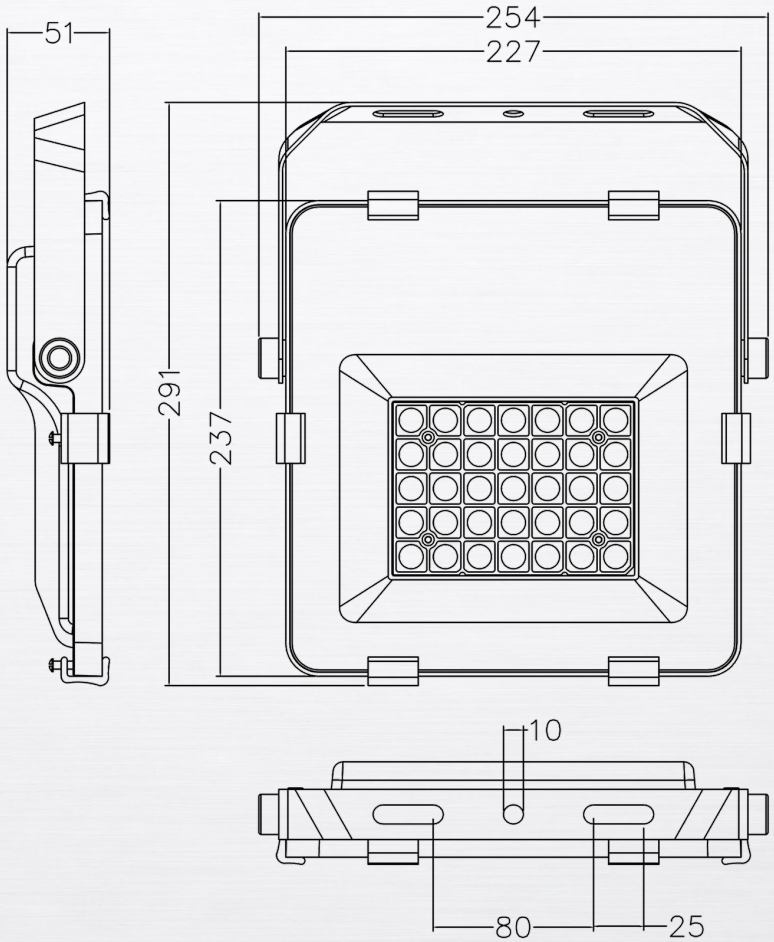





GMTECNOLED

GMTECNOLED

ALTAIR 050-3K


GM-ALTA-50W-3KD120

Power: 50W
CCT: 2700K
Lumen: 6500
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Altair 030-4k

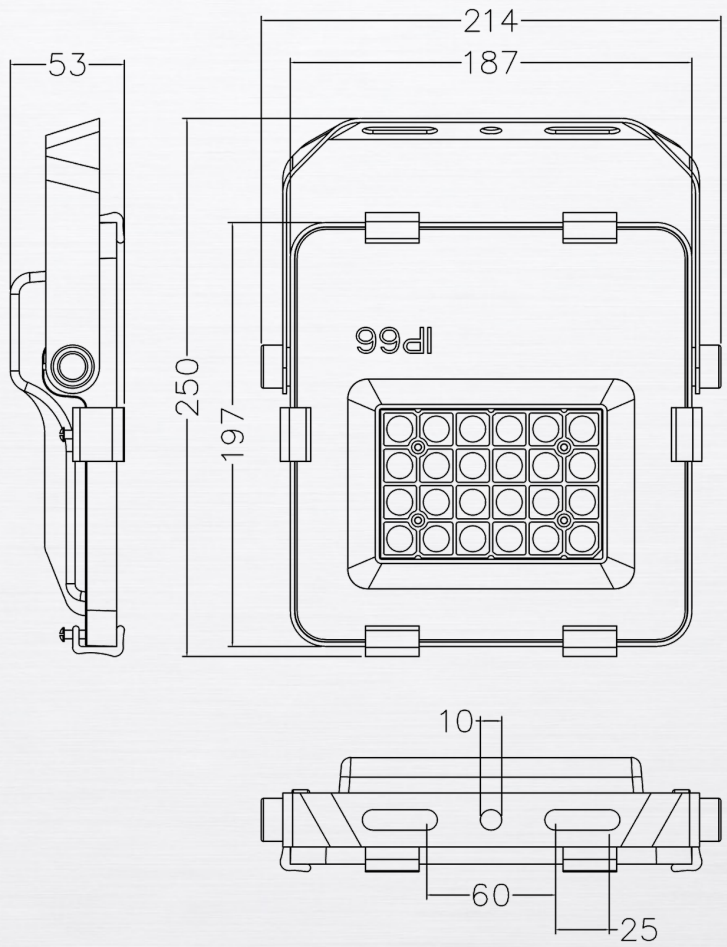





GMTECNOLED

GMTECNOLED

ALTAIR 030-4K


GM-ALTA-30W-4KD120

Power: 30W
CCT: 4000K
Lumen: 4500
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Altair 050-4k

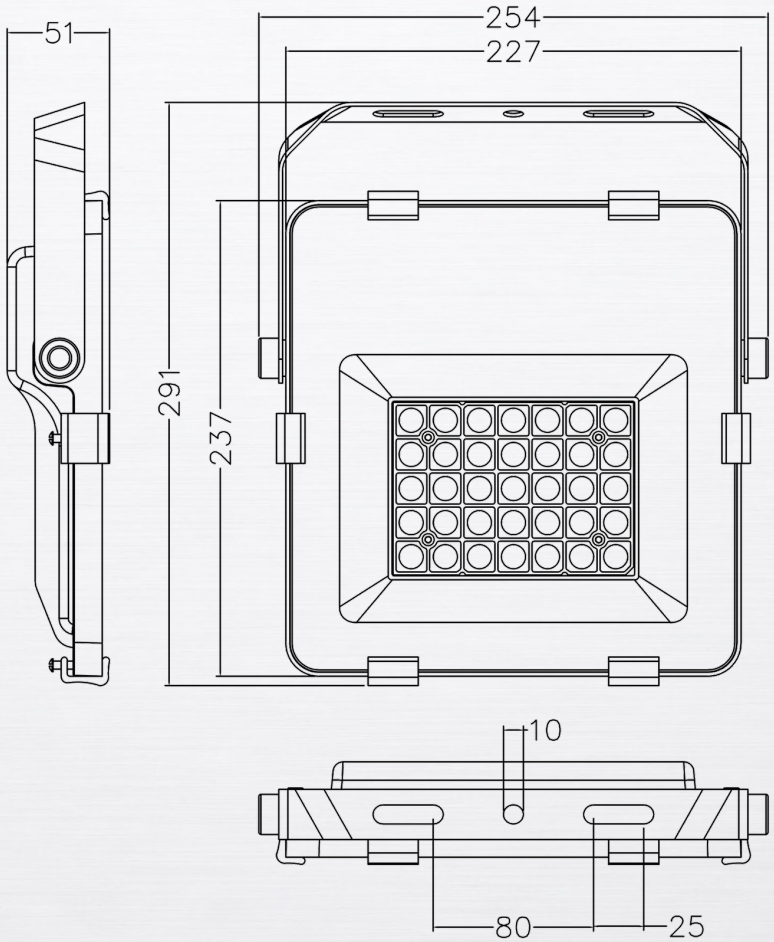





GMTECNOLED

ALTAIR 050-4K


GM-ALTA-50W-4KD120

Power: 50W
CCT: 4000K
Lumen: 7500
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Altair 030-5k

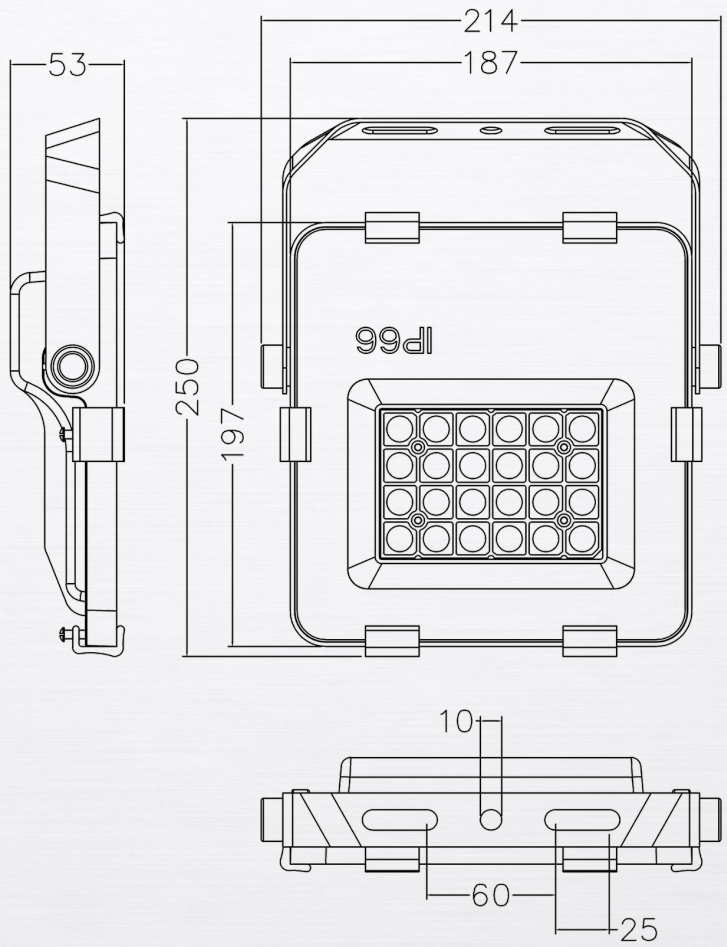





GMTECNOLED

GMTECNOLED

ALTAIR 030-5K


GM-ALTA-30W-5KD120

Power: 30W
CCT: 5000K
Lumen: 4500
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Altair 050-5k

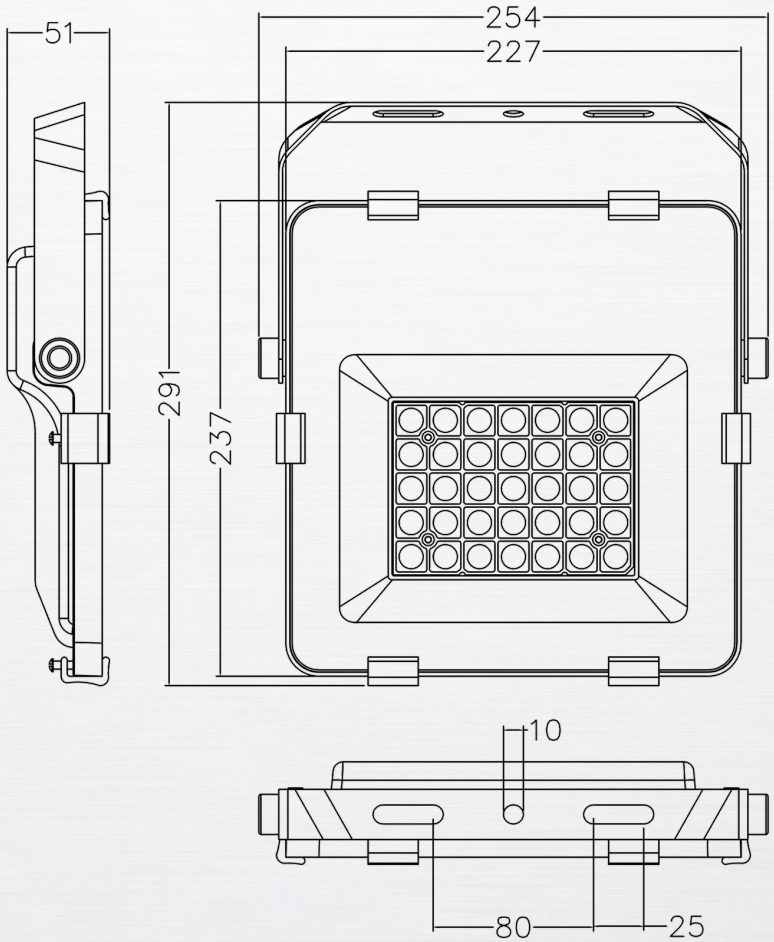





GMTECNOLED

GMTECNOLED

ALTAIR 050-5K

GM-ALTA-50W-5KD120


Power: 50W
CCT: 5000K
Lumen: 7500
Optical option: 120°
Dimmerable: NO
CRI: >70
SDCM: <6
Power factor: >0.5-0.9
Thermal conductivity: 96 W/m*K
TM21: L80B10>35000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -25°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Description: With the possibility of mounting microwave sensor, PIR sensor
Driver: Done
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 1/6KV
Led: Philips





Drawing Albireo pro 240-4k



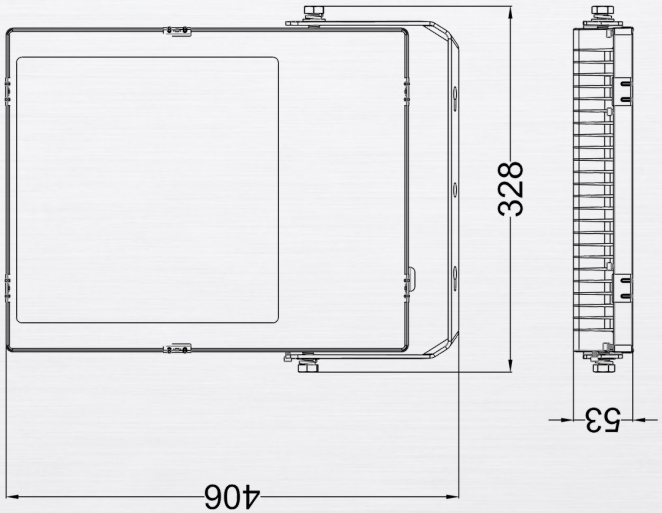





GMTECNOLED

GMTECNOLED


ALBIREO PRO 240-4K

GM-ALBI-PRO-240W-4KMLP30

Power: 240W
CCT: 4000K
Lumen: 40800
Optical option: MLP30 (optional: 30°/60°/90°/100*150°/120*150°/MBP45)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Meanwell
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Cree



Drawing Albireo pro 400-4k

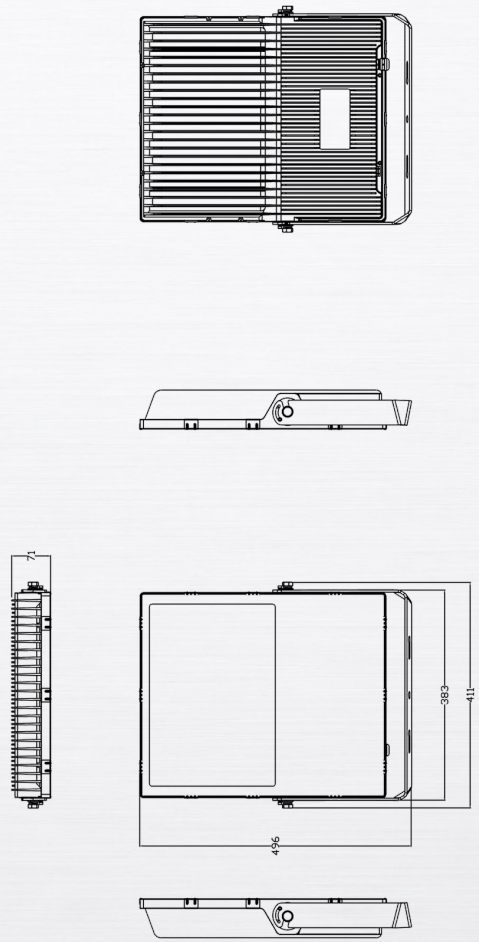



GMTECNOLED




ALBIREO PRO 400-4K


GM-ALBI-PRO-400W-4KMLP30

Power: 400W
CCT: 4000K
Lumen: 68000

Optical option: MLP30 (optional: 30°/60°/90°/100*150°/120*150°/MBP45)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Meanwell
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Cree

Drawing Albireo pro 150-5k

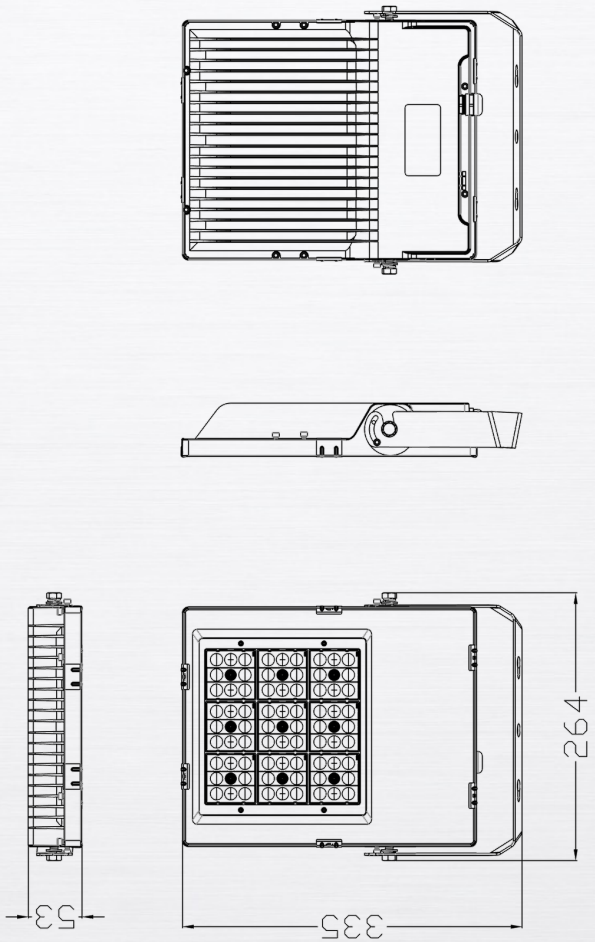

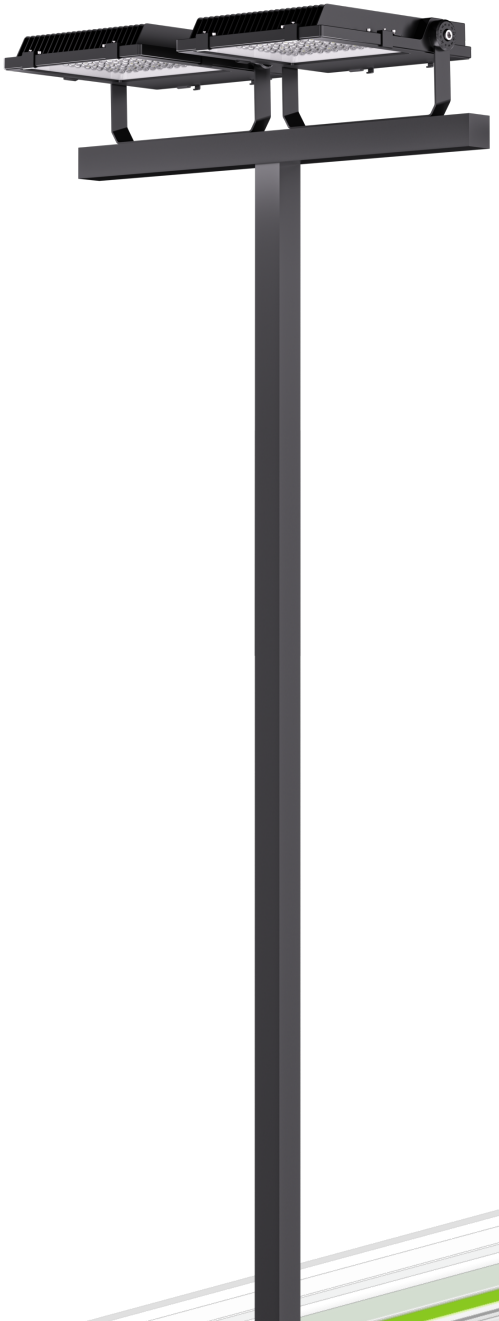

GMTECNOLED






ALBIREO PRO 150-5K

GM-ALBI-PRO-150W-5KTP3

Power: 150W
CCT: 5000K
Lumen: 22500
Optical option: 120*150° (optional: 30°/60°/90°/100*150°/MLP30/MBP45)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Meanwell
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Cree

Drawing Albireo pro 240-5k



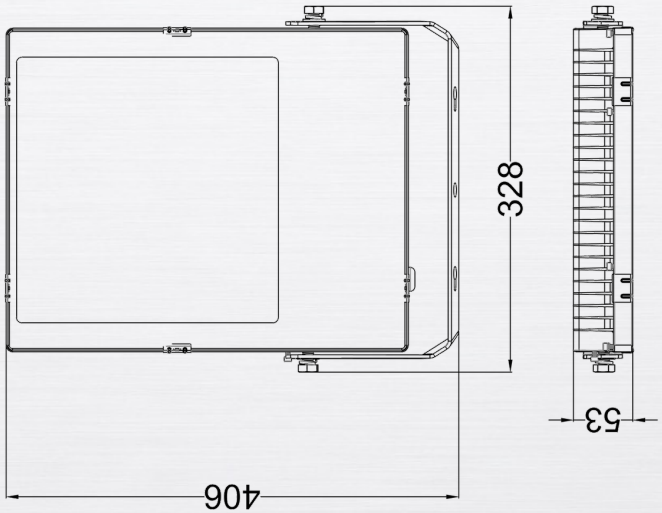





GMTECNOLED

GMTECNOLED


ALBIREO PRO 240-5K



GM-ALBI-PRO-240W-5KMLP30

Power: 240W
CCT: 5000K
Lumen: 40800
Optical option: MLP30 (optional: 30°/60°/90°/100*150°/120*150°/MBP45)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Meanwell
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Cree

Drawing Albireo pro 400-5k

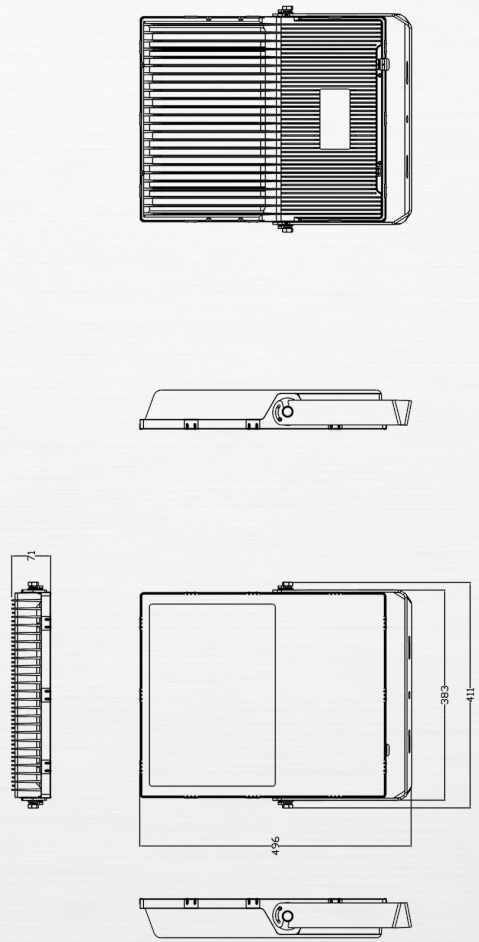



GMTECNOLED




ALBIREO PRO 400-5K

GM-ALBI-PRO-400W-5KMLP30

Power: 400W
CCT: 5000K
Lumen: 68000
Optical option: MLP30 (optional: 30°/60°/90°/100*150°/120*150°/MBP45)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Meanwell
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Cree

Drawing Albireo 100-4k

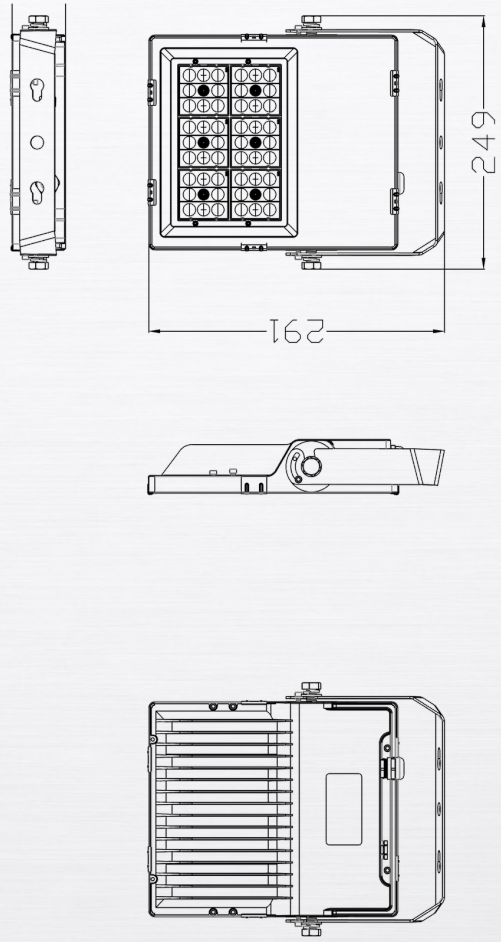



GMTECNOLED


ALBIREO 100-4K

GM-ALBI-100W-4KTP3

Power: 100W
CCT: 4000K
Lumen: 16000
Optical option: 120*150°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips



Drawing Albireo 150-4k

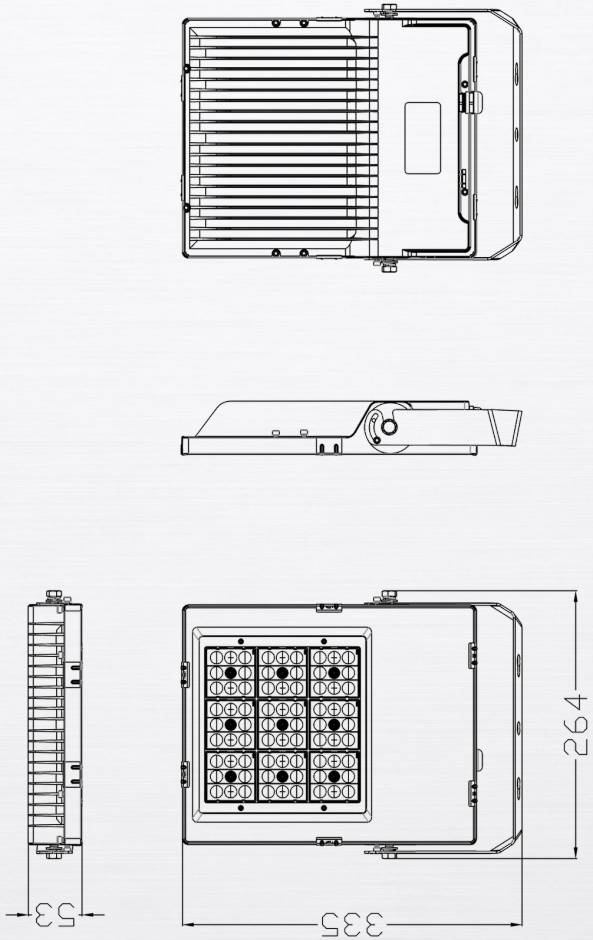



GMTECNOLED




ALBIREO 150-4K

GM-ALBI-150W-4KTP3

Power: 150W
CCT: 4000K
Lumen: 25500
Optical option: 120*150°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 200-4k



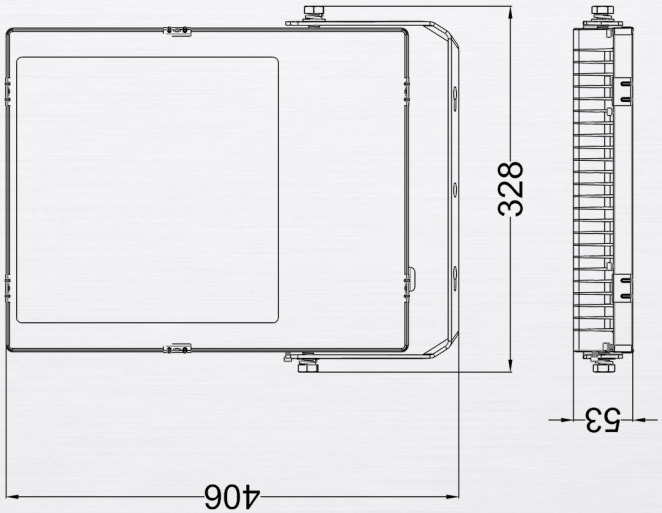



GMTECNOLED

GMTECNOLED

ALBIREO 200-4K





GM-ALBI-200W-4KP45

Power: 200W

CCT: 4000K

Lumen: 34000

Optical option: P45

Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)

CRI: >70

SDCM: ≤5

Power factor: >0.95

Thermal conductivity: 96 W/m*K

TM21: L70B10>108000hr

Degree of protection: IP66

Impact protection: IK08 (IK10 with stainless steel mesh protection)

Operating temperature: -40°C - +45°C

Photobiological Risk: RG0/1

Wall mounted

Driver: Sosen


Voltage - Frequency: 100-277V - 50/60Hz

Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)

Led: Philips

Drawing Albireo 240-4k



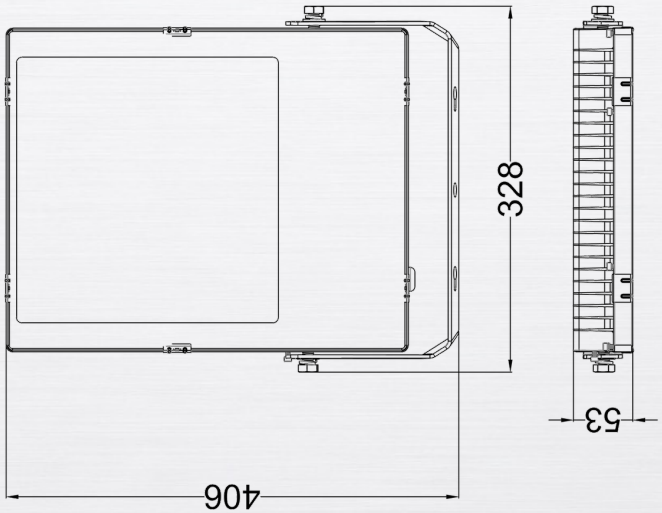



GMTECNOLED




ALBIREO 240-4K

GM-ALBI-240W-4KP45

Power: 240W
CCT: 4000K
Lumen: 40800
Optical option: P45
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 400-4k

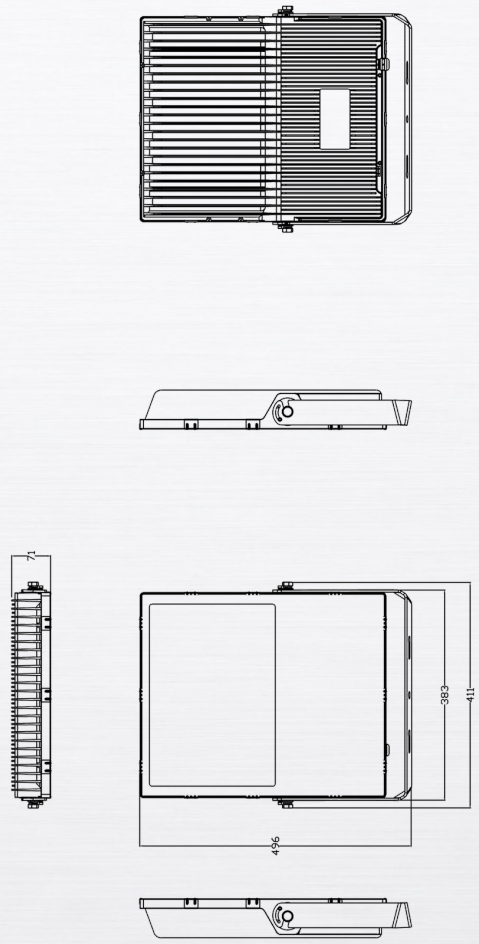





GMTECNOLED




ALBIREO 400-4K

GM-ALBI-400W-4KP45

Power: 400W
CCT: 4000K
Lumen: 68000
Optical option: P45
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 100-5k

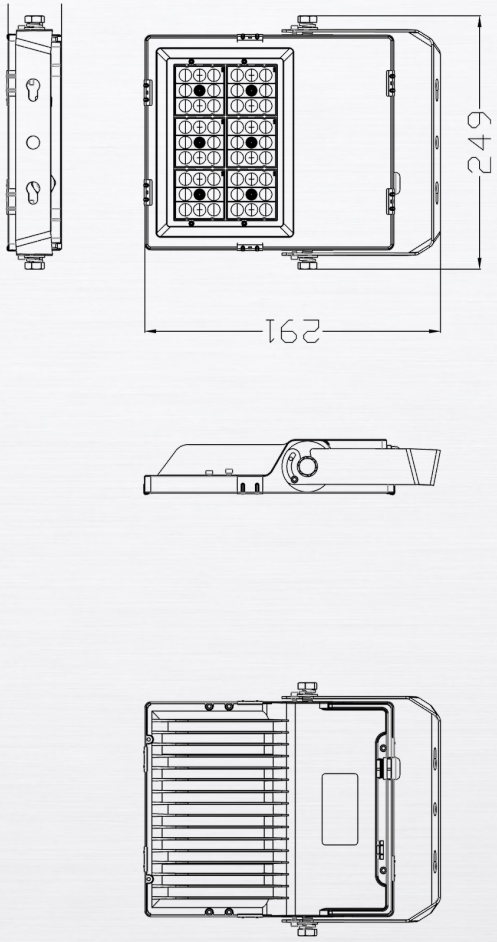



GMTECNOLED


ALBIREO 100-5K

GM-ALBI-100W-5KTP3

Power: 100W
CCT: 5000K
Lumen 16000
Optical option: 120*150°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips



Drawing Albireo 150-5k

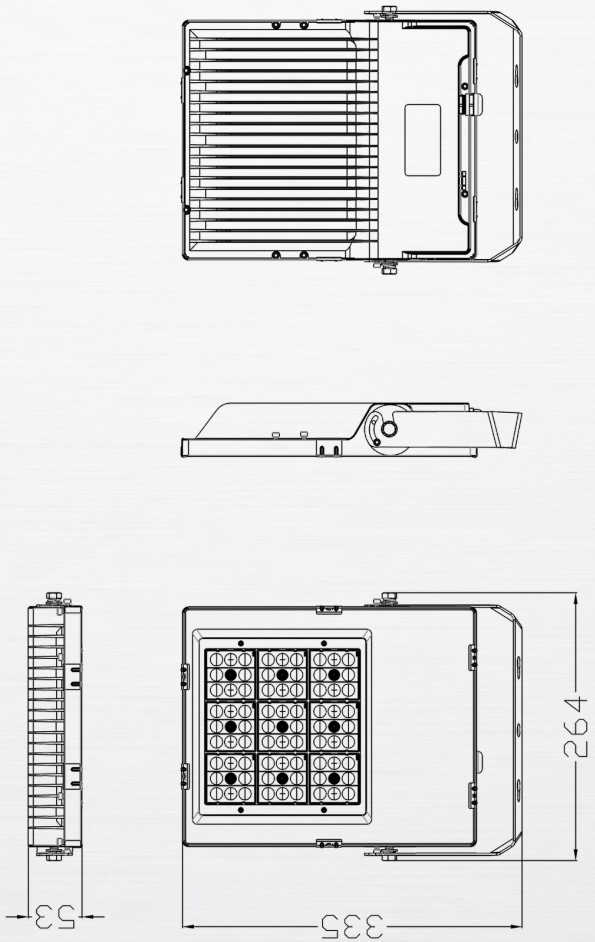



GMTECNOLED

GMTECNOLED

ALBIREO 150-5K




GM-ALBI-150W-5KTP3

Power: 150W
CCT: 5000K
Lumen: 25500
Optical option: 120*150°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 200-5k



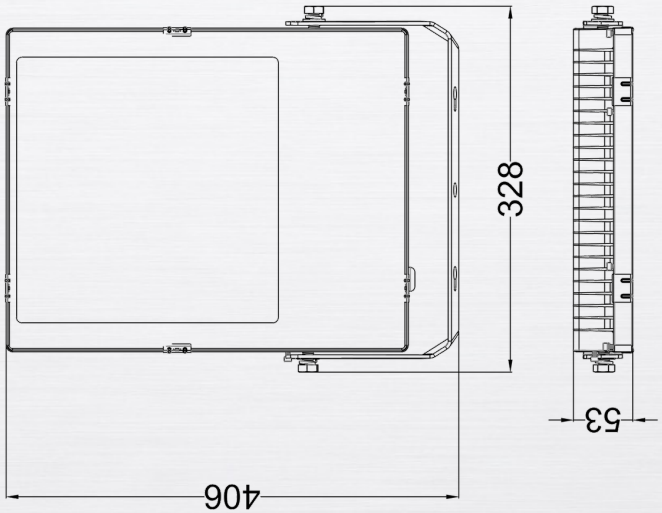



GMTECNOLED




ALBIREO 200-5K

GM-ALBI-200W-5KP45

Power: 200W
CCT: 5000K
Lumen: 34000
Optical option: P45
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 240-5k



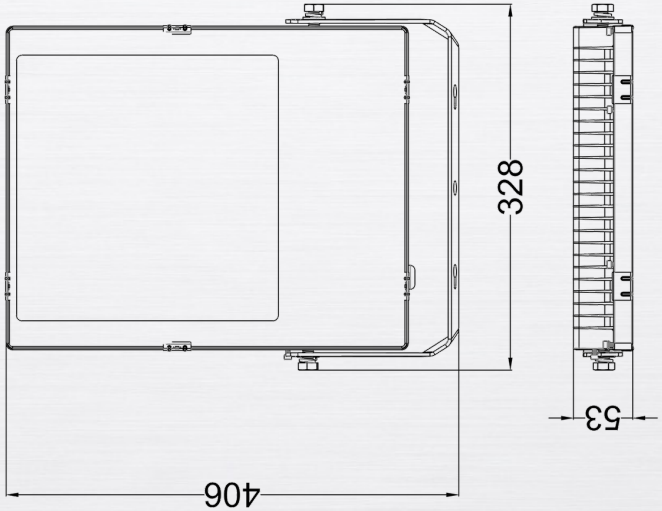





GMTECNOLED






ALBIREO 240-5K

GM-ALBI-240W-5KP45

Power: 240W
CCT: 5000K
Lumen: 40800
Optical option: P45 (optional: 25°)
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo 400-5k

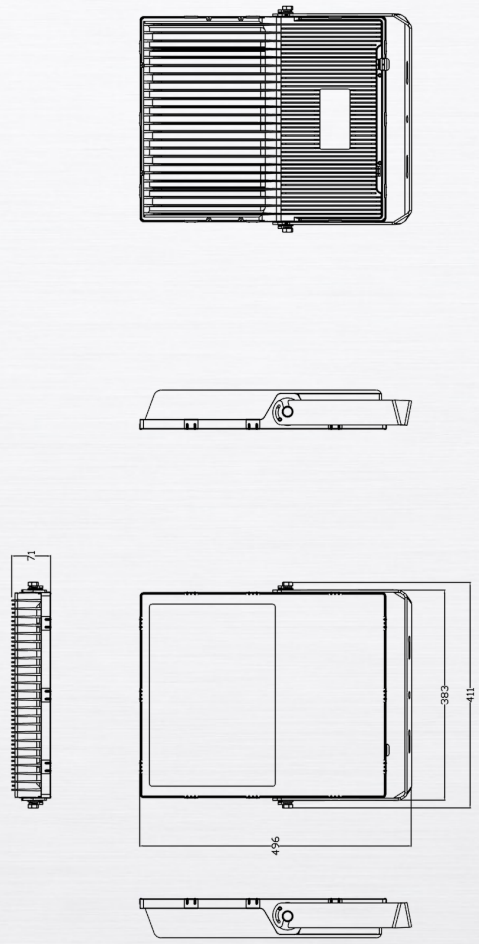





GMTECNOLED

GMTECNOLED


ALBIREO 400-5K


GM-ALBI-400W-5KP45

Power: 400W
CCT: 5000K
Lumen: 68000
Optical option: P45
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips



Drawing Mintaka 050-3k

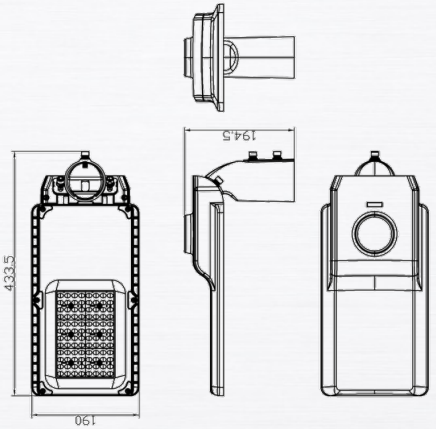

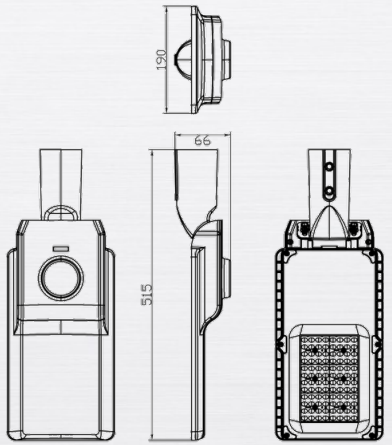



GMTECNOLED


MINTAKA 050-3K


GM-MINT-050W-3KTP2


Power: 50W/40W/30W/20W
CCT: 2700K
Lumen: 6750
Optical option: Type2 (optional: Type3/Type4/Type5)
Dimmerable: NO (optional: 0/1-10V, PWM, Triac dimming or Astro DIM)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Drive: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)



Drawing Mintaka 100-3k

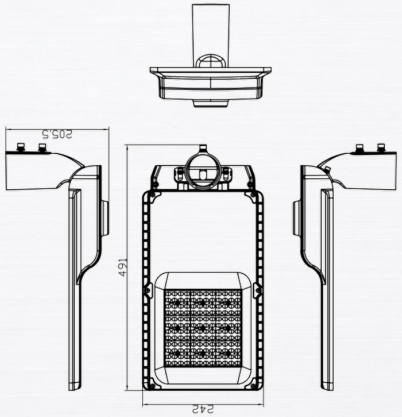

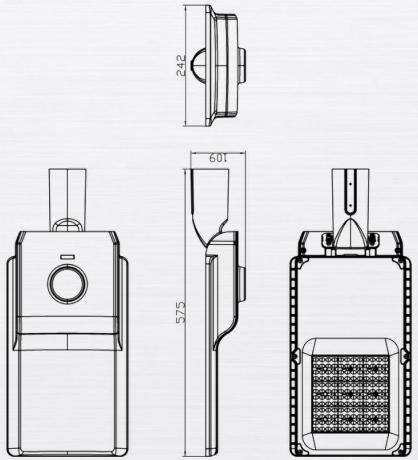

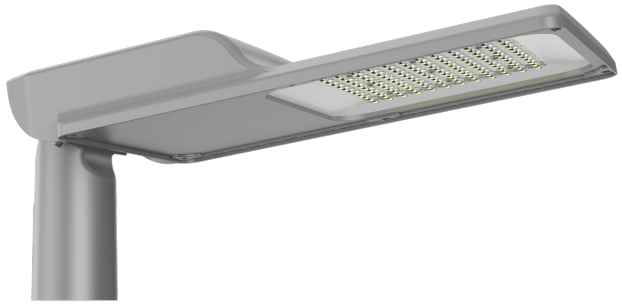




GMTECNOLED


MINTAKA 100-3K


GM-MINT-100W-3KTP2

Power: 100W/80W/60W/40W
CCT: 2700K
Lumen: 13500
Optical option: Type2 (optional: Type3/Type4/Type5)
Dimmerable: NO (optional: 0/1-10V, PWM, Triac dimming or Astro DIM)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Drive: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)

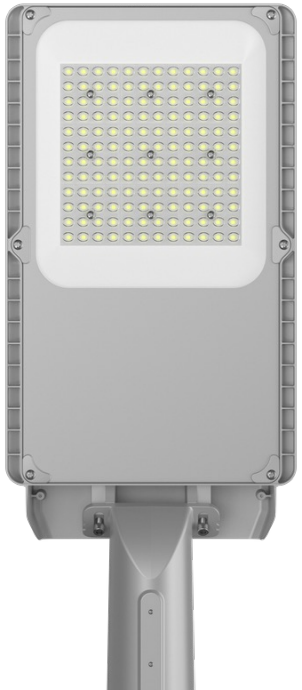

Drawing Mintaka 050-4k

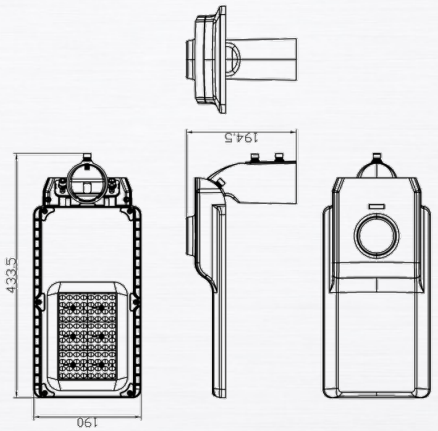

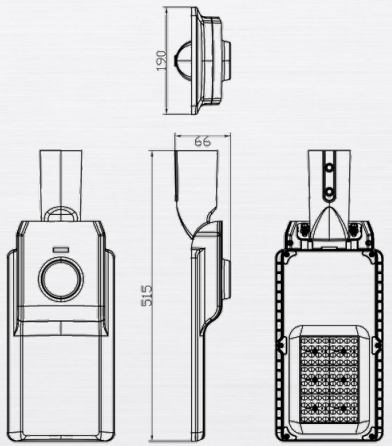




GMTECNOLED

GMTECNOLED


MINTAKA 050-4K

GM-MINT-050W-4KTP2

Power: 50W/40W/30W/20W
CCT: 4000K
Lumen: 7500
Optical option: Type2 (optional: Type3/Type4/Type5)
Dimmerable: NO (optional: 0/1-10V, PWM, Triac dimming or Astro DIM)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Drive: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)

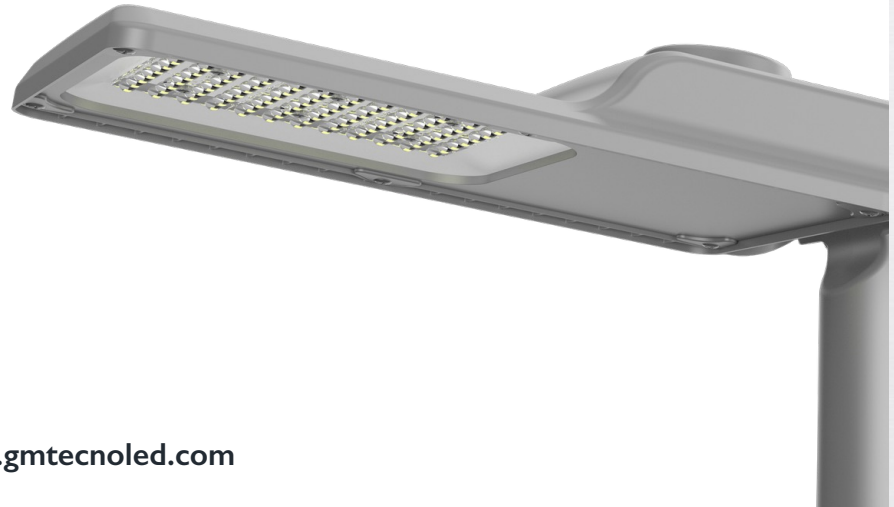

Drawing Mintaka 080-4k

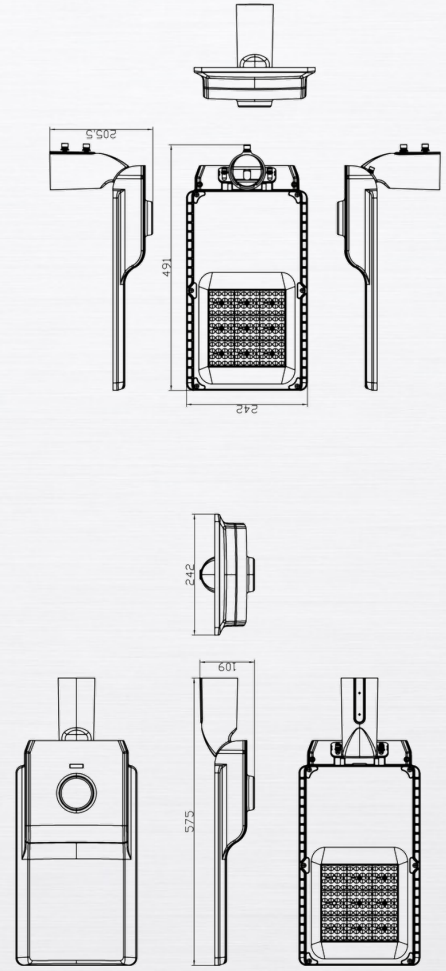




GMTECNOLED


MINTAKA 080-4K

GM-MINT-080W-4KTP2

Power: 80W/65W/50W/30W
CCT: 4000K
Lumen: 12000
Optical option: Type2 (optional: Type3/Type4/Type5)
Dimmerable: NO (optional: 0/1-10V, PWM, Triac dimming or Astro DIM)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Drive: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)

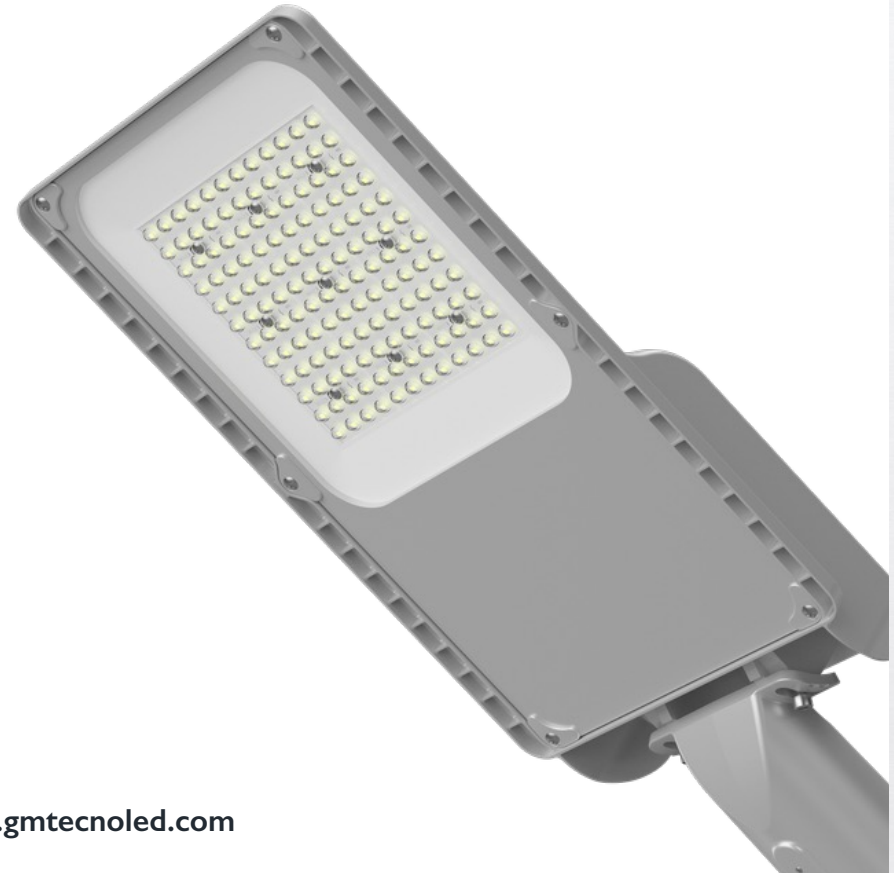

Drawing Mintaka 100-4k

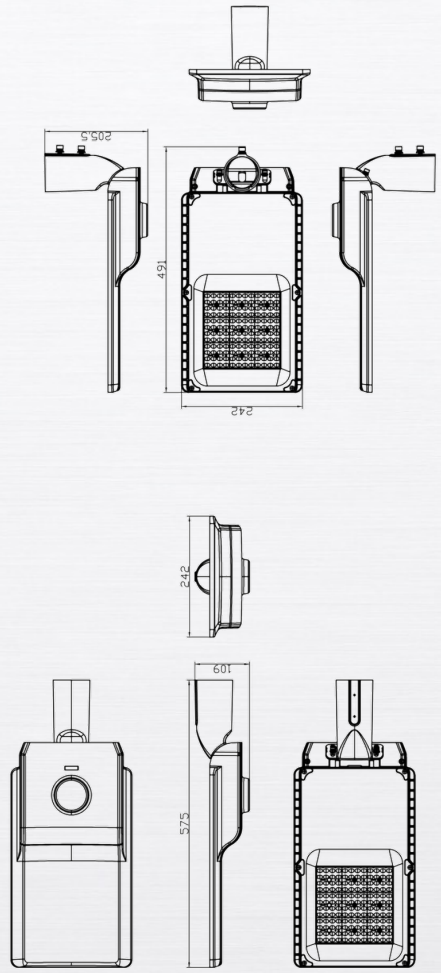




GMTECNOLED

GMTECNOLED


MINTAKA 100-4K

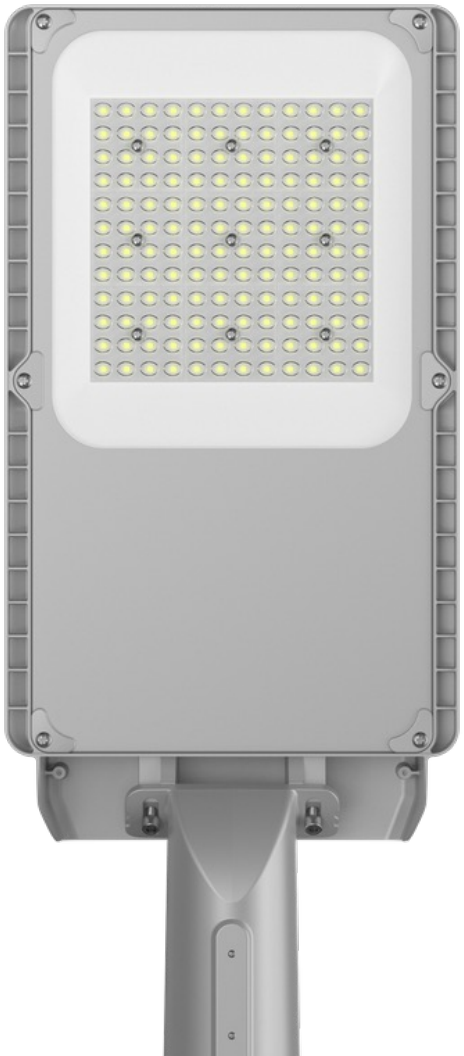


GM-MINT-100W-4KTP2

Power: 100W/80W/60W/40W
CCT: 4000K
Lumen: 15000
Optical option: Type2 (optional: Type3/Type4/Type5)
Dimmerable: NO (optional: 0/1-10V, PWM, Triac dimming or Astro DIM)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Drive: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)

Drawing Polluce 40-3k

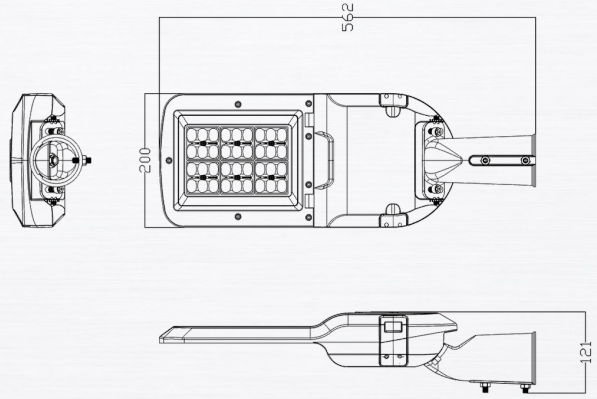

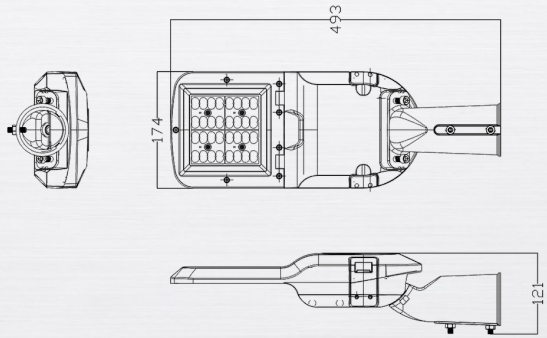



GMTECNOLED


POLLUCE 40-3K


GM-POLL-40W-3KTP3

Power: 0-40W
CCT: 2700K
Lumen: 160lm/W
Optical option: Type3 (optional: T2M/T2S/T3M/T3S/T4S)
Dimmerable: Astro DIM (optional: 0/1-10V, PWM, Triac dimming, Moso DALI-2+D4I class II)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Sosen (optional: Moso)
Voltage - Frequency: 100-277V (with Moso driver: 176-305V) - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)



Drawing Polluce 80-3k

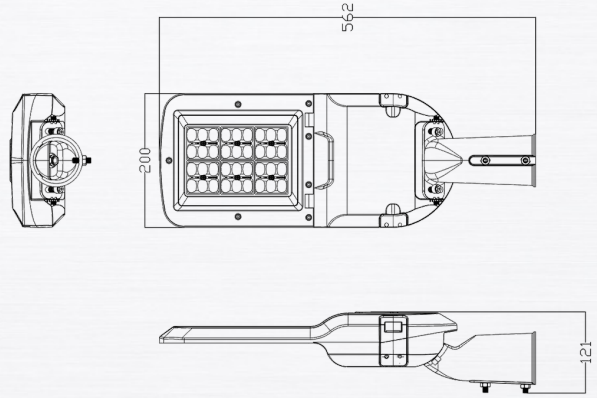

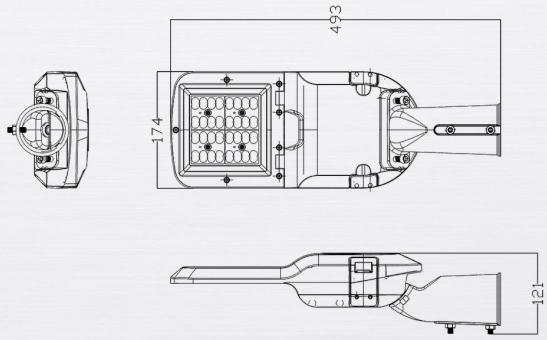



GMTECNOLED


POLLUCE 80-3K


GM-POLL-80W-3KTP3


Power: 0-80W
CCT: 2700K
Lumen: 160lm/W
Optical option: Type3 (optional: T2M/T2S/T3M/T3S/T4S)
Dimmerable: Astro DIM (optional: 0/1-10V, PWM, Triac dimming, Moso DALI-2+D4I class II)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Sosen (optional: Moso)
Voltage - Frequency: 100-277V (with Moso driver: 176-305V) - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)



Drawing Polluce 40-4k

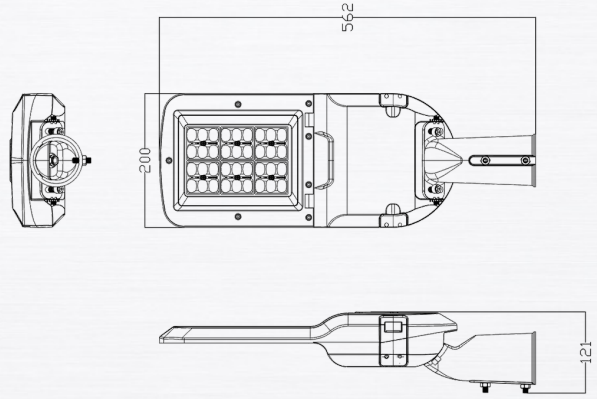

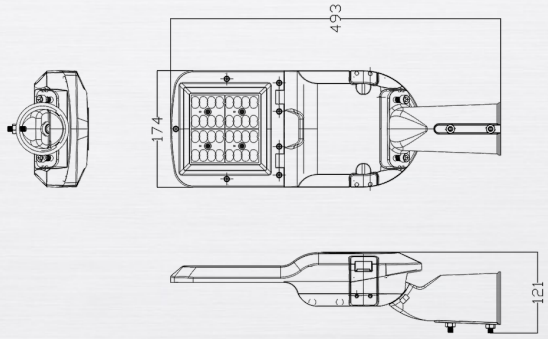

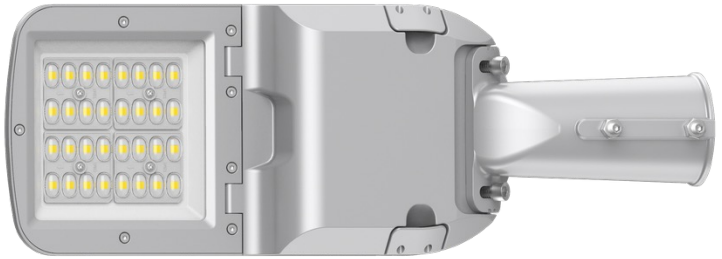



GMTECNOLED

GMTECNOLED


POLLUCE 40-4K




GM-POLL-40W-4KTP3

Power: 0-40W
CCT: 4000K
Lumen: 180lm/W
Optical option: Type3 (optional: T2M/T2S/T3M/T3S/T4S)
Dimmerable: Astro DIM (optional: 0/1-10V, PWM, Triac dimming, Moso DALI-2+D4I class II)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Sosen (optional: Moso)
Voltage - Frequency: 100-277V (with Moso driver: 176-305V) - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)

Drawing Polluce 80-4k

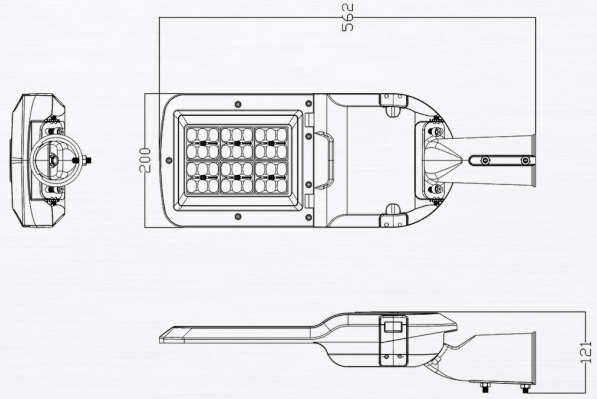

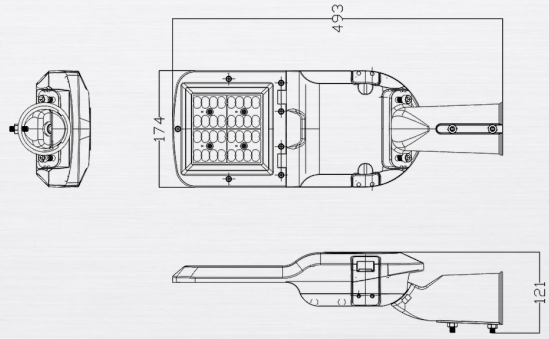





GMTECNOLED


GMTECNOLED

POLLUCE 80-4K

GM-POLL-80W-4KTP3

Power: 0-80W
CCT: 4000K
Lumen: 180lm/W
Optical option: Type3 (optional: T2M/T2S/T3M/T3S/T4S)
Dimmerable: Astro DIM (optional: 0/1-10V, PWM, Triac dimming, Moso DALI-2+D4I class II)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +40°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Sosen (optional: Moso)
Voltage - Frequency: 100-277V (with Moso driver: 176-305V) - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)



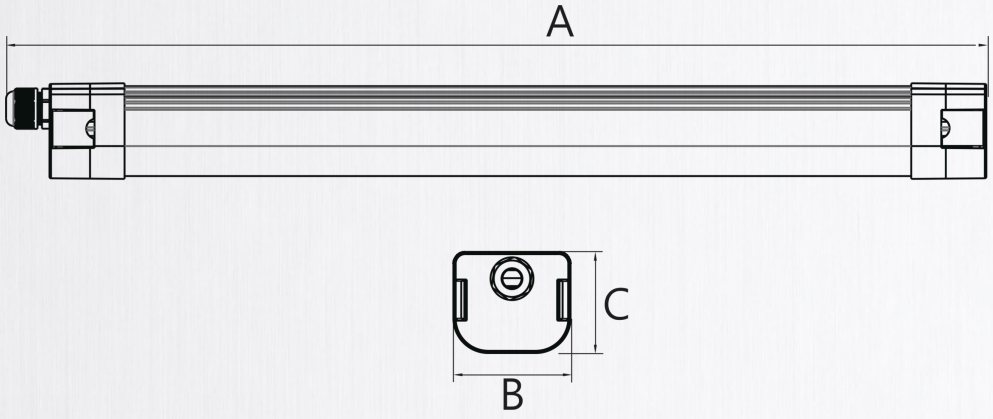

Drawing Gomeisa 20-4k

	A	B	C
20W	659mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm








GOMEISA 20-4K

GM-GOME-20W-4KD120

Power: 20W
CCT: 4000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 2800
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

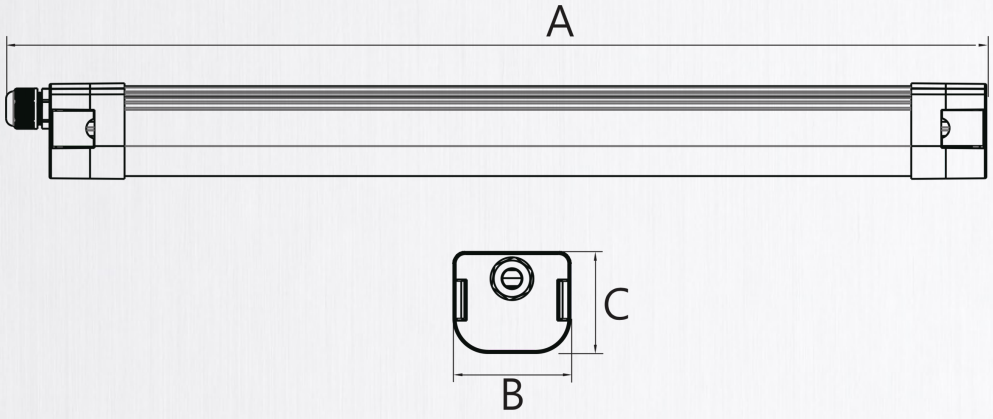

Drawing Gomeisa 40-4k

	A	B	C
20W	659mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA 40-4K

GM-GOME-40W-4KD120


Power: 40W
CCT: 4000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 5600
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

GMTECNOLED

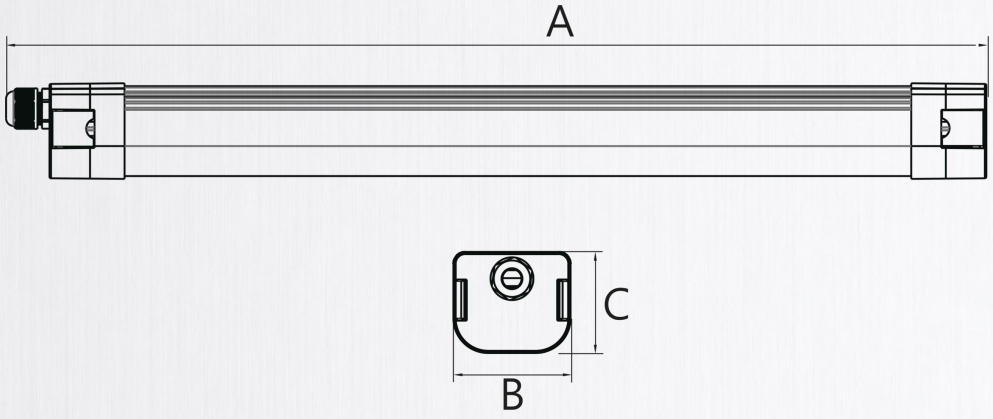

Drawing Gomeisa 60-4k

	A	B	C
20W	659mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

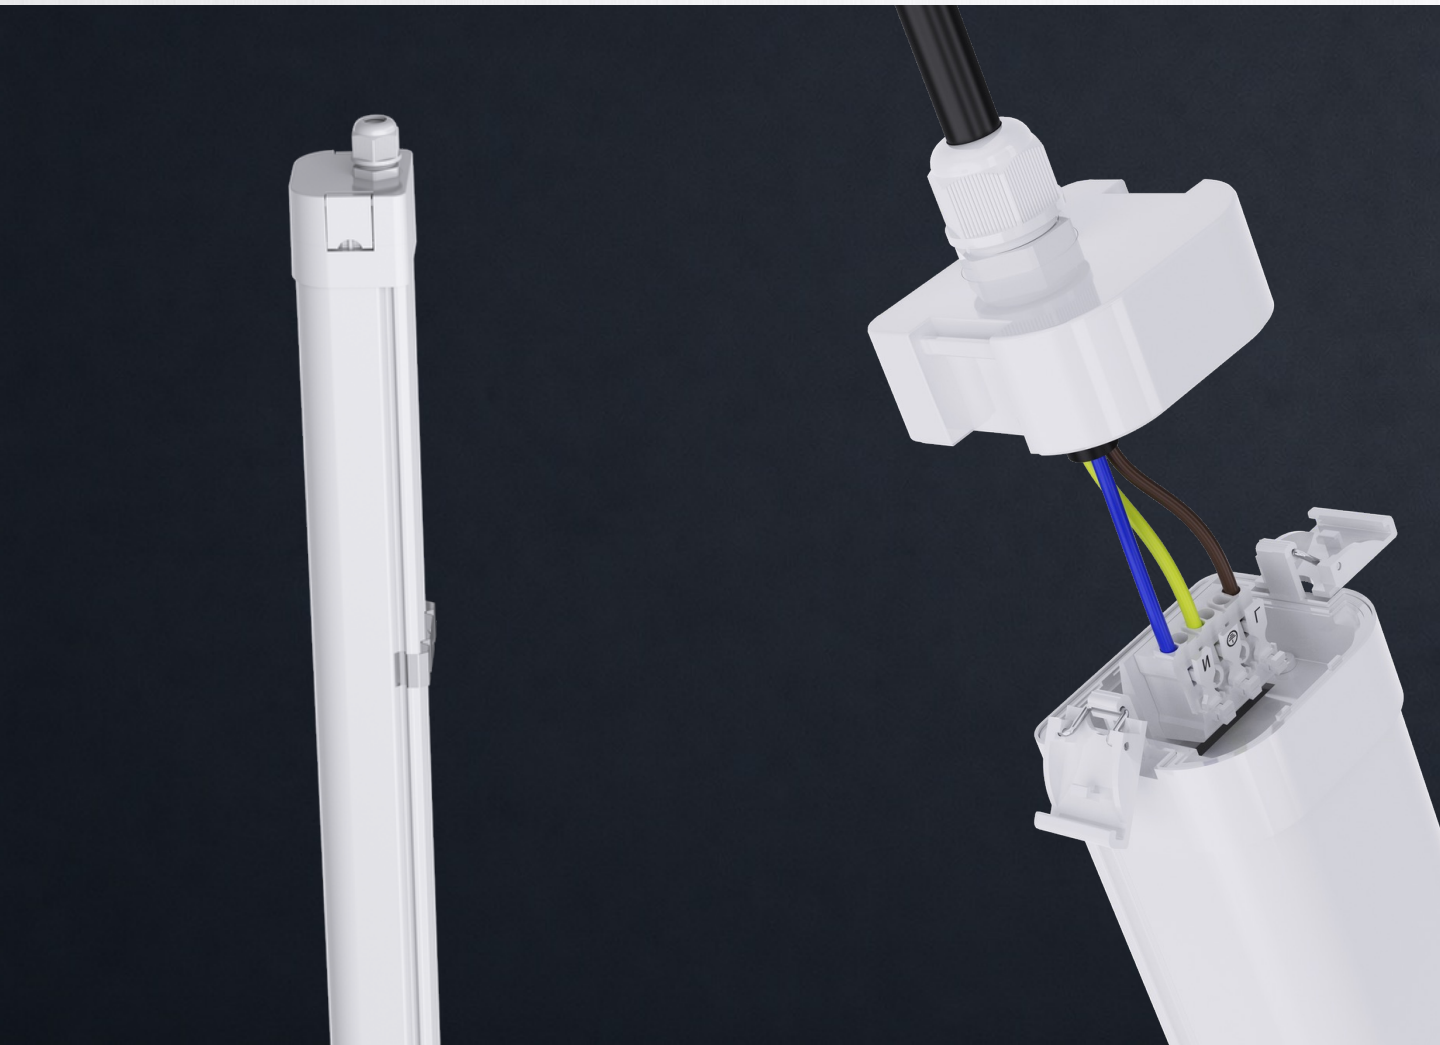




GOMEISA 60-4K

GM-GOME-60W-4KD120

Power: 60W
CCT: 4000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 8400
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux



Drawing Gomeisa 20-5k



	L	W	H
20W	659mm	74mm	64mm
30W	1221mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA 20-5K

GM-GOME-20W-5KD120

Power: 20W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 2800
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux





Drawing Gomeisa 30-5k

	L	W	H
20W	659mm	74mm	64mm
30W	1221mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA 30-5K

GM-GOME-30W-5KD120

Power: 30W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 4200
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

GMTECNOLED





Drawing Gomeisa 40-5k

	L	W	H
20W	659mm	74mm	64mm
30W	1221mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA 40-5K

GM-GOME-40W-5KD120

Power: 40W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 5600
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux


GMTECNOLED

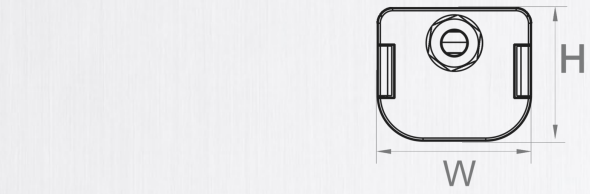

Drawing Gomeisa 60-5k



	L	W	H
20W	659mm	74mm	64mm
30W	1221mm	74mm	64mm
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

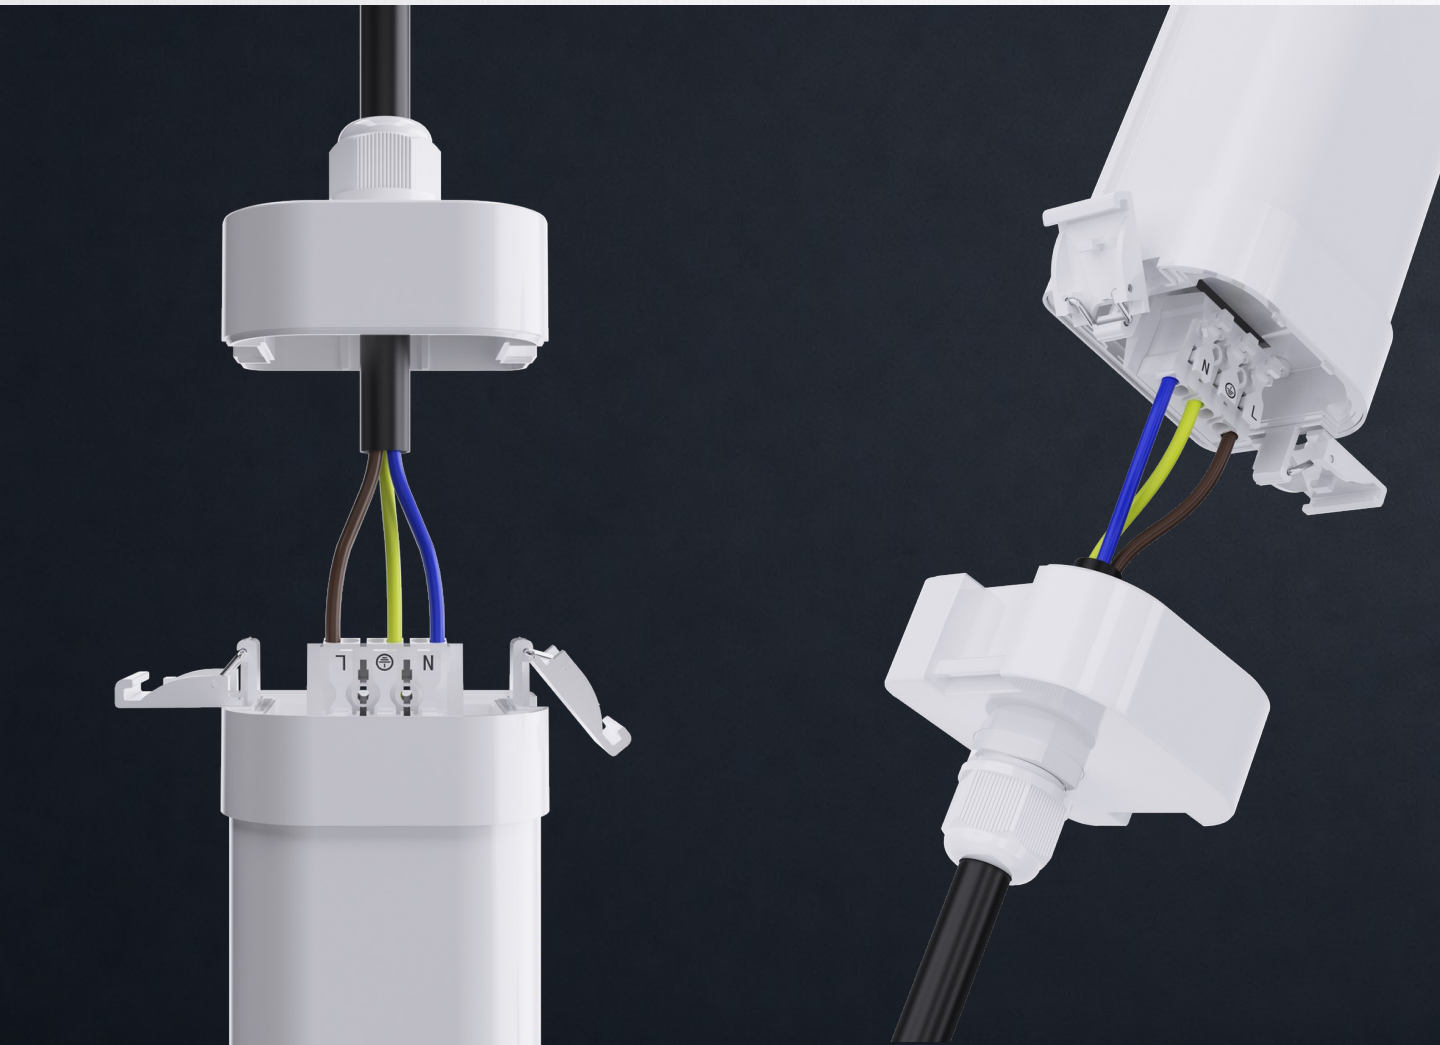




GOMEISA 60-5K

GM-GOME-60W-5KD120

Power: 60W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 8400
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

GMTECNOLED

Drawing GOMEISA AD40-4K

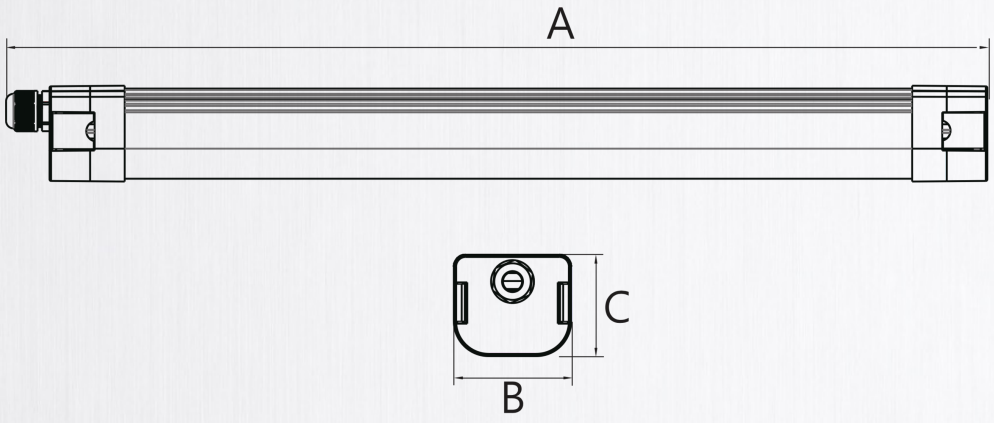

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA AD40-4K

GM-GOME-40W-4KD120-AD

Power: 24W/30W/35W/40W
CCT: 4000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 6000
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Inventronics
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Bridgelux

Drawing GOMEISA AD60-4K

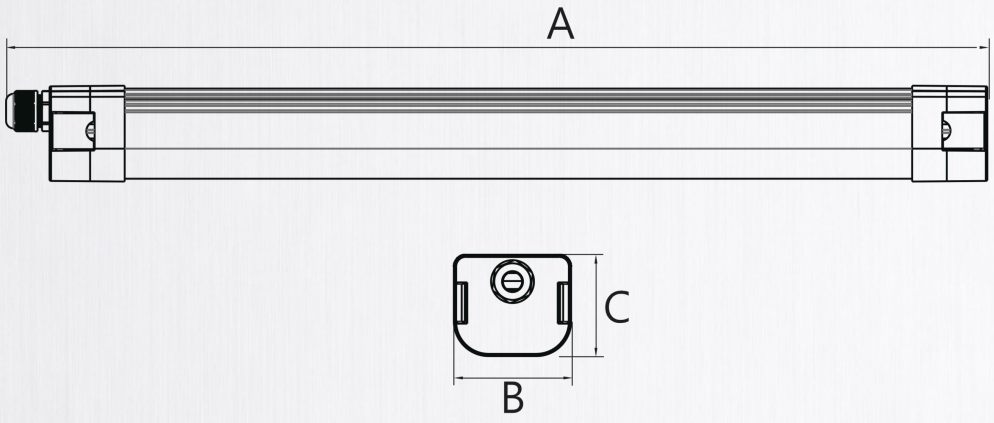

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm







GOMEISA AD60-4K

GM-GOME-60W-4KD120-AD

Power: 34W/42W/50W/60W

CCT: 4000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)

Lumen: 9000

Optical option: 120°

Dimmerable: NO (optional: DALI)

CRI: >80

SDCM: ≤5

Power factor: >0.95

Thermal conductivity: 226 W/m*K

TM21: L70B10>102000hr

Degree of protection: IP65

Impact protection: IK10

Operating temperature: -30°C - +45°C

Photobiological Risk: RG0/1

Ceiling mounted


Driver: Inventronics

Voltage - Frequency: 220-240V - 50/60Hz

Surge protection: 1kV Differential Mode, 2kV Common Mode

LED: Bridgelux

Drawing GOMEISA AD40-5K

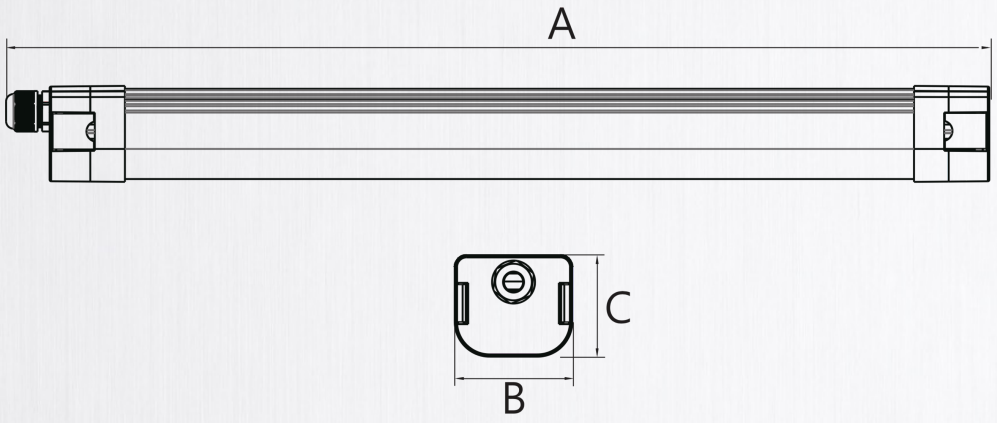

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA AD40-5K

GM-GOME-40W-5KD120-AD


Power: 24W/30W/35W/40W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 6000
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Inventronics
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Bridgelux

Drawing GOMEISA AD60-5K

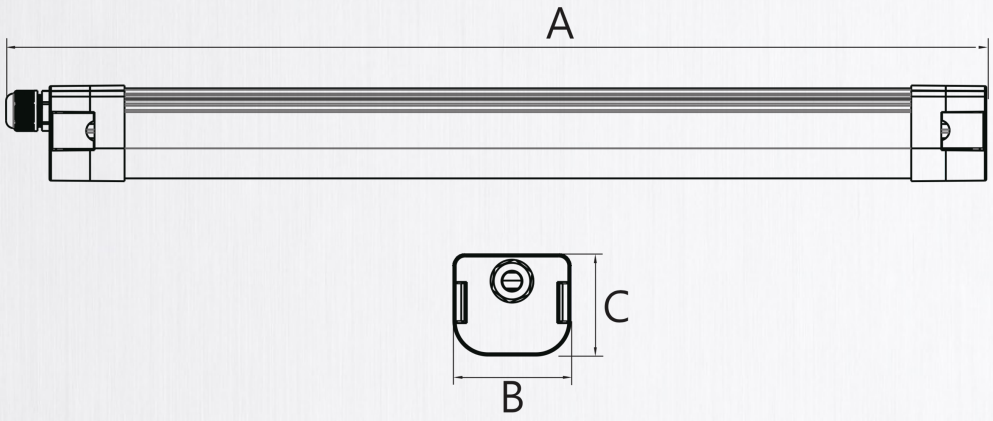

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm



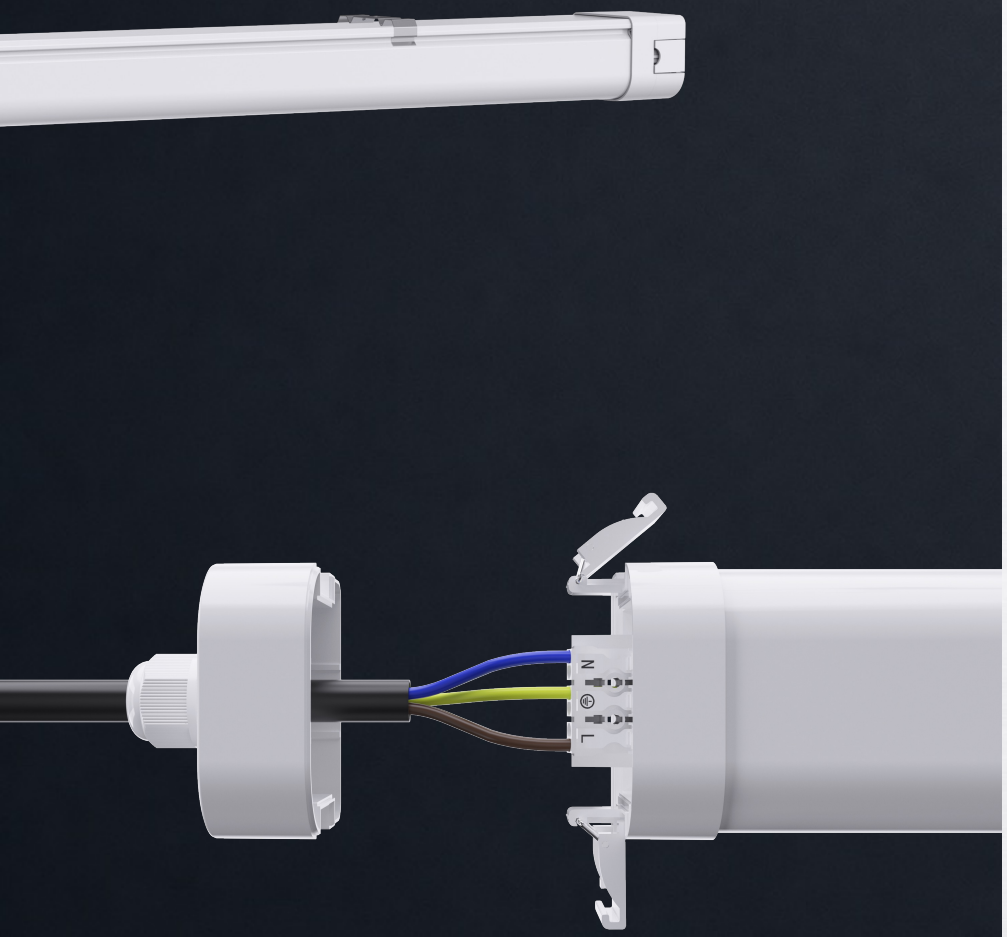


GOMEISA AD60-5K


GM-GOME-60W-5KD120-AD

Power: 34W/42W/50W/60W
CCT: 5000K (optional: DIP switch CCT adjustable, 3000K-4000K-5000K)
Lumen: 9000
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Inventronics
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Bridgelux

Drawing Gomeisa ad40-cctad

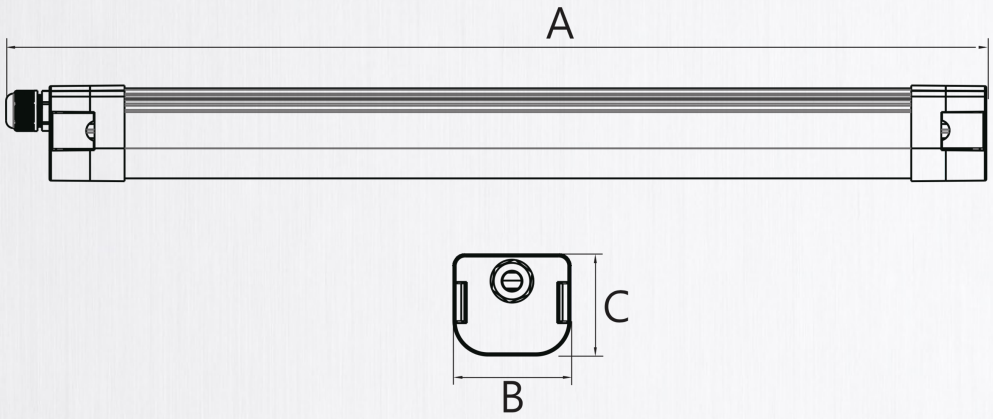

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

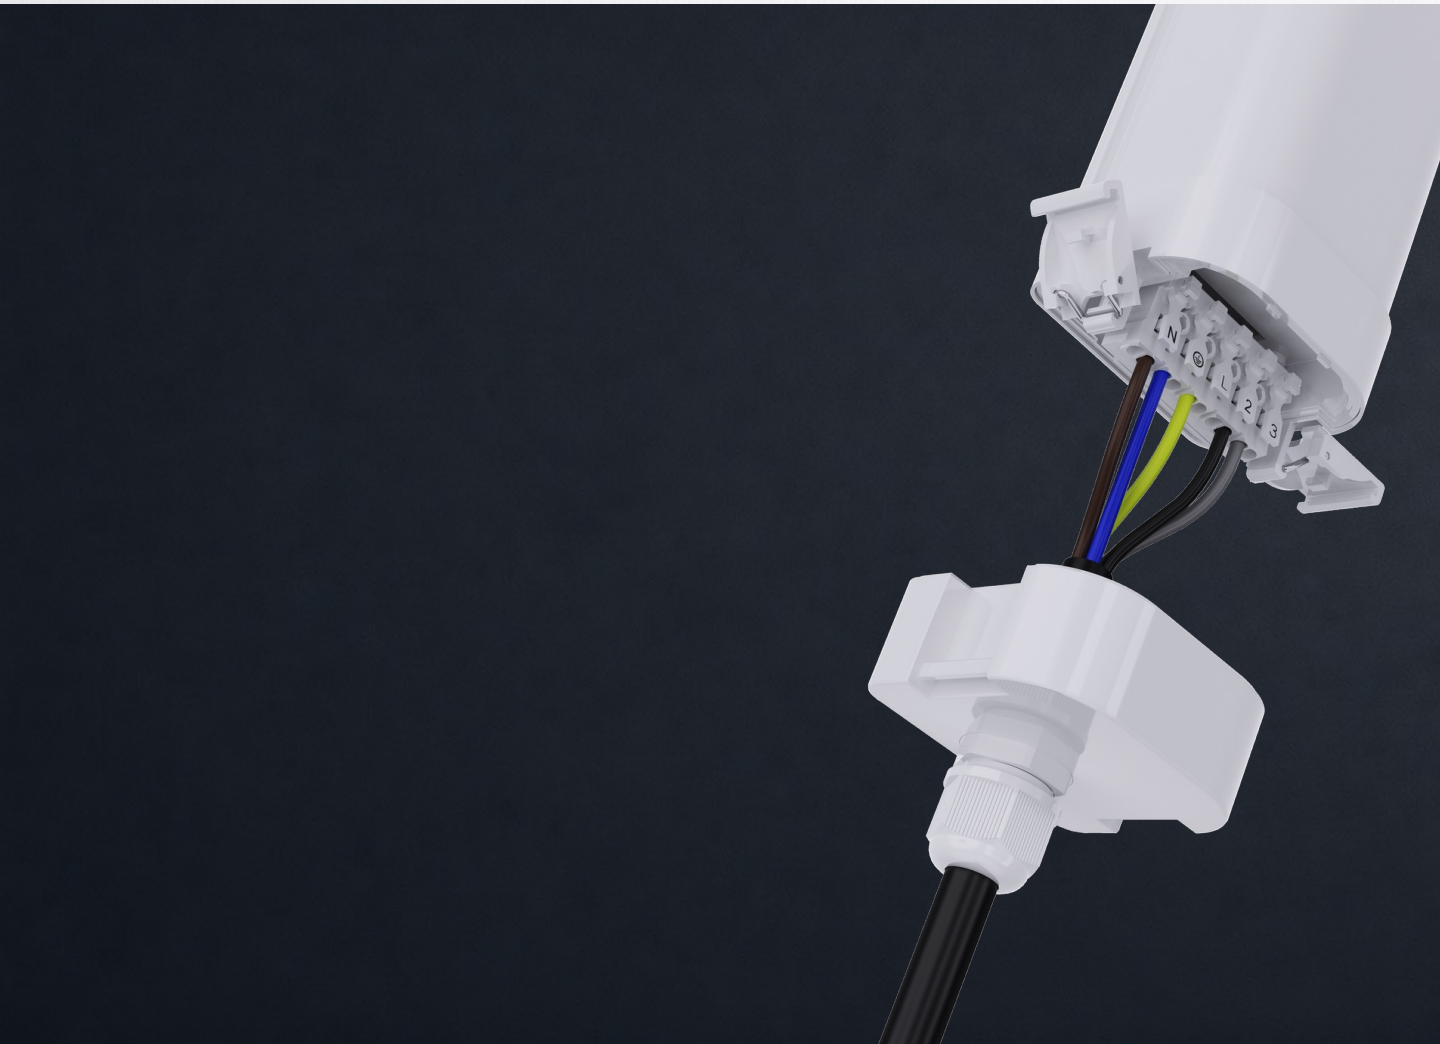




GOMEISA AD40-CCTAD

GM-GOME-40W-TADD120-AD

Power: 23W/28W/34W/40W
CCT: 3000K, 4000K, 5000K
Lumen: 5600 (3000K, 140lm/W), 6400 (4000K, 160lm/W), 6000 (5000K, 150lm/W)
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

Drawing Gomeisa ad60-cctad

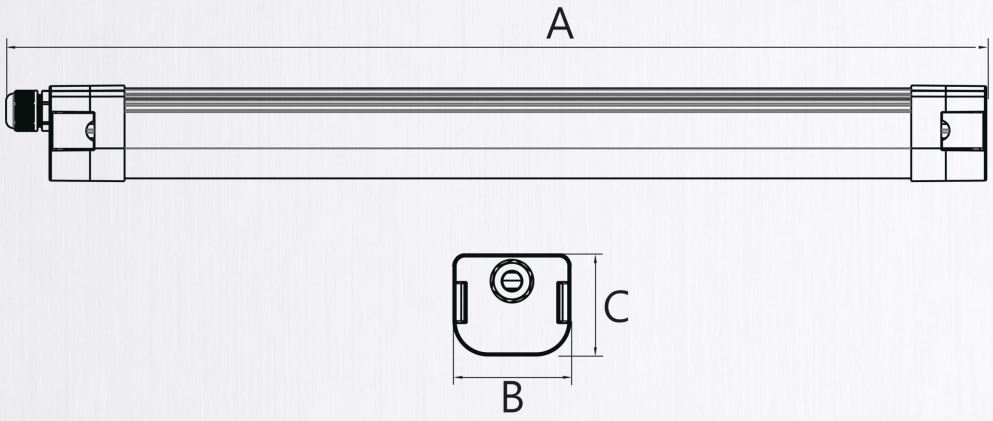

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm






GOMEISA AD60-CCTAD

GM-GOME-60W-TADD120-AD


Power: 33W/40W/50W/60W
CCT: 3000K, 4000K, 5000K
Lumen: 8400 (3000K, 140lm/W), 9600 (4000K, 160lm/W), 9000 (5000K, 150lm/W)
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

Drawing Gomeisa pro ad40-cctad

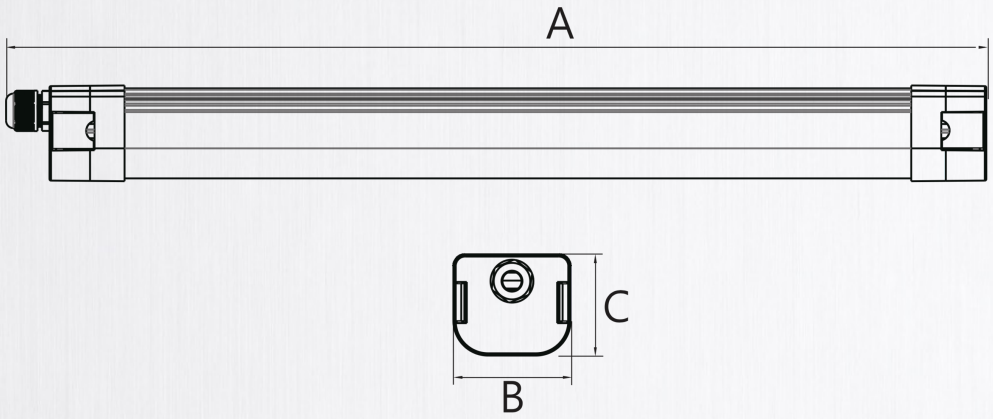

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm



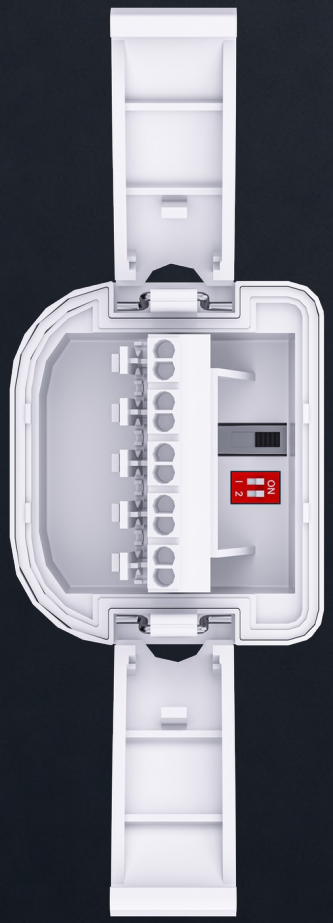


GOMEISA PRO AD40-CCTAD


GM-GOME-PRO-40W-TADD120-AD


Power: 23W/28W/34W/40W
CCT: 3000K, 4000K, 5000K
Lumen: 6800 (5000K, 170lm/W), 6800 (4000K, 170lm/W), 6400 (3000K, 160lm/W)
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode

Drawing Gomeisa pro ad60-cctad

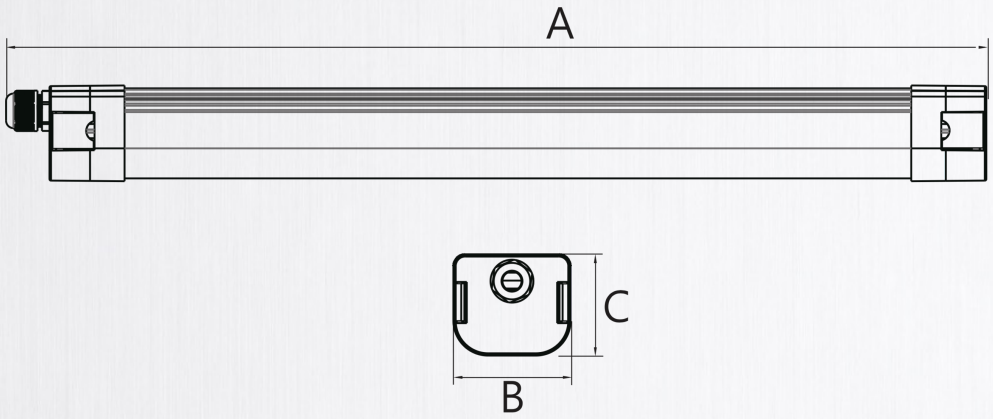

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

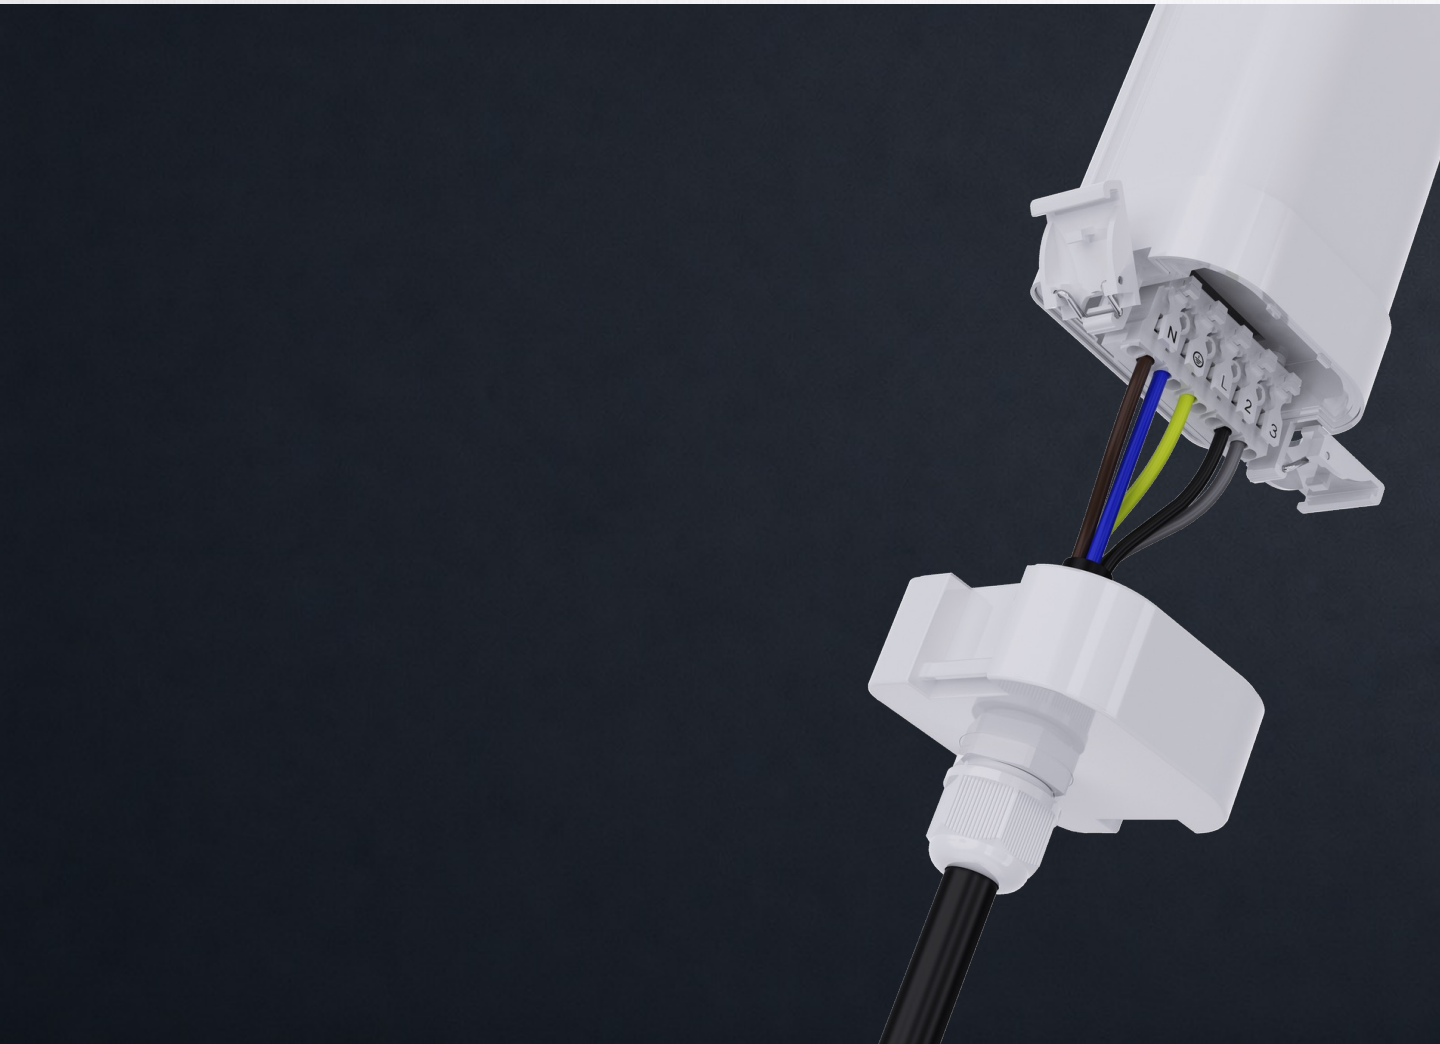

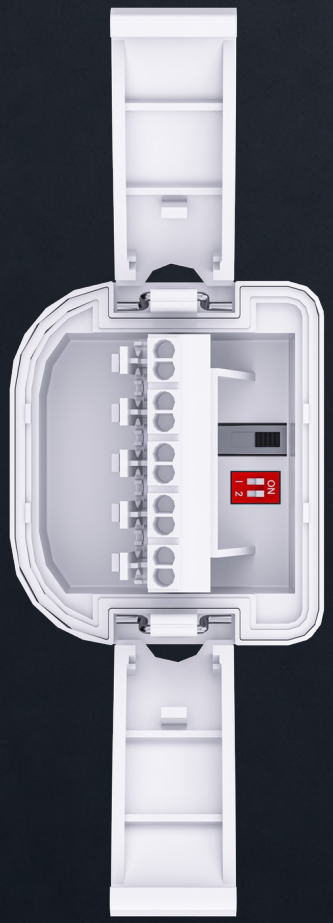


GOMEISA PRO AD60-CCTAD


GM-GOME-PRO-60W-TADD120-AD


Power: 33W/40W/50W/60W
CCT: 3000K, 4000K, 5000K
Lumen: 10200 (5000K, 170lm/W), 10200 (4000K, 170lm/W), 9600 (3000K, 160lm/W)
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode

Drawing Gomeisa dim40-4k

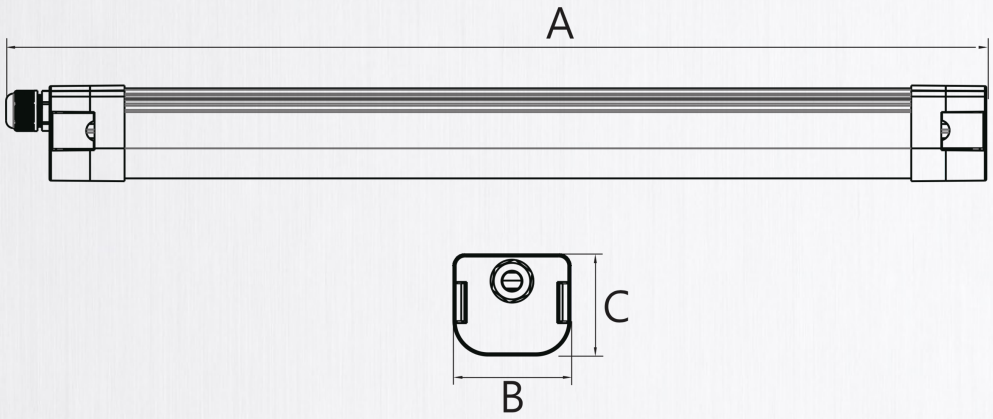

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

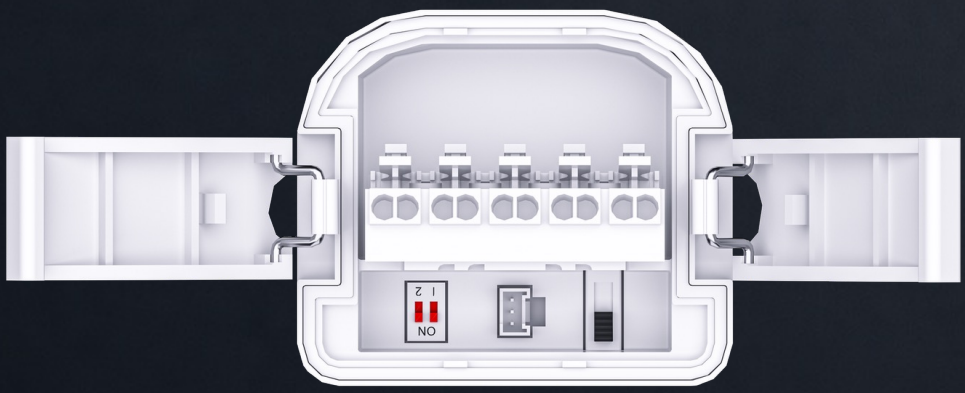

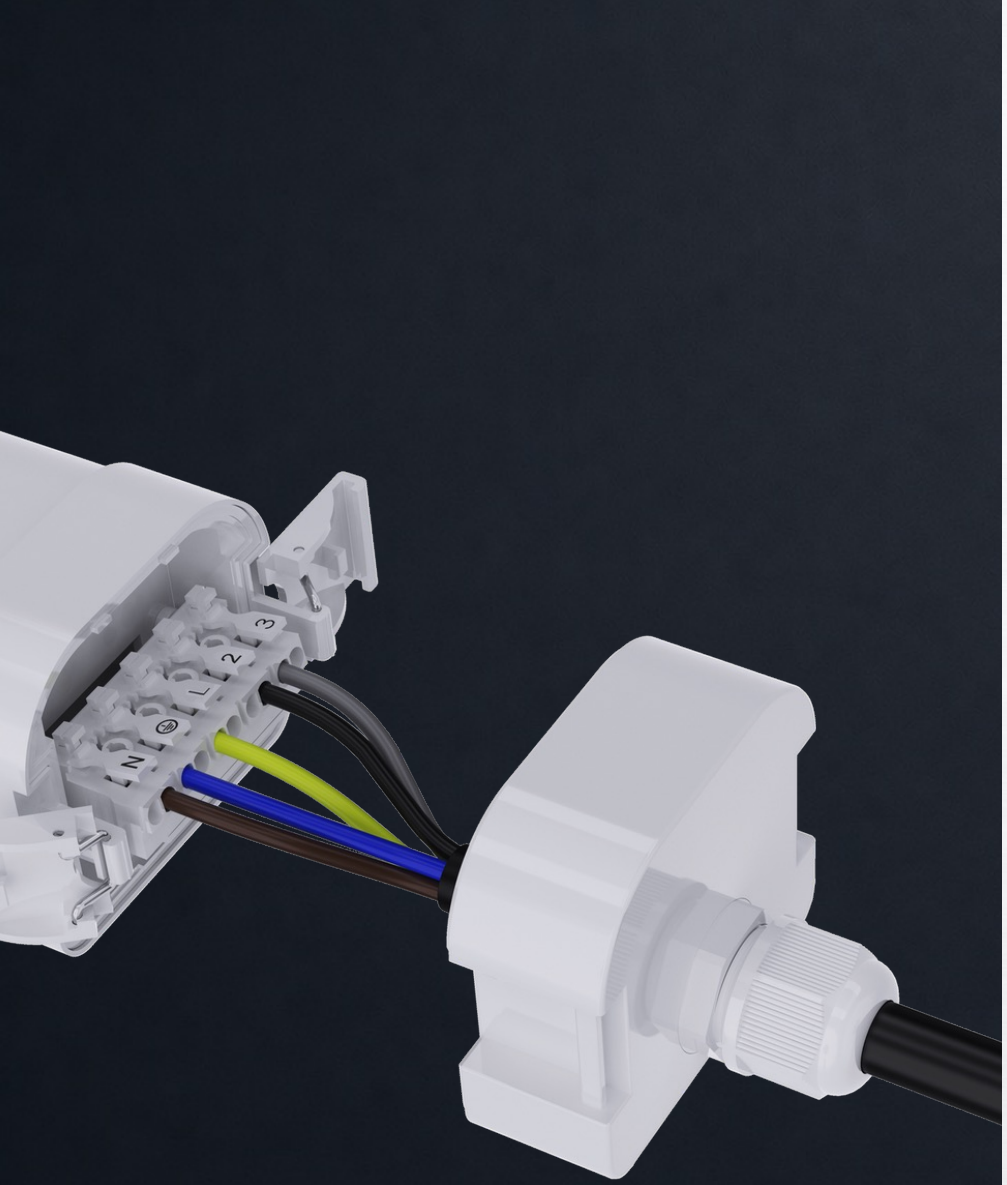


GOMEISA
DIM40-4K

GM-GOME-40W-4KD120-DL


Power: 40W
CCT: 4000K
Lumen: 6800
Optical option: 120°
Dimmerable: DALI
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

GMTECNOLED

Drawing Gomeisa dim60-4k

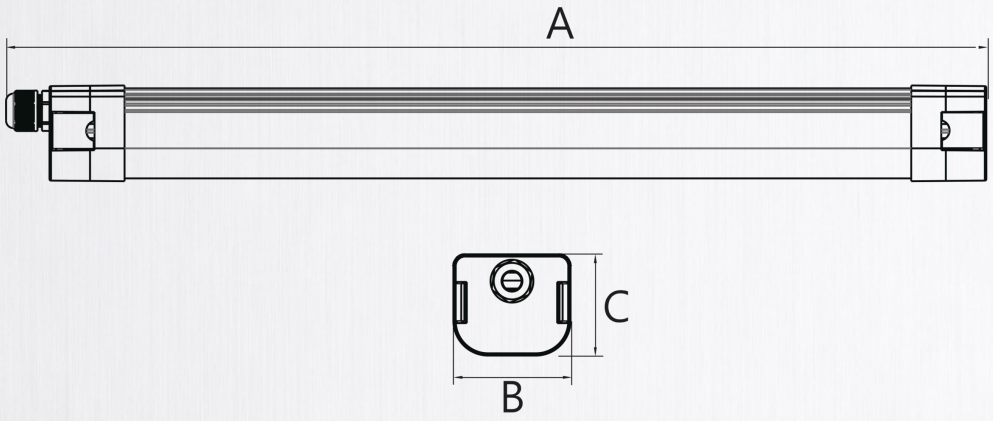

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm

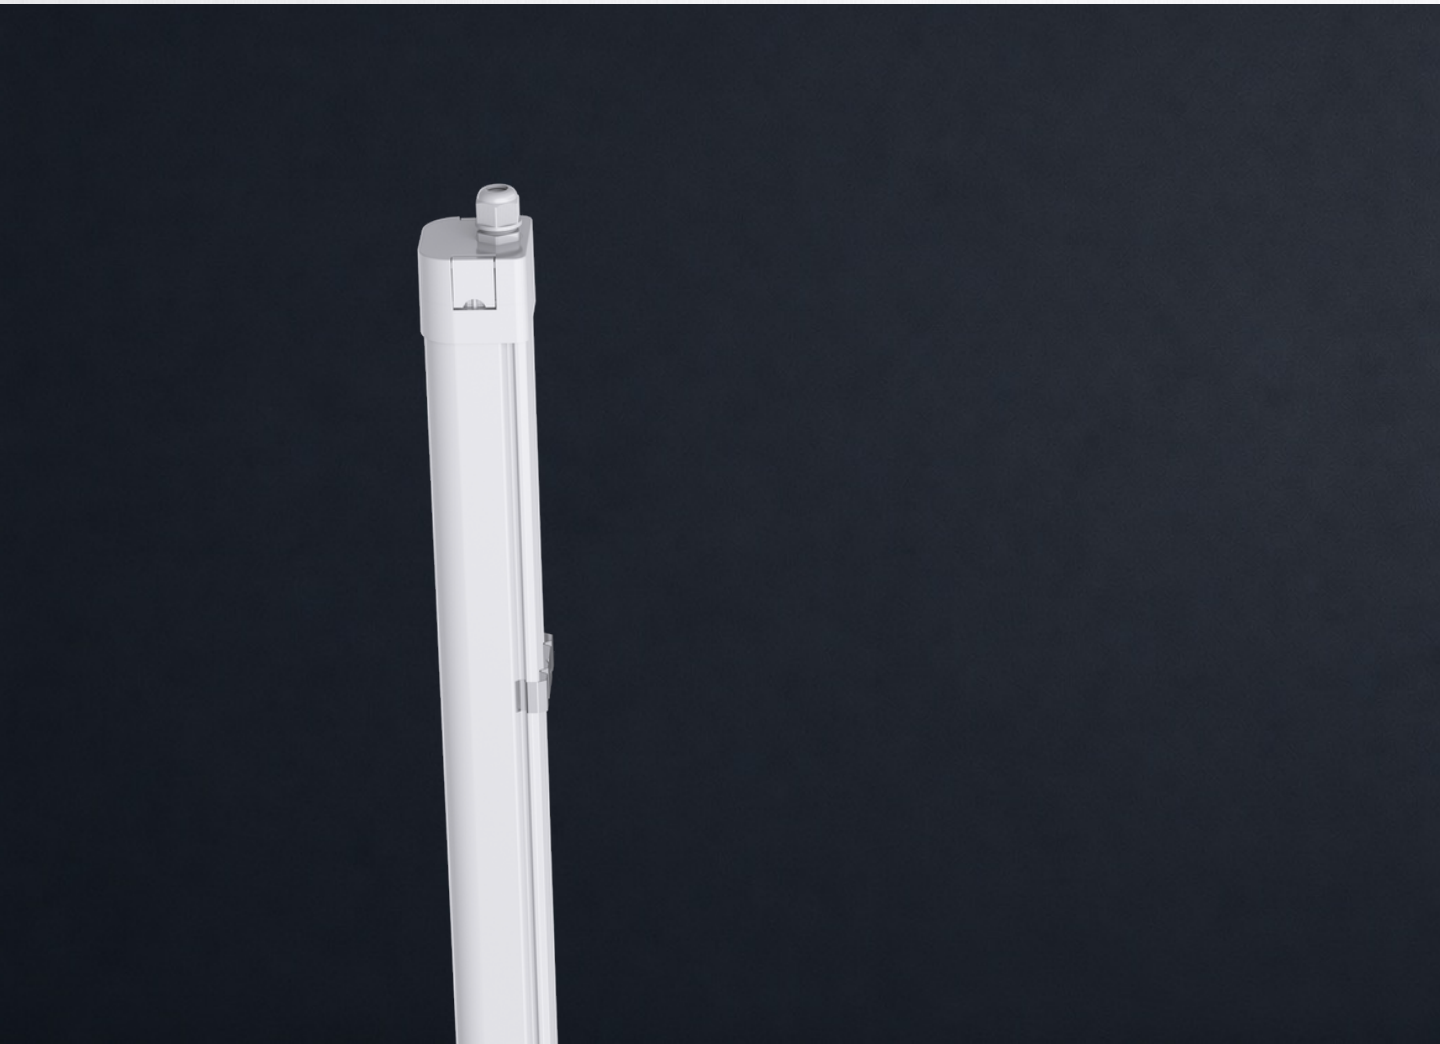




GOMEISA DIM60-4K

GM-GOME-60W-4KD120-DL

Power: 60W
CCT: 4000K
Lumen: 10200
Optical option: 120°
Dimmerable: DALI
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
Led: Bridgelux

Drawing Gomeisa sens 40-4k

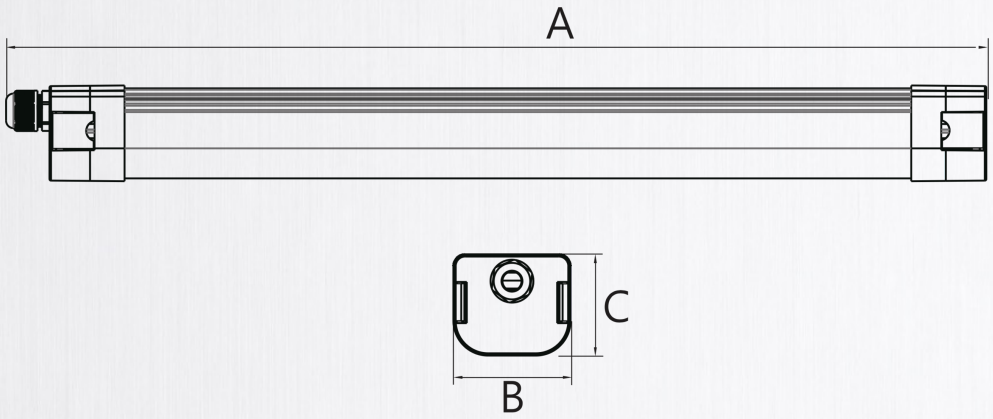

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm



GMTECNOLED


GOMEISA
SENS 40-4K

GM-GOME-40W-4KD120-SNS

Power: 40W
CCT: 4000K
Lumen: 5600
Optical option: 120°
Dimmerable: NO
CRI: >80
SDCM: <6
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L80B10>50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Ceiling mounted
Description: With microwave sensor and light sensor
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 2kV
Led: Bridgelux




Drawing Gomeisa sens 60-4k

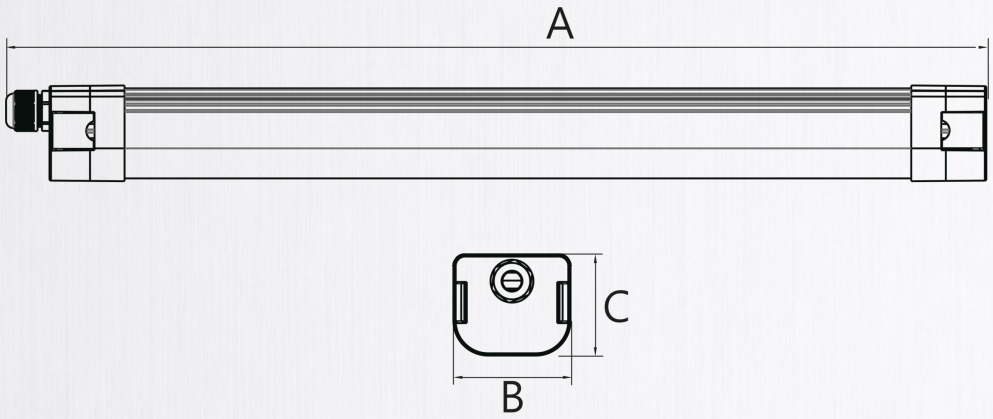

	A	B	C
40W	1221mm	74mm	64mm
60W	1502mm	74mm	64mm



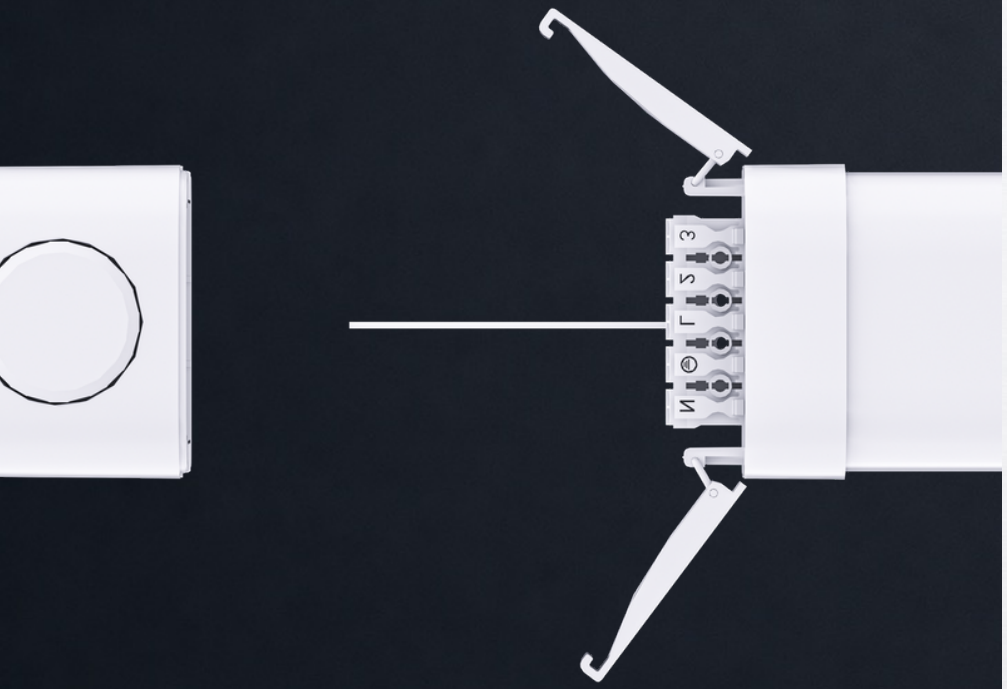


GOMEISA SENS 60-4K

GM-GOME-60W-4KD120-SNS

Power: 60W
CCT: 4000K
Lumen: 8400
Optical option: 120°
Dimmerable: NO
CRI: >80
SDCM: <6
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L80B10>50000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Ceiling mounted
Description: With microwave sensor and light sensor
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 2kV
Led: Bridgelux

Drawing Rigel 40-4k

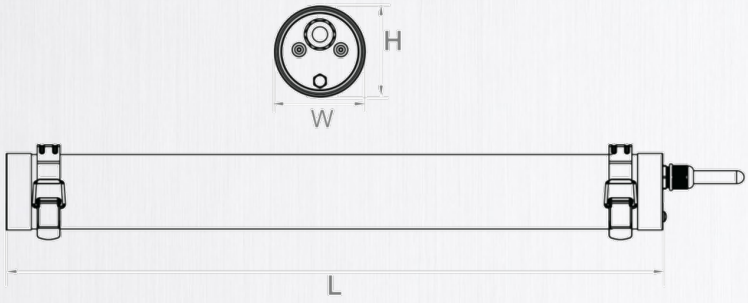

	L	W	H
24W	600mm	81mm	81mm
40W	1200mm	81mm	81mm
60W	1500mm	81mm	81mm






RIGEL 40-4K

GM-RIGE-40W-4KD120

Power: 40W
CCT: 4000K
Lumen: 6000
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP69K
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: Waterproof
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode

GMTECNOLED

Drawing Rigel 60-4k

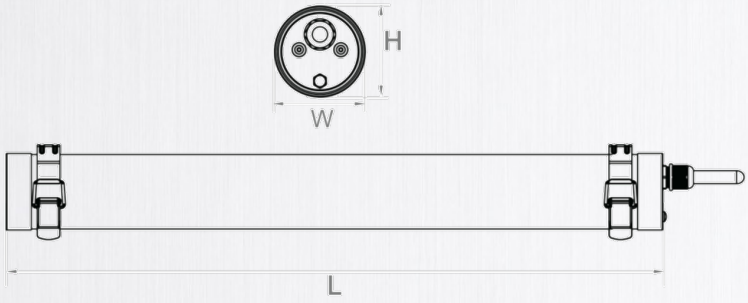

	L	W	H
24W	600mm	81mm	81mm
40W	1200mm	81mm	81mm
60W	1500mm	81mm	81mm






RIGEL 60-4K

GM-RIGE-60W-4KD120

Power: 60W
CCT: 4000K
Lumen: 9000
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP69K
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Ceiling mounted
Description: Waterproof
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode

Drawing Alioth 36-4k

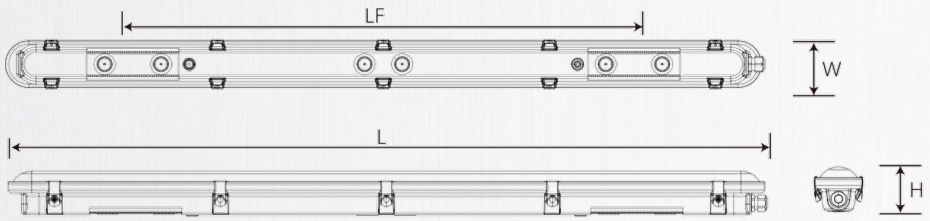

	L	LF	W	H
36W	1207mm	800mm	75mm	70mm
55W	1507mm	1060mm	75mm	70mm






ALIOTH 36-4K

GM-ALIO-36W-4KTP12

Power: 36W
CCT: 4000K
Lumen: 5400
Optical option: TP-12-32B3
Dimmerable: NO
CRI: >80
SDCM: ≤3
Power factor: >0.9
TM21: L70B50>50000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
UGR: <25
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Led: SMD

GMTECNOLED

Drawing Alioth 55-4k

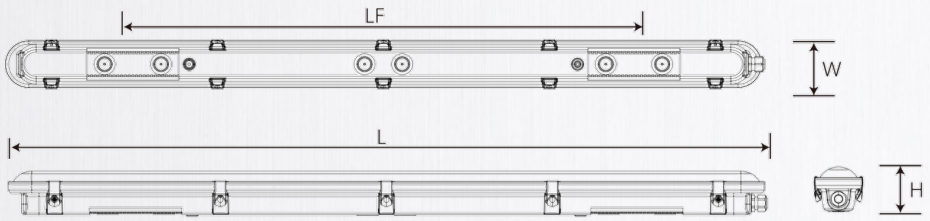

	L	LF	W	H
36W	1207mm	800mm	75mm	70mm
55W	1507mm	1060mm	75mm	70mm






ALIOTH 55-4K


GM-ALIO-55W-4KTP12

Power: 55W
CCT: 4000K
Lumen: 8250
Optical option: TP-12-32B3
Dimmerable: NO
CRI: >80
SDCM: ≤3
Power factor: >0.9
TM21: L70B50>50000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Ceiling mounted
UGR: <25
Driver: Philips
Voltage - Frequency: 220-240V - 50/60Hz
Led: SMD

GMTECNOLED

Drawing REGULUS AD75

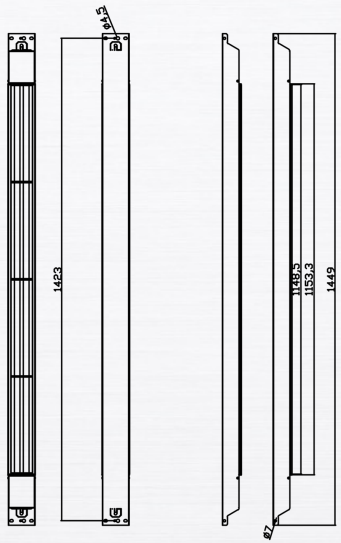

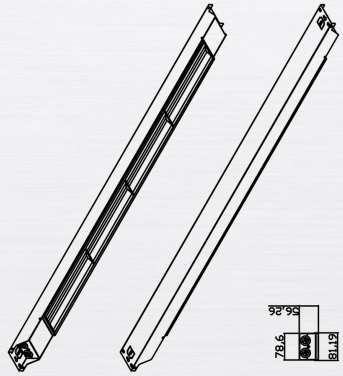



GMTECNOLED





REGULUS AD75

GM-REGU-75W-4KD90-AD

Power: 14-75W
CCT: 4000K
Lumen: 15000
Optical option: 90*110° (optional: 30*90°/60*110°/120*110°/2T25°/T25°)
Dimmerable: DALI
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K (AL6063), 50 W/m*K (medium carbon steel)
TM21: L70B10>102000hr
Degree of protection: IP44
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Lumileds

Drawing REGULUS AD120

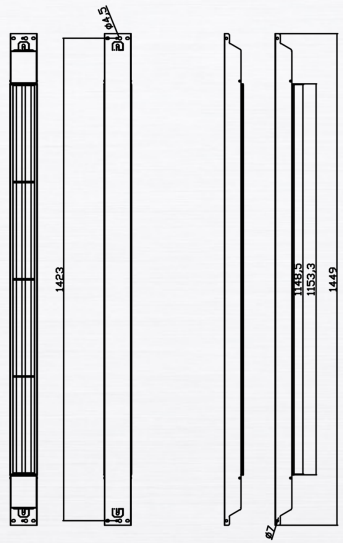

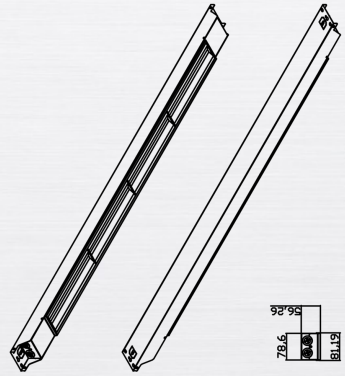



GMTECNOLED




REGULUS AD120

GM-REGU-120W-4KD90-AD

Power: 50-120W
CCT: 4000K
Lumen: 21600
Optical option: 90*110° (optional: 30*90°/60*110°/120*110°/2T25°/T25°)
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K (AL6063), 50 W/m*K (medium carbon steel)
TM21: L70B10>102000hr
Degree of protection: IP44
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Lumileds

Drawing Alphard sens 150-3k

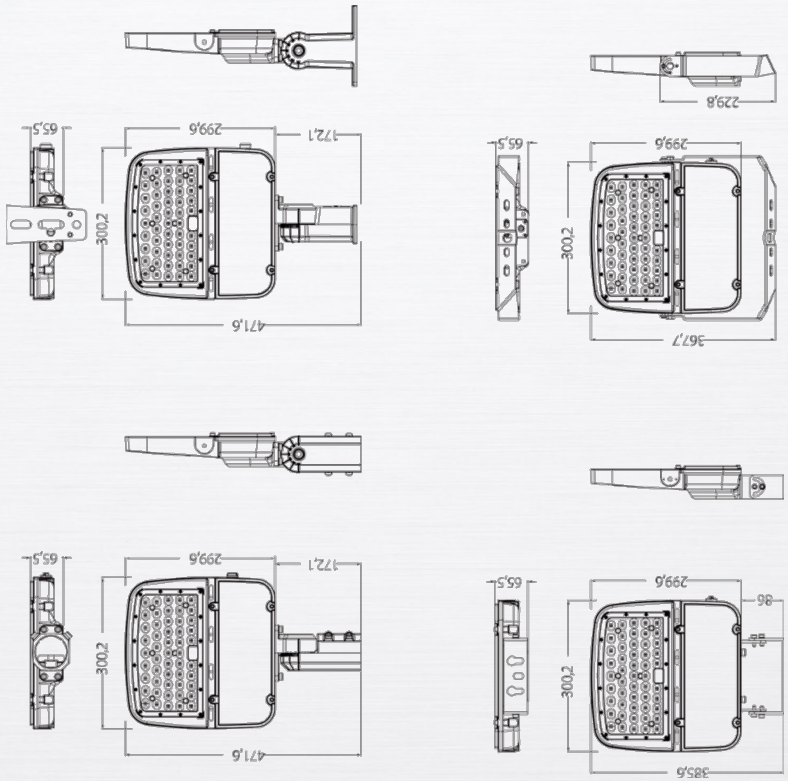








ALPHARD
SENS 150-3K

GM-ALPH-150W-3KTP3-SNS

Power: 150W
CCT: 3000K
Lumen: 27000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 150-4k

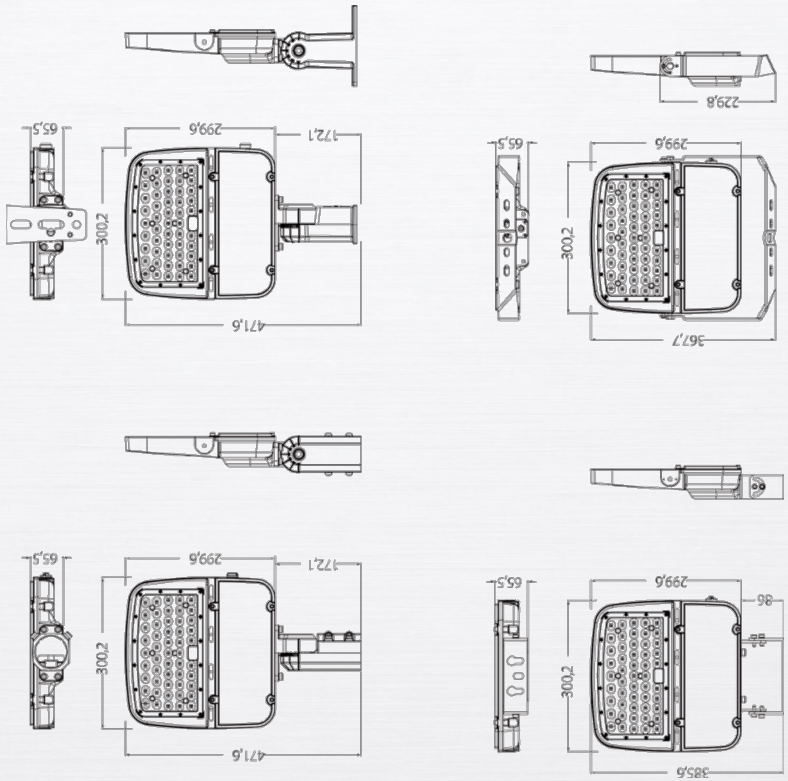



GMTECNOLED





ALPHARD
SENS 150-4K

GM-ALPH-150W-4KTP3-SNS

Power: 150W
CCT: 4000K
Lumen: 27000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 150-5k

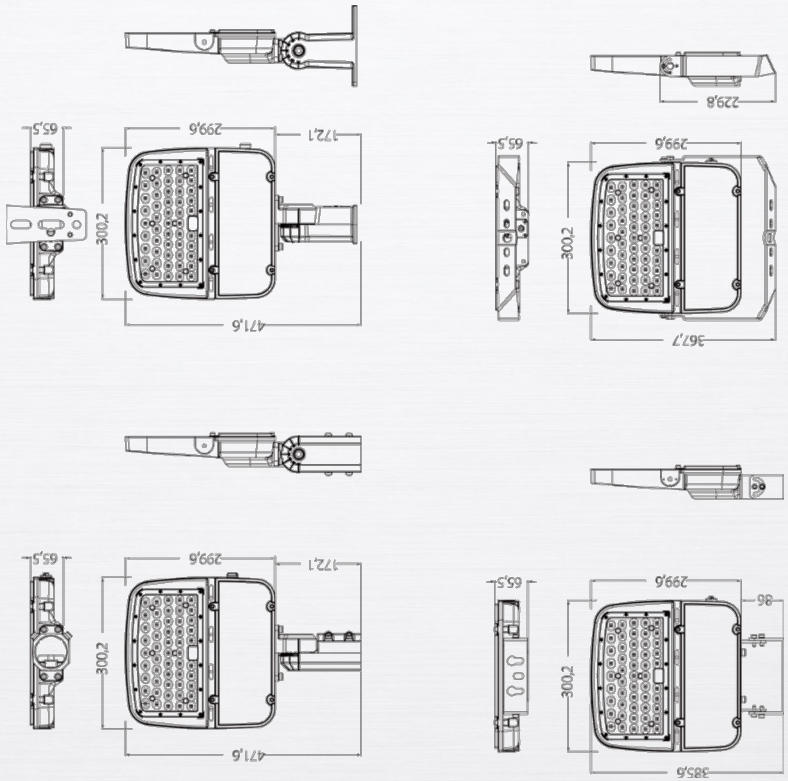

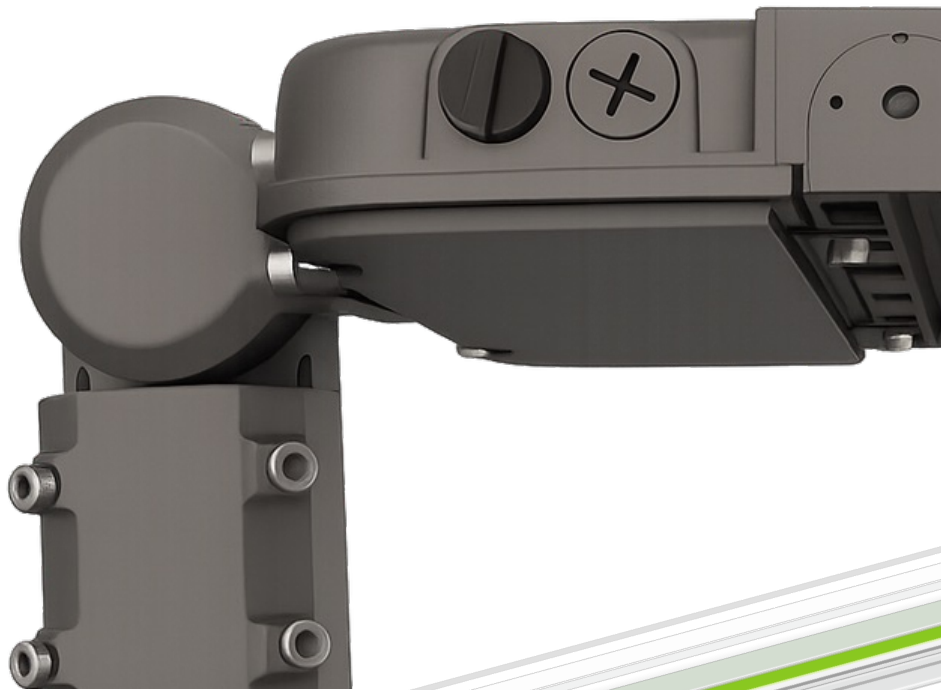

GMTECNOLED




ALPHARD SENS 150-5K

GM-ALPH-150W-5KTP3-SNS

Power: 150W
CCT: 5000K
Lumen: 27000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 200-3k

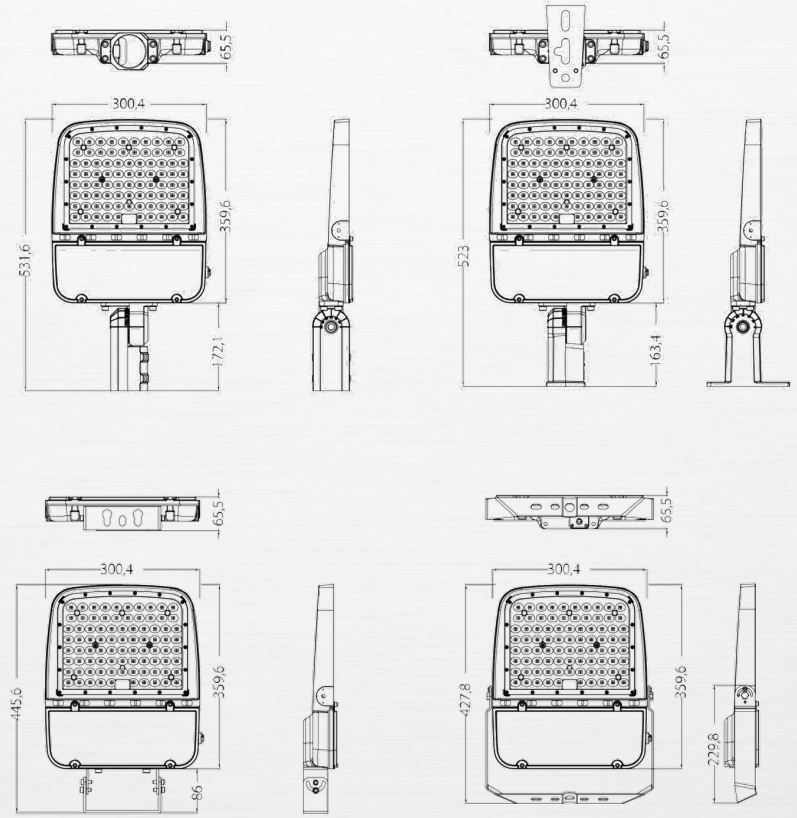





GMTECNOLED


ALPHARD SENS 200-3K



GM-ALPH-200W-3KTP3-SNS

Power: 200W
CCT: 3000K
Lumen: 36000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 200-4k

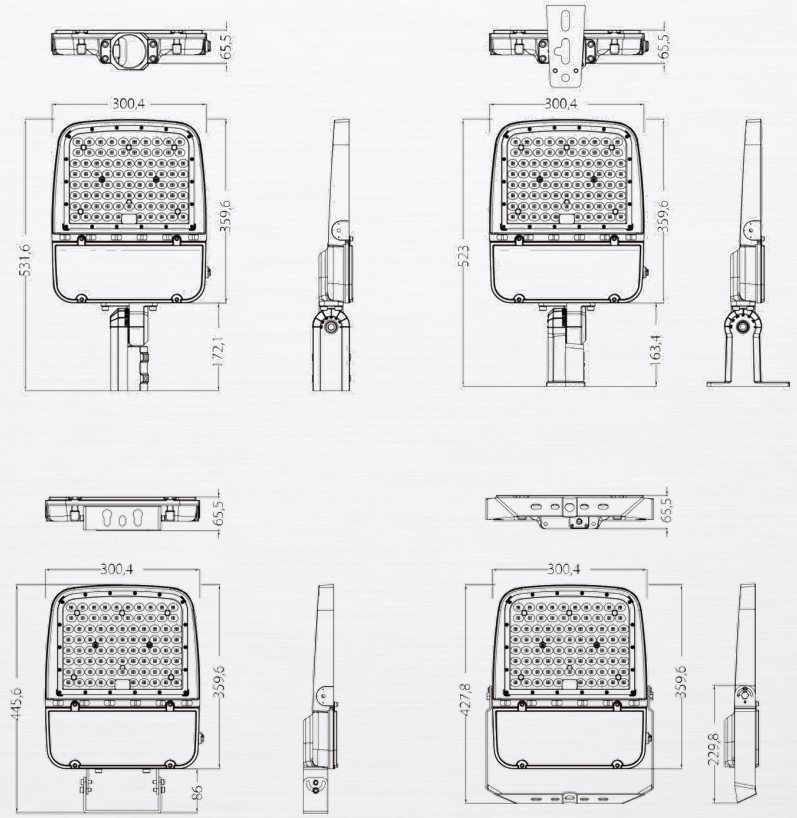








ALPHARD SENS 200-4K

GM-ALPH-200W-4KTP3-SNS

Power: 200W
CCT: 4000K
Lumen: 36000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 200-5k

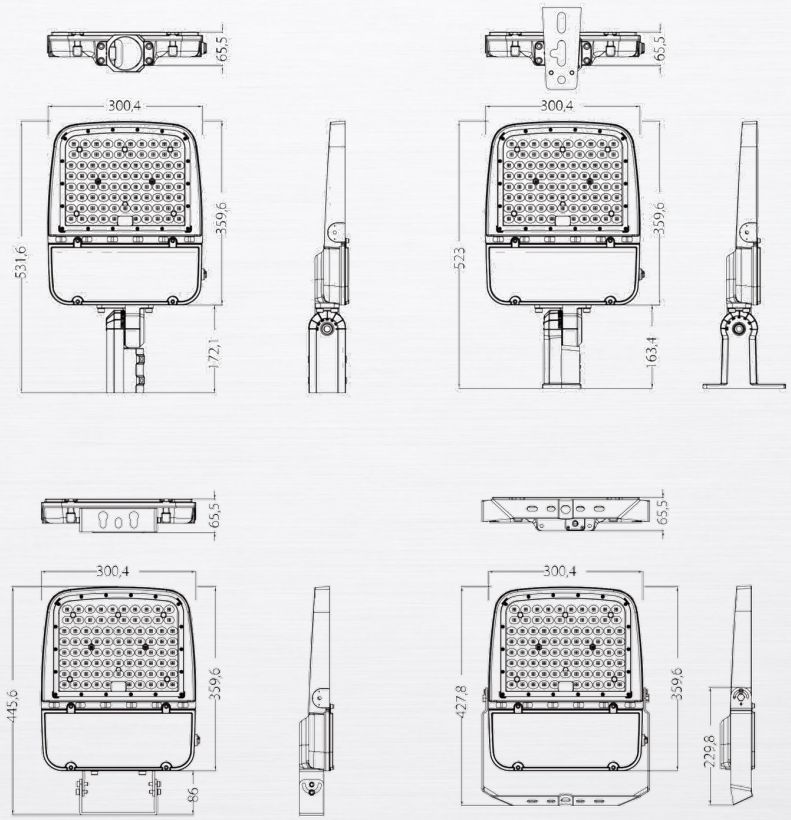



GMTECNOLED


ALPHARD SENS 200-5K

GM-ALPH-200W-5KTP3-SNS

Power: 200W
CCT: 5000K
Lumen: 36000
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030



Drawing Alphard sens 240-3k

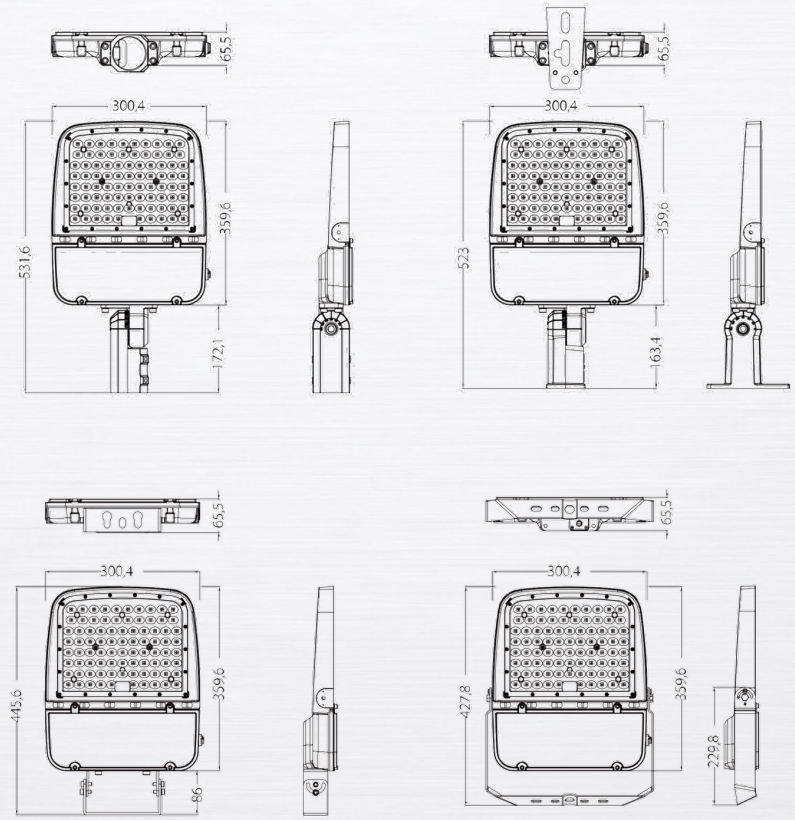



GMTECNOLED




ALPHARD SENS 240-3K

GM-ALPH-240W-3KTP3-SNS

Power: 240W
CCT: 3000K
Lumen: 43200
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 240-4k

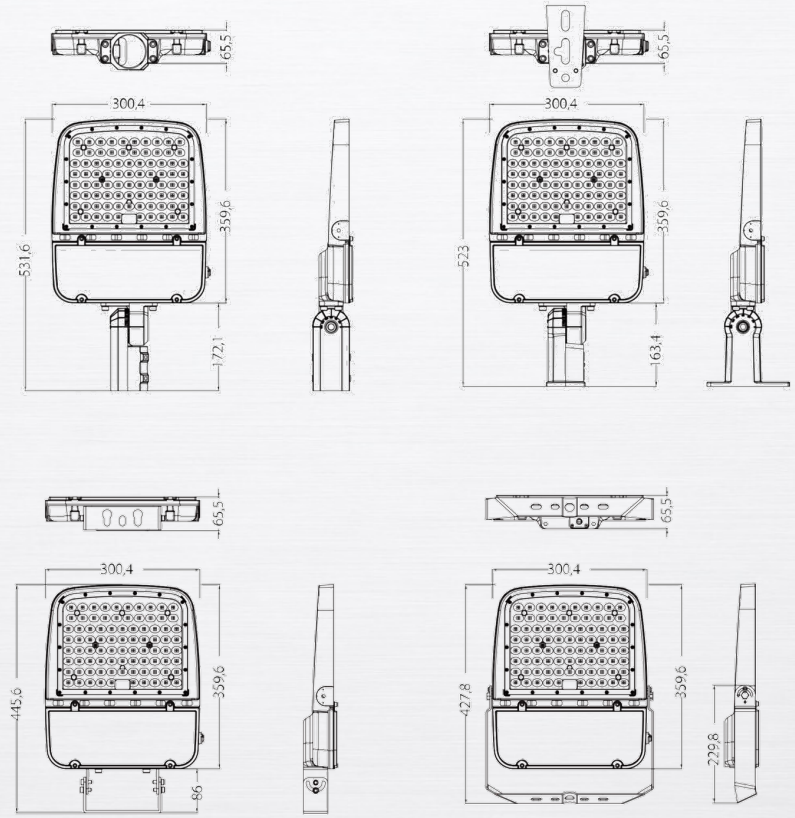








ALPHARD SENS 240-4K

GM-ALPH-240W-4KTP3-SNS

Power: 240W
CCT: 4000K
Lumen: 43200
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard sens 240-5k

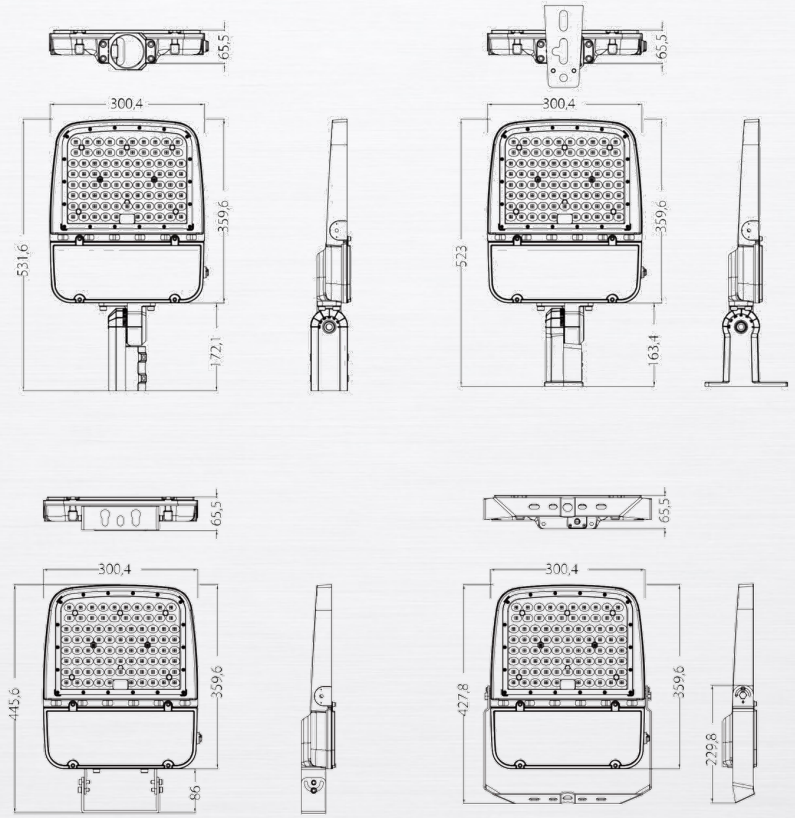

DIMMING FUNCTION

Plug-in Sensor (Microwave Sensor + Daylight Sensor)

The integrated motion sensor allows advanced 3-step lighting control, specifically designed for environments requiring gradual light dimming before complete switch-off.

MAIN FUNCTIONS

The sensor manages lighting according to occupancy detection and ambient daylight conditions, providing:

- 100% light output or adjustable dimming levels;
- Automatic switch-on when natural daylight is insufficient;
- Automatic switch-off when ambient daylight is sufficient.



GMTECNOLED

ALPHARD SENS 240-5K

GM-ALPH-240W-5KTP3-SNS

Power: 240W
CCT: 5000K
Lumen: 43200
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Description: With microwave sensor, daylight sensor (optional: motion sensor)
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

ADJUSTABLE TIME SETTINGS

The sensor features two programmable delay periods:

- **Hold Time:** adjustable period before entering stand-by mode after no movement is detected;
- **Stand-by Period:** programmable duration from 0 seconds to unlimited time, after which the light switches off automatically.

LIGHT DETECTION MODES

Selectable operating modes include:

- **Disabled Mode:** light switches on immediately upon motion detection;
- **Photo Control Mode (Photo_con):** light turns on at 100% when the preset daylight threshold is reached (100/200/300 lux, etc.).

DETECTION AREA SENSITIVITY


The microwave sensor detection range can be adjusted according to installation requirements to avoid interference with adjacent operating areas.

- Maximum detection diameter: 9 meters;
- Adjustable for smaller detection zones.

REMOTE PROGRAMMING

The microwave sensor can be programmed remotely via dedicated remote control from a distance of up to 12m.

Drawing Alphard ad150-3k

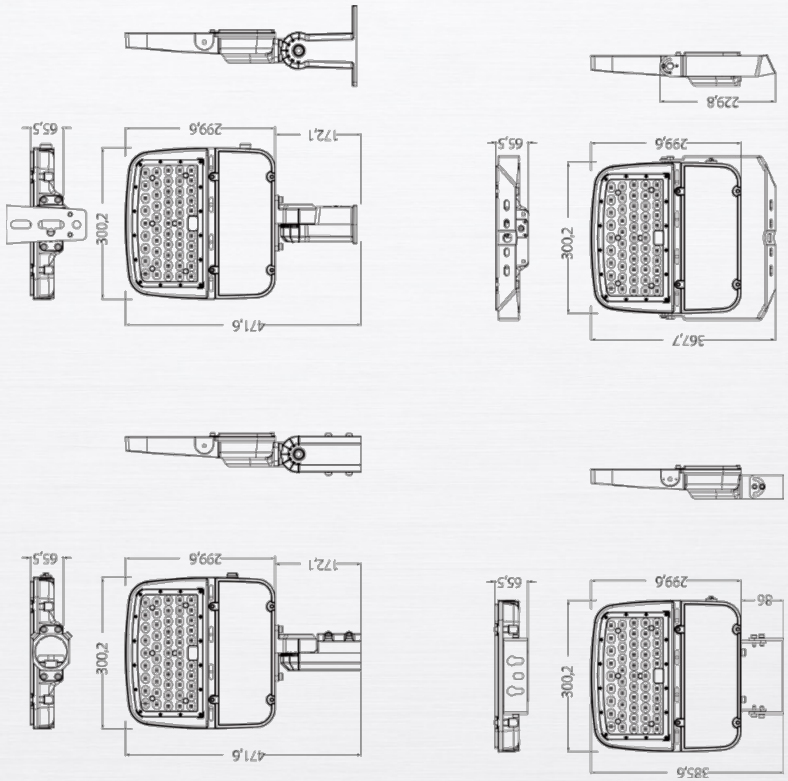






ALPHARD
AD150-3K

GM-ALPH-150W-3KTP3-AD

Power: 150W/100W/75W
CCT: 3000K
Lumen: 180lm/W
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard ad150-4k

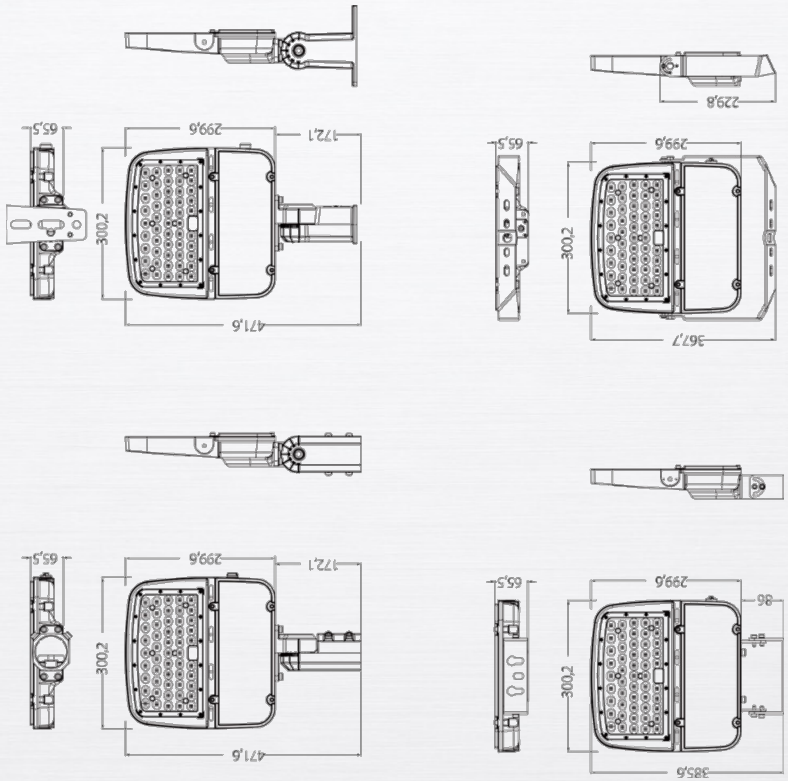








ALPHARD
AD150-4K

GM-ALPH-150W-4KTP3-AD

Power: 150W/100W/75W
CCT: 4000K
Lumen: 180lm/W
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard ad150-5k

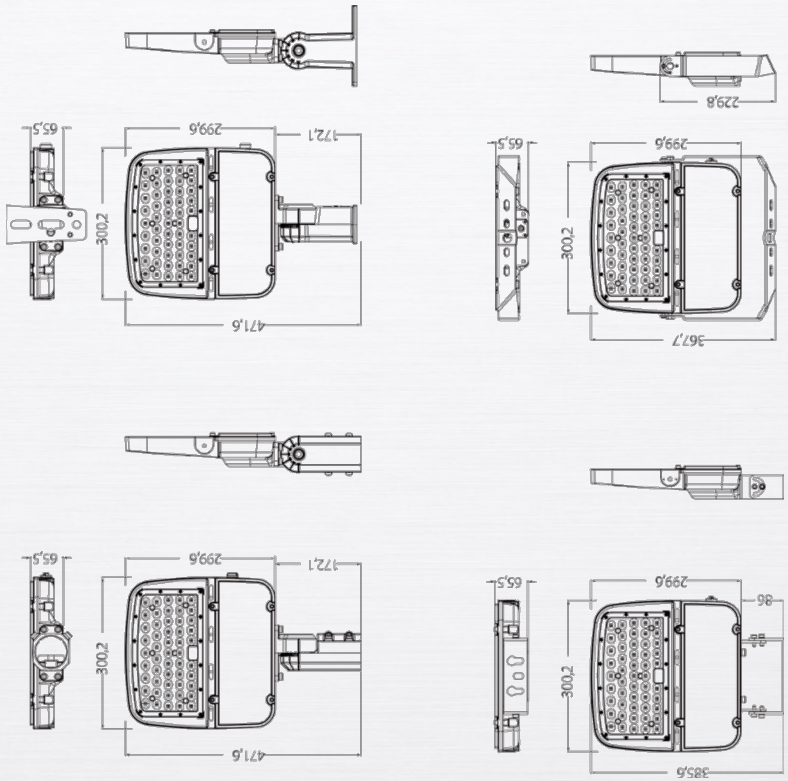



GMTECNOLED




ALPHARD
AD150-5K

GM-ALPH-150W-5KTP3-AD

Power: 150W/100W/75W
CCT: 5000K
Lumen: 180lm/W
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

GMTECNOLED

Drawing Alphard ad240-3k

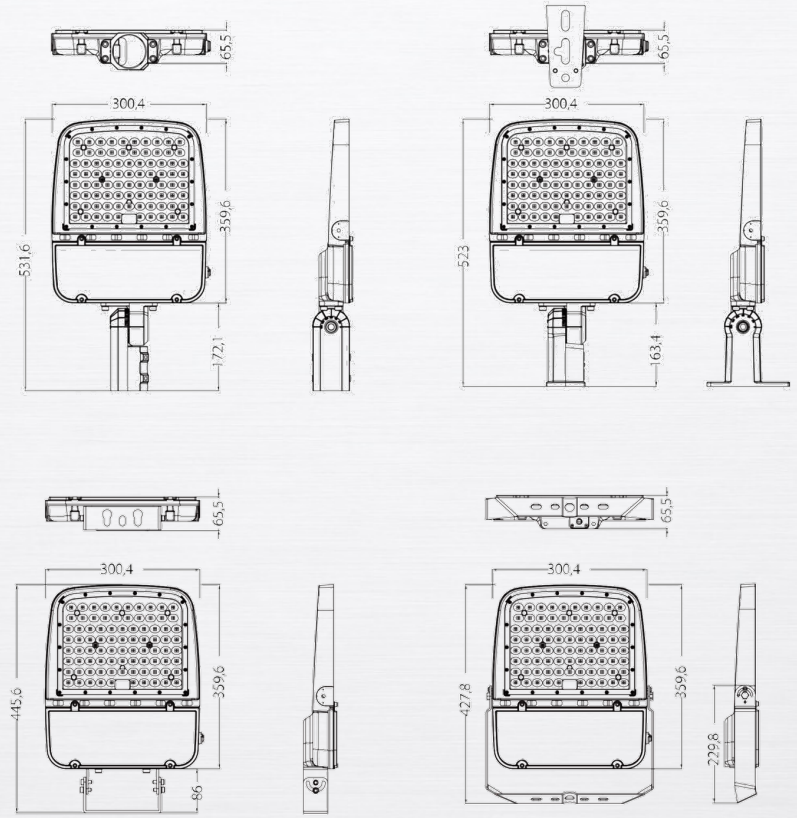





ALPHARD
AD240-3K



GM-ALPH-240W-3KTP3-AD

Power: 240W/200W/150W

CCT: 3000K

Lumen: 180lm/W

Optical option: Type3 (optional: Type4/ Type5)

Dimmerable: 1-10V

CRI: >70

Power factor: >0.95

>100000hr

Degree of protection: IP66

Impact protection: IK08

Operating temperature: -40°C - +50°C

Photobiological Risk: RG0/1

Pole mounted


Driver: Inventronics

Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz

Surge protection: 6kV Differential Mode, 10kV Common Mode

Led: LumiLeds SMD3030

Drawing Alphard ad240-4k

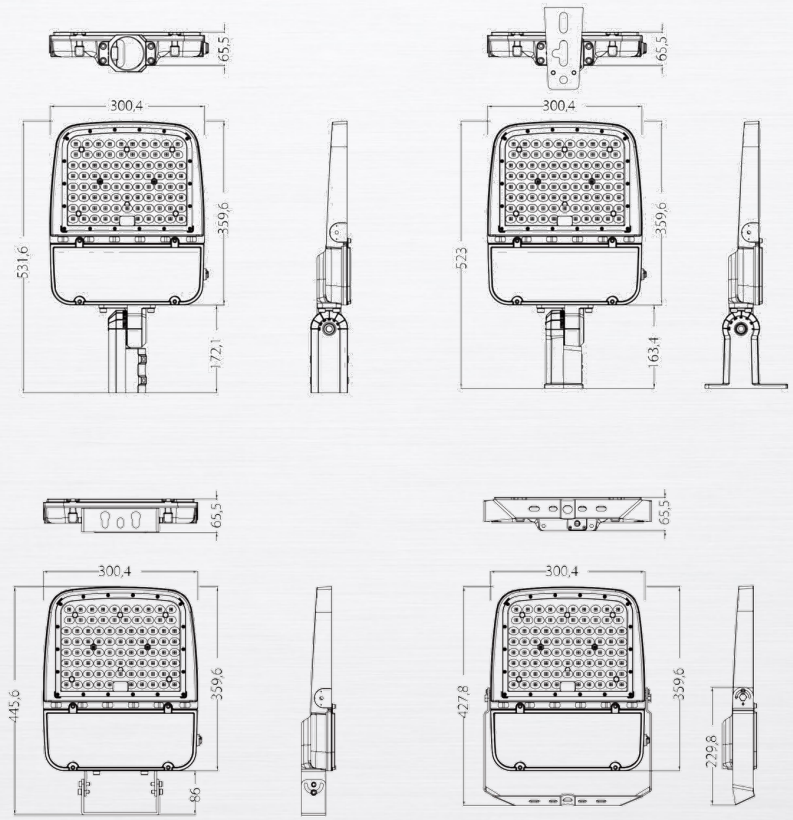



GMTECNOLED


ALPHARD
AD240-4K



GM-ALPH-240W-4KTP3-AD


Power: 240W/200W/150W
CCT: 4000K
Lumen: 180lm/W
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030

Drawing Alphard ad240-5k

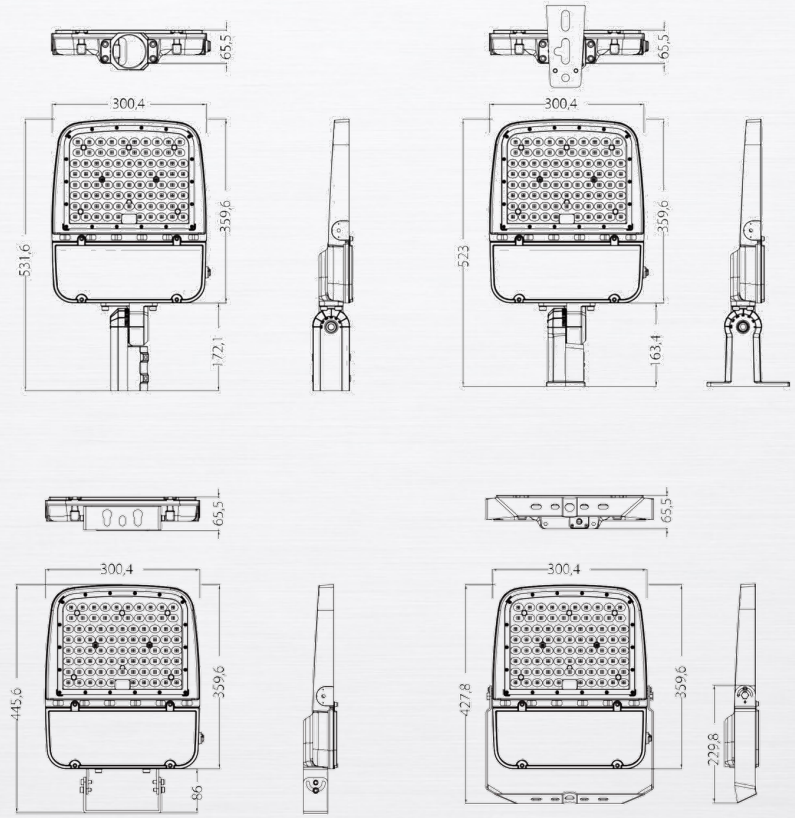



GMTECNOLED

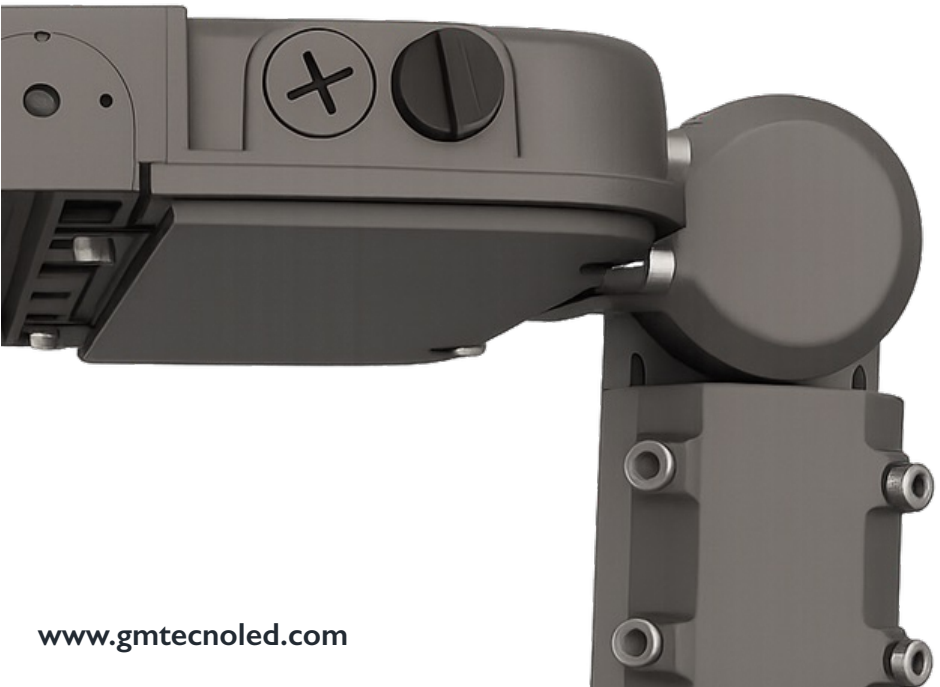

ALPHARD
AD240-5K

GM-ALPH-240W-5KTP3-AD


Power: 240W/200W/150W
CCT: 5000K
Lumen: 180lm/W
Optical option: Type3 (optional: Type4/ Type5)
Dimmerable: 1-10V
CRI: >70
Power factor: >0.95
>100000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +50°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 100-277V, 120-347V, 277-480V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode
Led: LumiLeds SMD3030


ATEX


GMTECNOLED



Drawing GIENAH EX 40

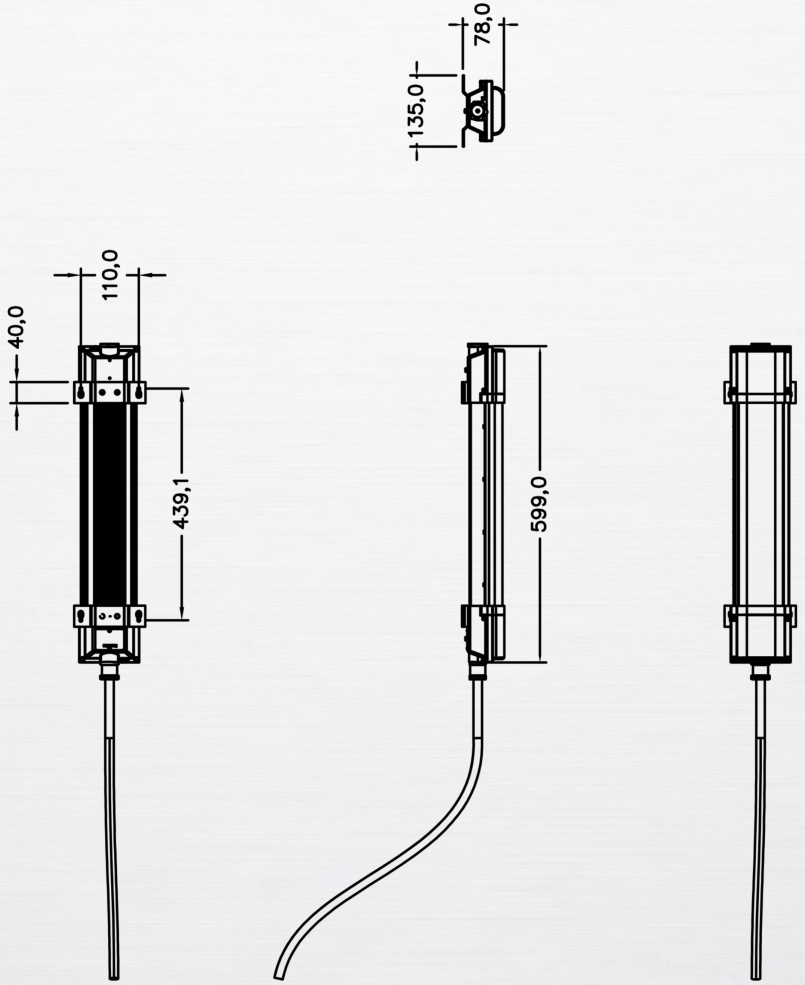

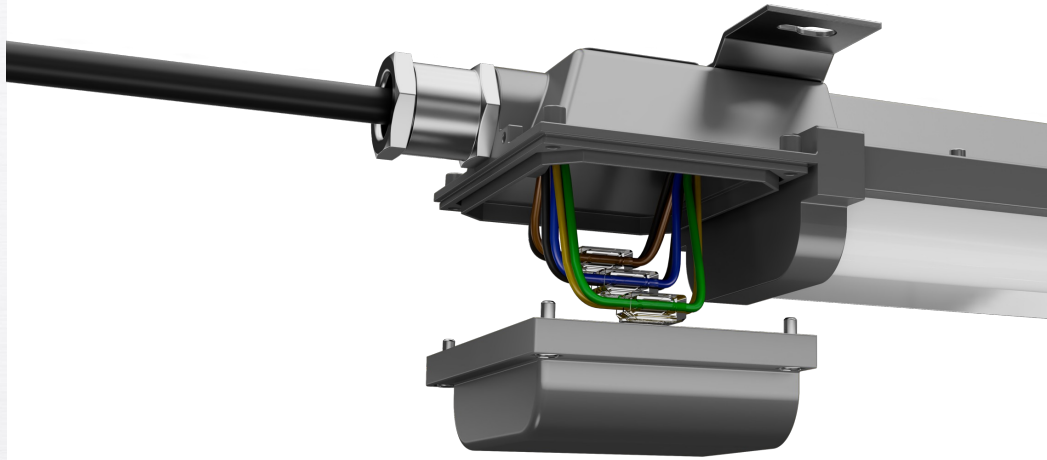

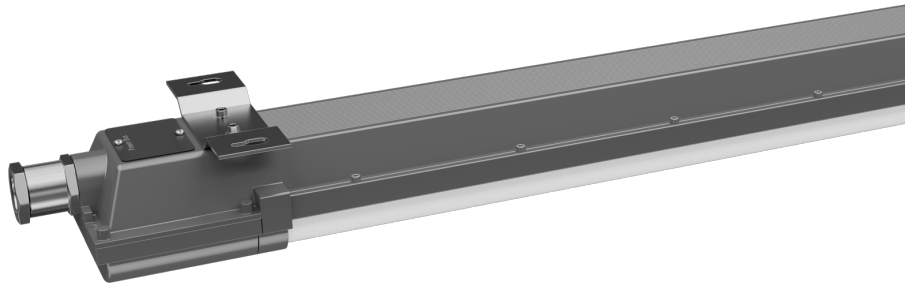

GMTECNOLED





GIENAH EX 40

GM-GIEN-40W-5KD120

Power: 40W
CCT: 5000K
Lumen: 6400
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K (AL6063), 96 W/m*K (ADC12)
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -20°C - +50°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Bridgelux

Drawing GIENAH EX 60

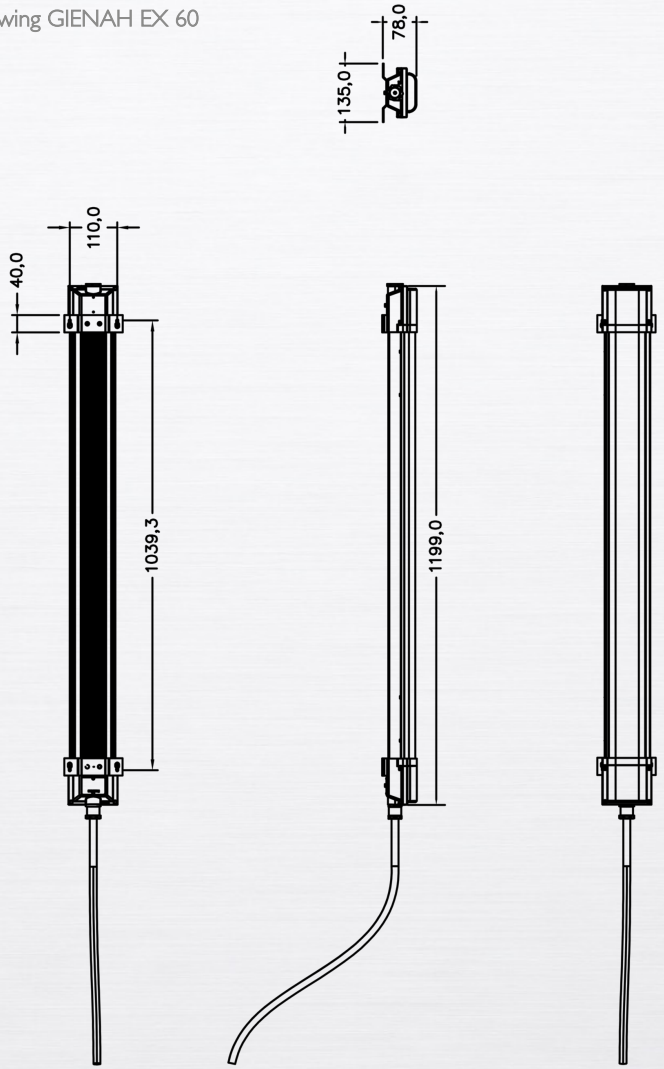


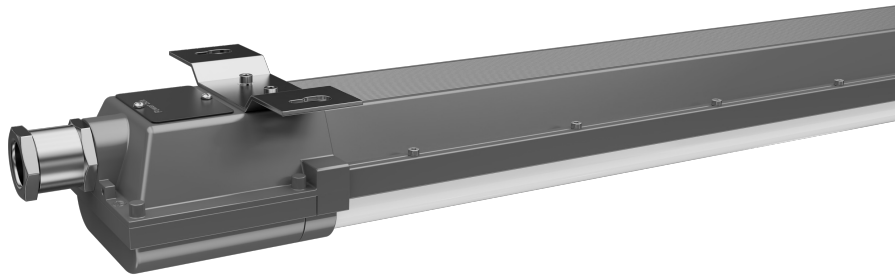



GMTECNOLED



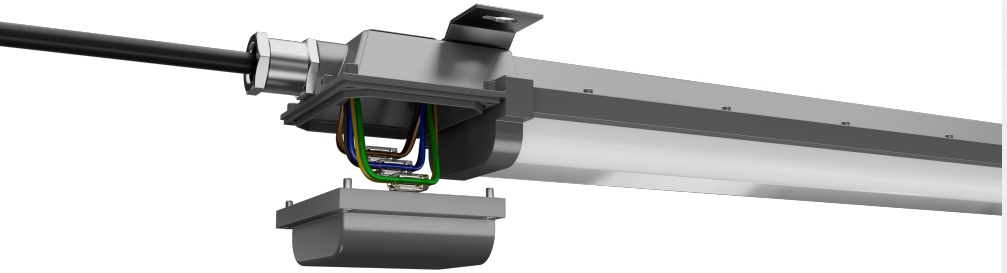



GIENAH EX 60

GM-GIEN-60W-5KD120

Power: 60W
CCT: 5000K
Lumen: 9600
Optical option: 120°
Dimmerable: NO (optional: DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K (AL6063), 96 W/m*K (ADC12)
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -20°C - +50°C
Photobiological Risk: RG0/1
Ceiling mounted
Driver: Tridonic
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Bridgelux

Drawing ALKAID EX 100

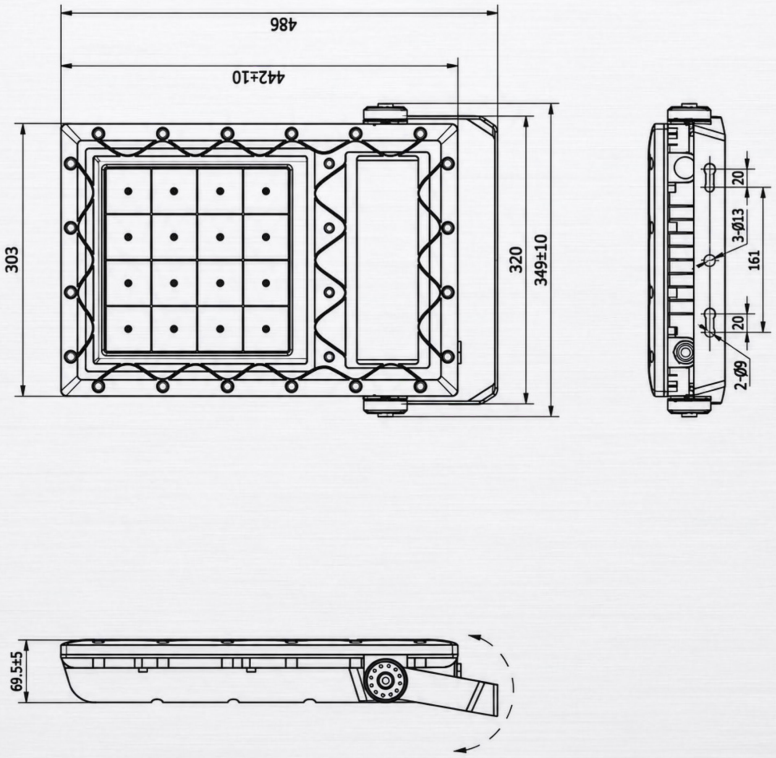

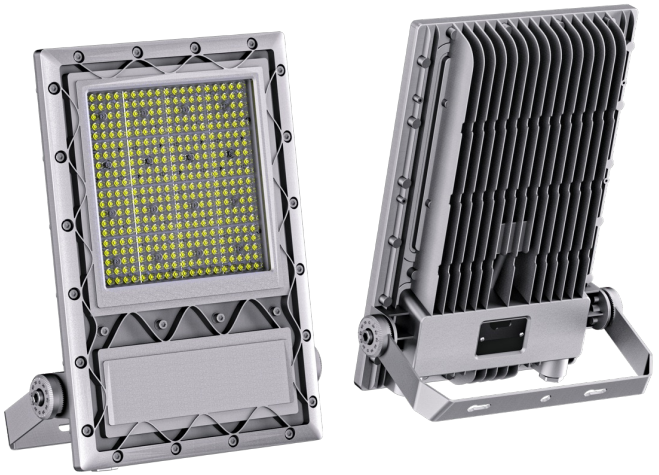


GMTECNOLED


ALKAID EX 100

GM-ALKA-100W-5KTP2

Power: 100W
CCT: 5000K
Lumen: 17000
Optical option: Type2 (optional: 25°/55°/90°/120°/Type3/Type4)
Dimmerable: NO
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -30°C - +50°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
LED: Cree

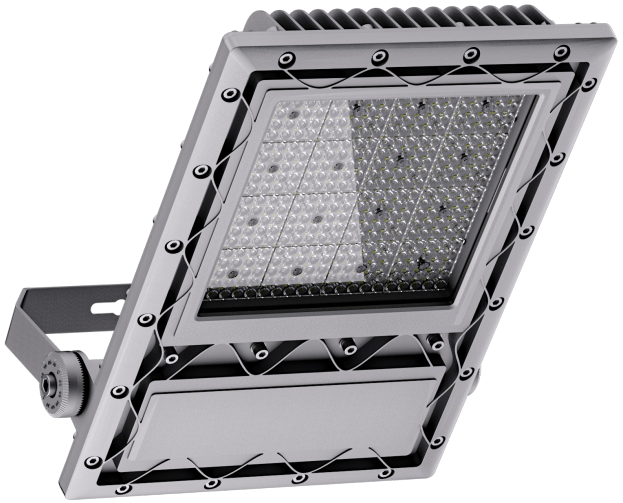

Drawing ALKAID EX 200

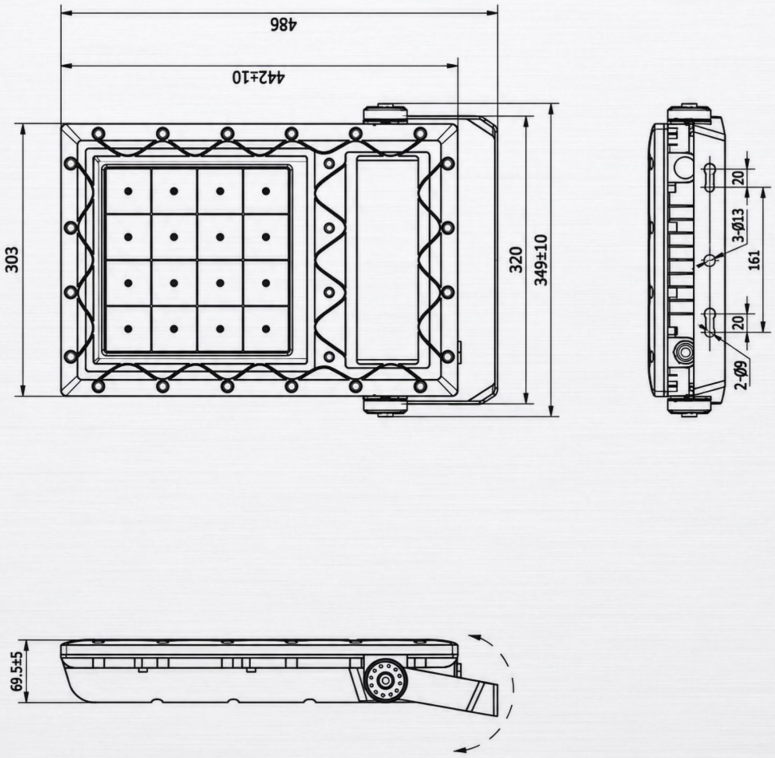




GMTECNOLED


ALKAID EX 200


GM-ALKA-200W-5KTP2

Power: 200W
CCT: 5000K
Lumen: 32000
Optical option: Type2 (optional: 25°/55°/90°/120°/Type3/Type4)
Dimmerable: NO
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK10
Operating temperature: -30°C - +50°C
Photobiological Risk: RG0/1
Wall mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
LED: Cree

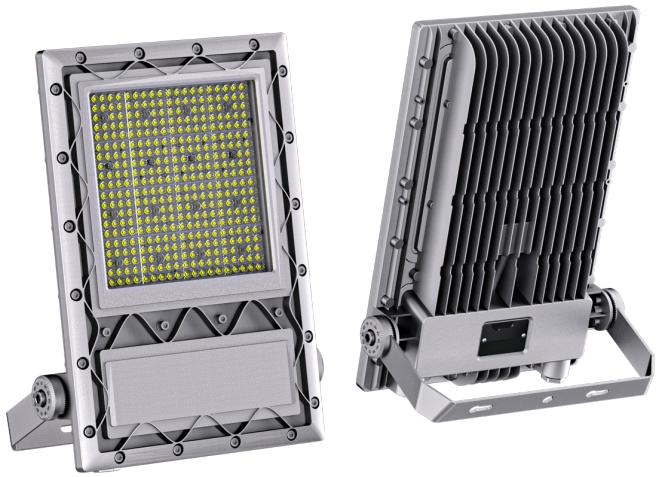

Drawing Arcturus ex 100




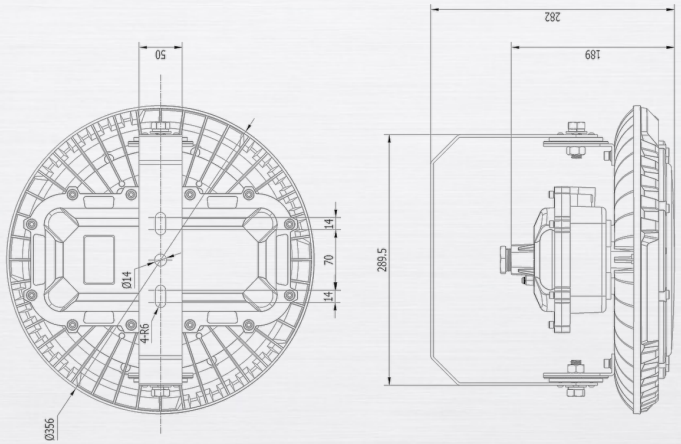







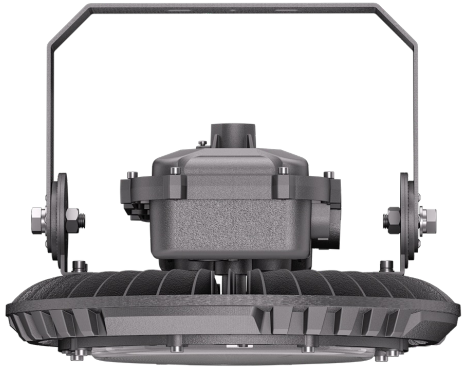



ARCTURUS
EX 100


GM-ARCT-ATX-100W-5KD100

Power: 100W
CCT: 5000K
Lumen: 17000
Optical option: 100°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -30°C - +48°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling mounted
Driver: Meanwell
Voltage - Frequency: 85-305V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Description: ATEX-certified device, suitable for use in potentially explosive atmospheres in accordance with applicable regulations

Drawing Arcturus ex 200



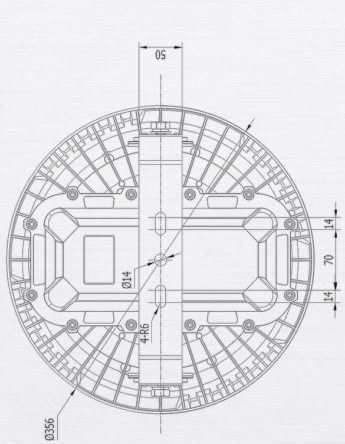

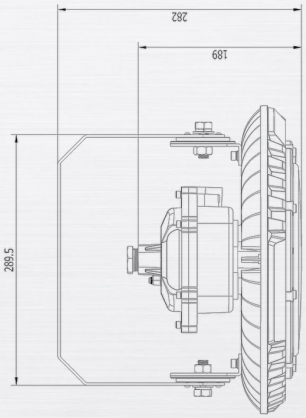






GMTECNOLED



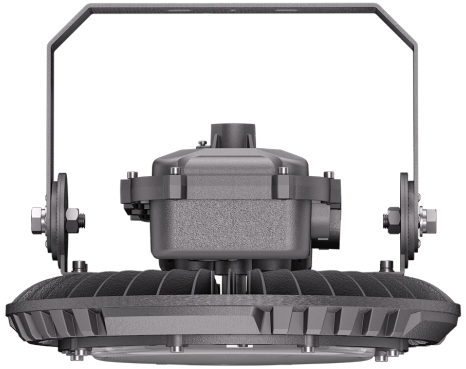

ARCTURUS
EX 200

GM-ARCT-ATX-200W-5KD100


Power: 200W
CCT: 5000K
Lumen: 32000
Optical option: 100°
Dimmerable: NO (optional: 1-10V, PWM, Triac dimming, DALI)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -30°C - +48°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling mounted
Driver: Meanwell
Voltage - Frequency: 85-305V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Description: ATEX-certified device, suitable for use in potentially explosive atmospheres in accordance with applicable regulations

SPORT

GMTECNOLED



prevennova
REALE SEGUROS
#Footters

Drawing Cassiopea dim-ad750-30d

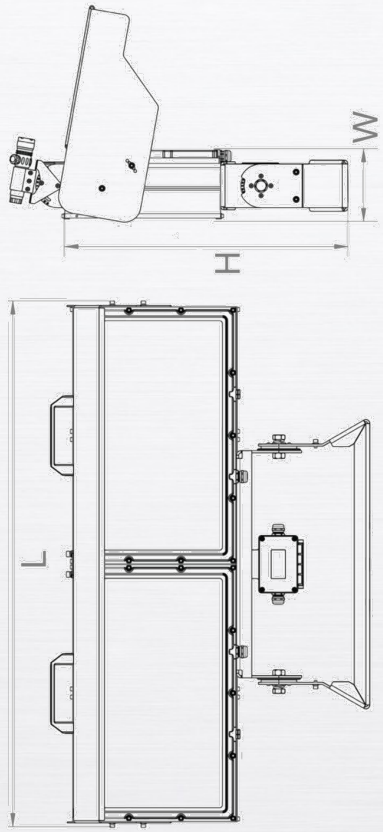

	L	W	H
400W-600W	470mm	127mm	520mm
900W-1200W	920mm	127mm	558mm



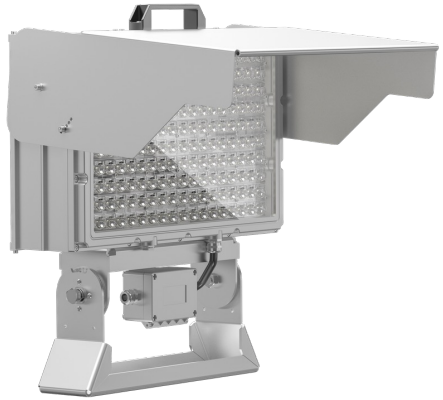

GMTECNOLED






CASSIOPEA
DIM-AD750-30D


GM-CASS-750W-5KD30-AD-DL


Power: 600W/750W
CCT: 5000K
Lumen: 120000
Optical option: 30°
(20°/60°/90°/MBP20/MLP30/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree

Drawing Cassiopea dim-ad750-mlp30

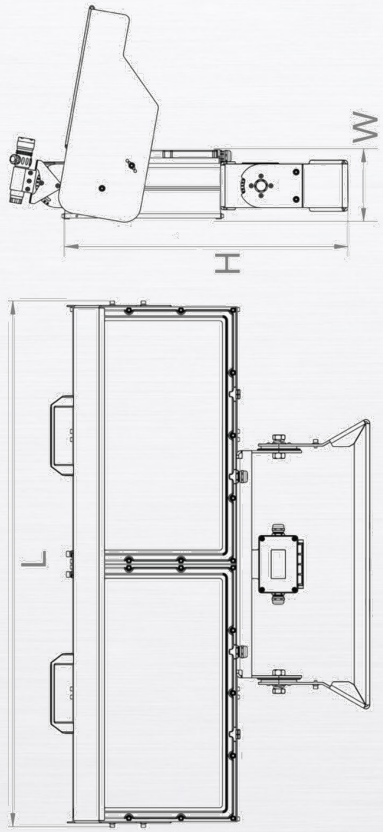

	L	W	H
400W-600W	470mm	127mm	520mm
900W-1200W	920mm	127mm	558mm

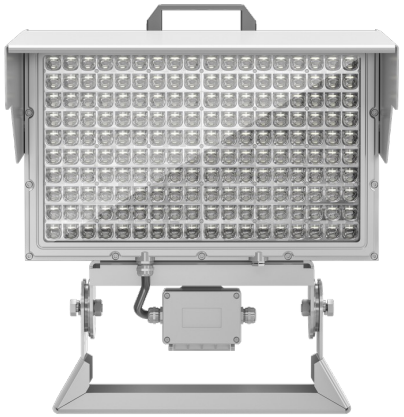

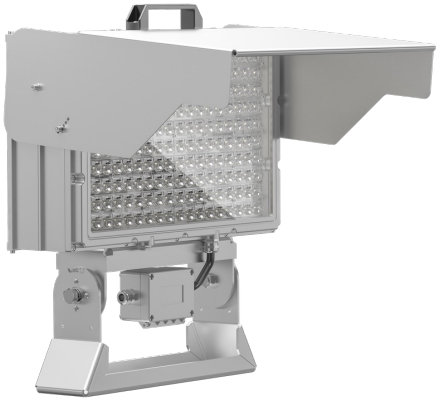






CASSIOPEA
DIM-AD750-MLP30

GM-CASS-750W-5KMLP30-AD-DL


Power: 600W/750W
CCT: 5000K
Lumen: 120000
Optical option: MLP30
(20°/30°/60°/90°/MBP20/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree

Drawing Cassiopea vertical dim-ad1k2-30d

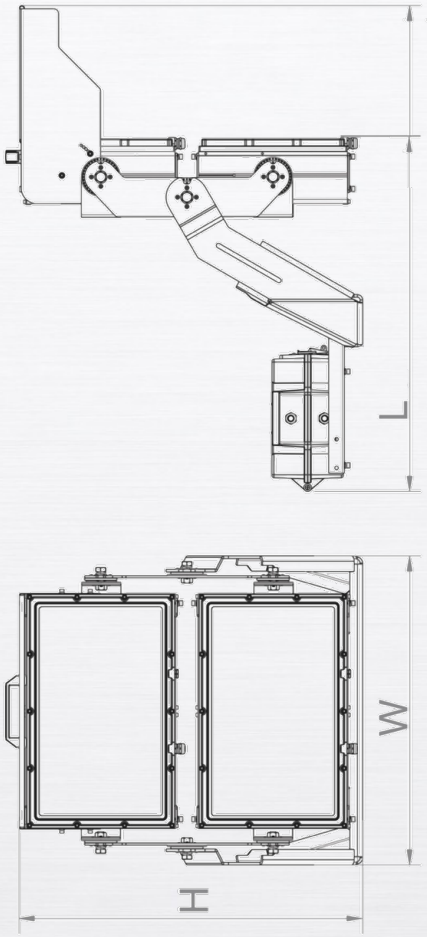

	L	H	W
1200W-1500W	593mm	659mm	402mm



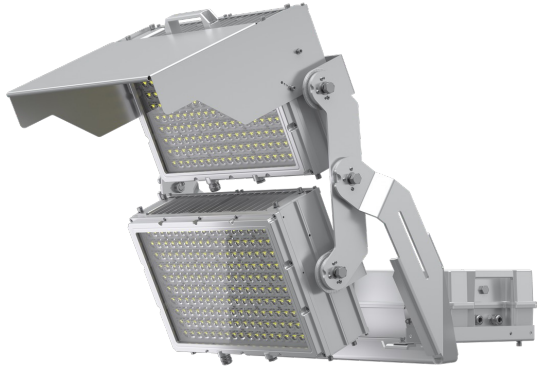




CASSIOPEA VERTICAL DIM-AD1K2-30D

GM-CASS-1200W-5KD30-AD-DL


Power: 1200W
CCT: 5000K
Lumen: 192000
Optical option: 30° (optional: 20°/60°/90°/MBP20/MLP30/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree

Drawing Cassiopea vertical dim-ad1k5-30d

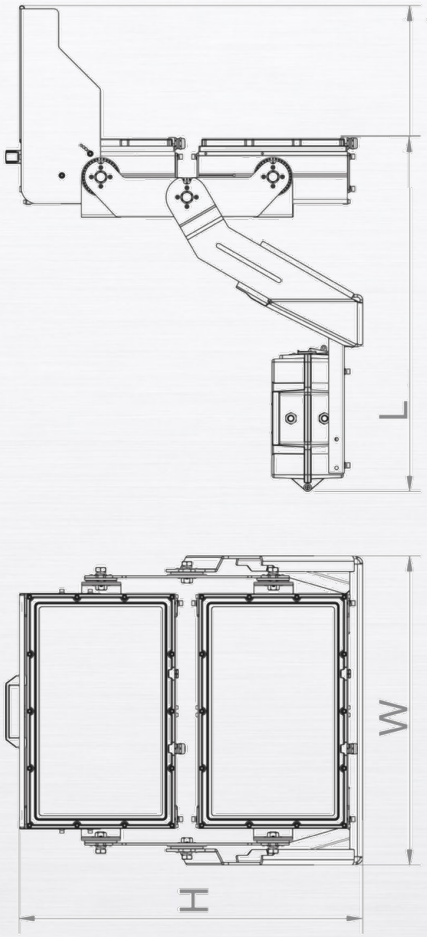

	L	H	W
1200W-1500W	593mm	659mm	402mm



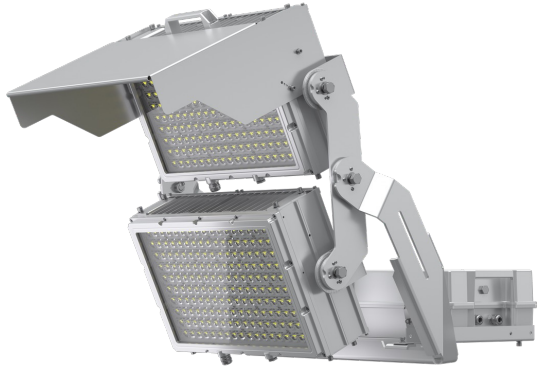

GMTECNOLED




CASSIOPEA VERTICAL DIM-AD1K5-30D

GM-CASS-1500W-5KD30-AD-DL


Power: 1500W
CCT: 5000K
Lumen: 240000
Optical option: 30° (optional: 20°/60°/90°/MBP20/MLP30/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree

Drawing Cassiopea vertical dim-ad1k2-20d

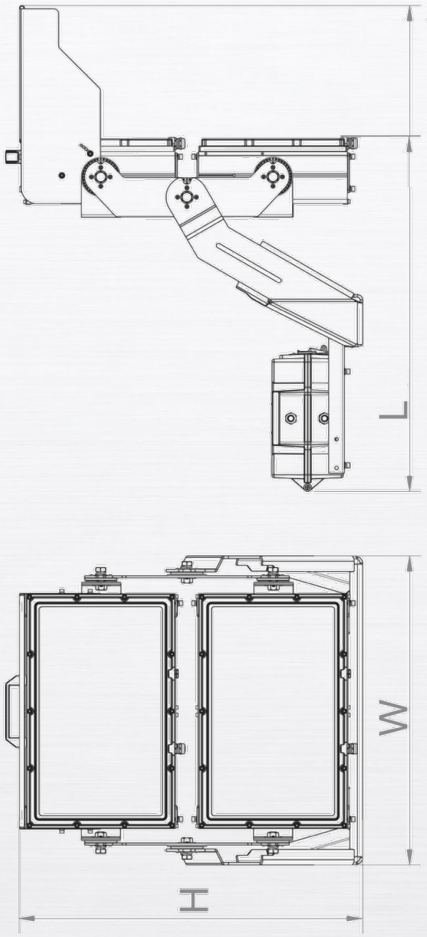

	L	H	W
1200W-1500W	593mm	659mm	402mm



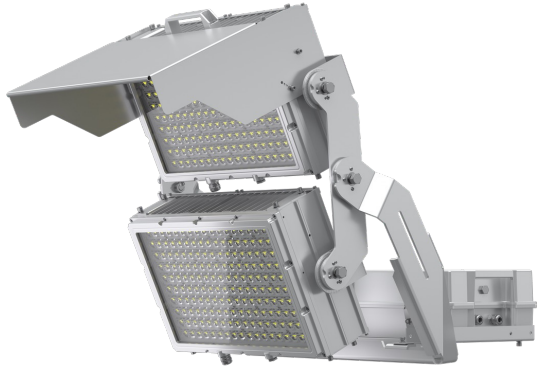




CASSIOPEA VERTICAL DIM-AD1K2-20D

GM-CASS-1200W-5KD20-AD-DL


Power: 1200W
CCT: 5000K
Lumen: 192000
Optical option: 20° (optional: 30°/60°/90°/MBP20/MLP30/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree

Drawing Cassiopea vertical dim-ad1k5-20d

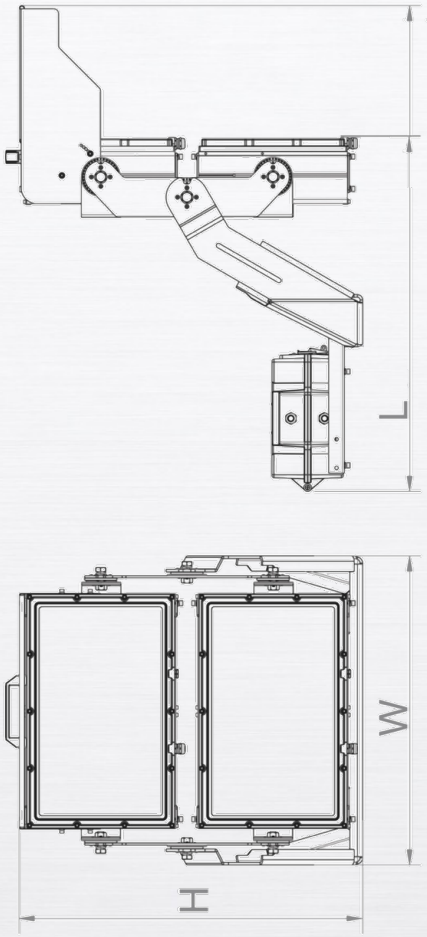

	L	H	W
1200W-1500W	593mm	659mm	402mm



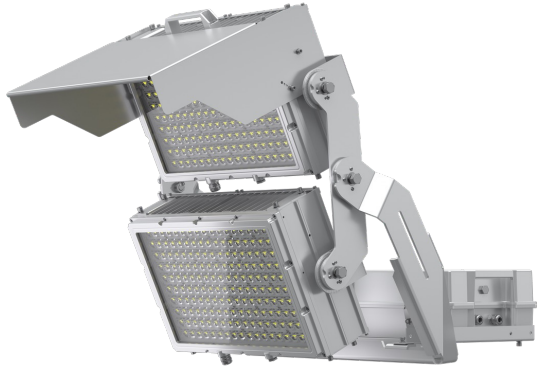





CASSIOPEA VERTICAL DIM-AD1K5-20D


GM-CASS-1500W-5KD20-AD-DL


Power: 1500W
CCT: 5000K
Lumen: 240000
Optical option: 20° (optional: 30°/60°/90°/MBP20/MLP30/MBP45/MBP70)
Dimmerable: 1-10V (optional: DALI-2 and D4i, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>144000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
Led: Cree


Drawing Cassiopea vertical dim500-30d







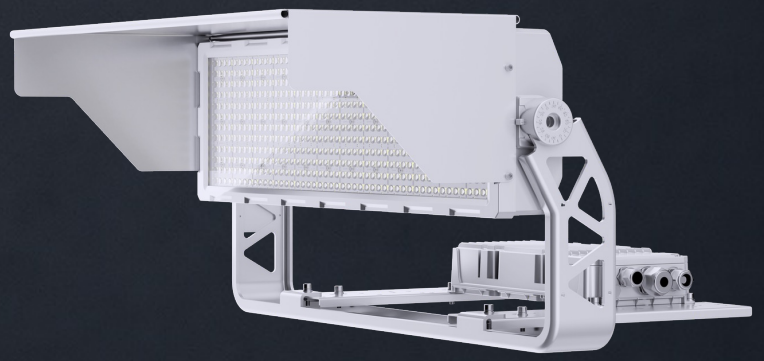

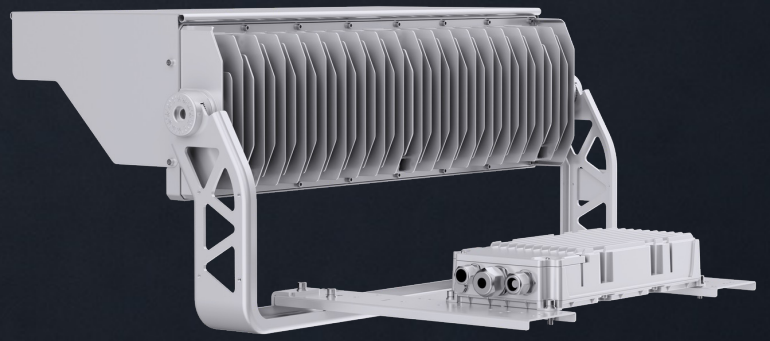

GMTECNOLED




CASSIOPEA VERTICAL DIM500-30D


GM-CASS-500W-5KD30-DL


Power: 500W
CCT: 5000K
Lumen: 85000
Optical option: 30° (optional: 20°/45°/90°/100*60°/T2M/T3M-B /P30/P45/P50)
Dimmerable: DALI (with Sosen driver: 1-10V; optional: DMX, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso (optional: Sosen)
Voltage - Frequency: 198-528V (with Sosen driver: 180-305V) - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (optional: 6kV Differential Mode, 6kV Common Mode)


GMTECNOLED


Drawing Cassiopea vertical dim500-p50







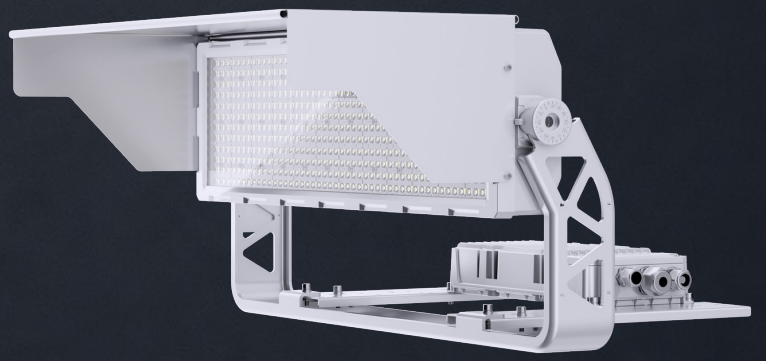

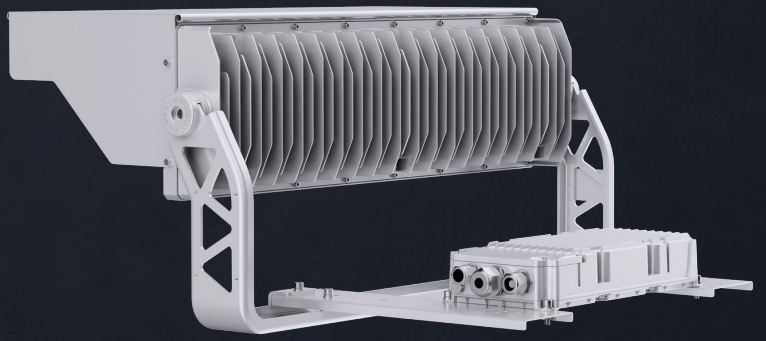

GMTECNOLED





CASSIOPEA VERTICAL DIM500-P50


GM-CASS-500W-5KP50-DL


Power: 500W
CCT: 5000K
Lumen: 85000
Optical option: P50 (optional: 20°/30°/45°/90°/100*60°/T2M/T3M-B /P30/P45)
Dimmerable: DALI (with Sosen driver: 1-10V; optional: DMX, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso (optional: Sosen)
Voltage - Frequency: 198-528V (with Sosen driver: 180-305V) - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (optional: 6kV Differential Mode, 6kV Common Mode)


Drawing Cassiopea vertical dim1k0-20d








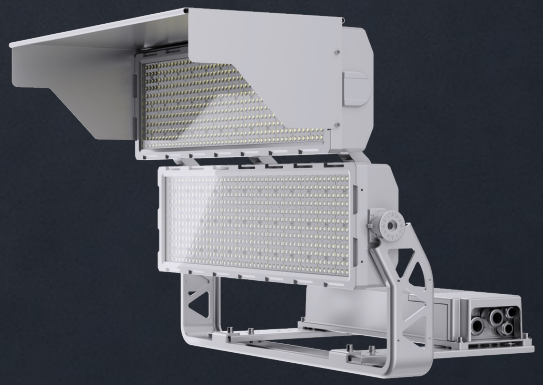

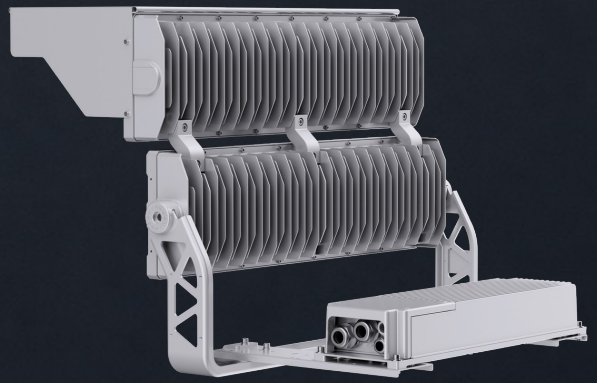

GMTECNOLED

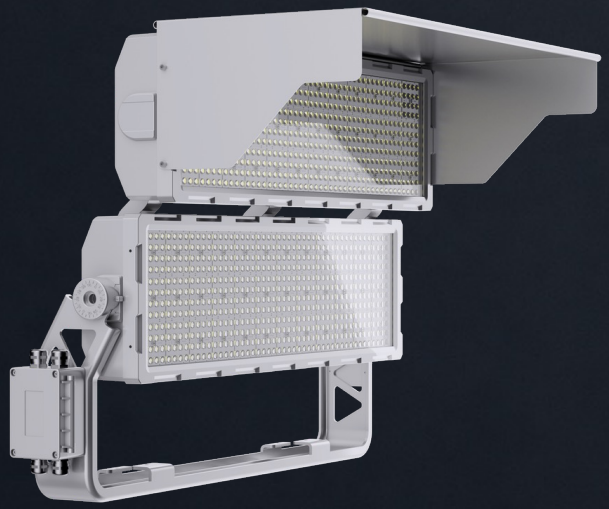


CASSIOPEA VERTICAL DIM1K0-20D


GM-CASS-1000W-5KD20-DL


Power: 1000W
CCT: 5000K
Lumen: 170000
Optical option: 20° (optional: 30°/45°/90°/100*60°/T2M/T3M-B /P30/P45/P50)
Dimmerable: DALI (with Sosen driver: 1-10V; optional: DMX, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso (optional: Sosen)
Voltage - Frequency: 198-440V (with Sosen driver: 180-305V) - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)


GMTECNOLED


Drawing Cassiopea vertical dim1k0-30d








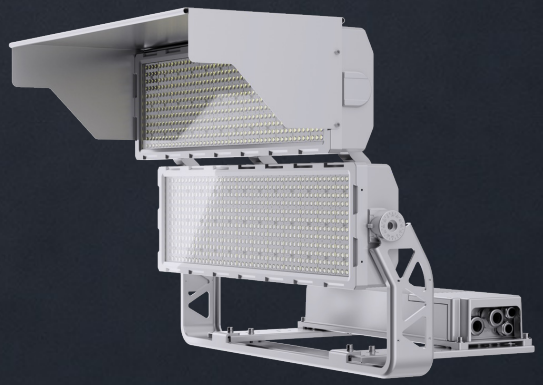

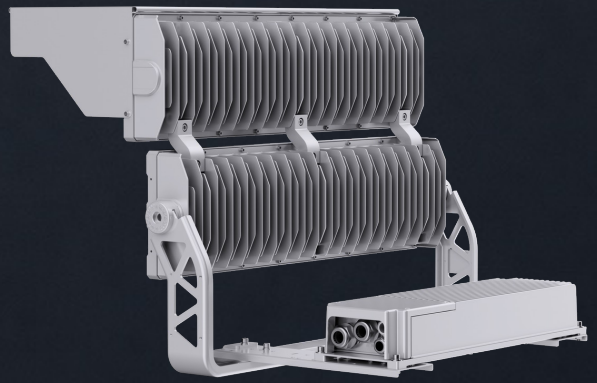

GMTECNOLED

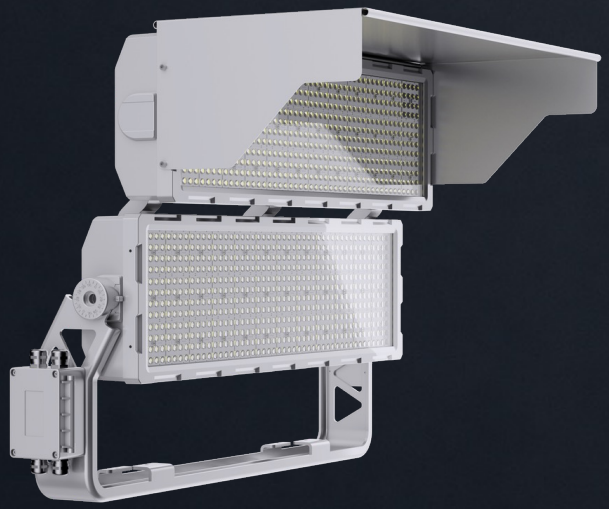


CASSIOPEA VERTICAL DIM1K0-30D


GM-CASS-1000W-5KD30-DL


Power: 1000W
CCT: 5000K
Lumen: 170000
Optical option: 30° (optional: 20°/45°/90°/100*60°/T2M/T3M-B /P30/P45/P50)
Dimmerable: DALI (with Sosen driver: 1-10V; optional: DMX, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso (optional: Sosen)
Voltage - Frequency: 198-440V (with Sosen driver: 180-305V) - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)

GMTECNOLED


Drawing Cassiopea vertical dim1k0-p50










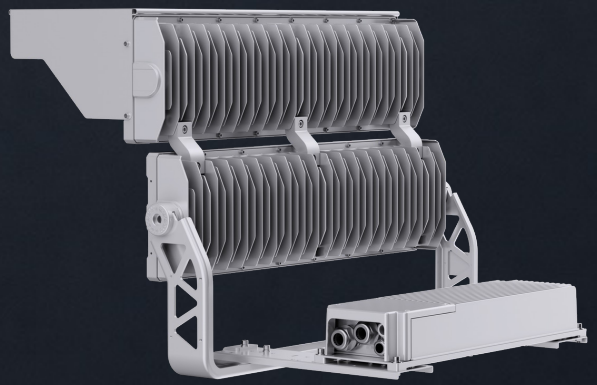

GMTECNOLED

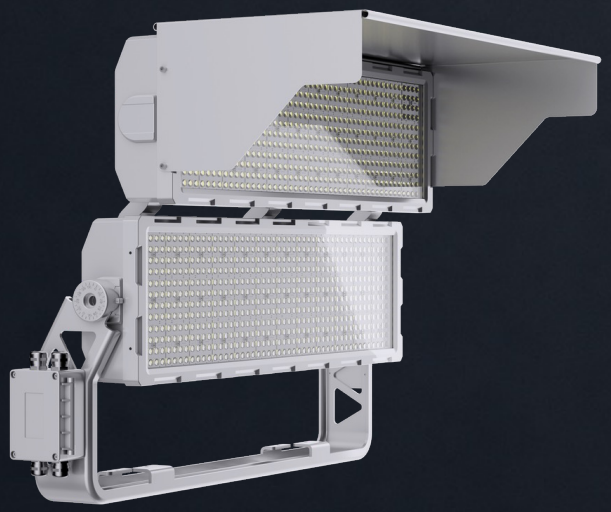



CASSIOPEA VERTICAL DIM1K0-P50


GM-CASS-1000W-5KP50-DL

Power: 1000W
CCT: 5000K
Lumen: 170000
Optical option: P50 (optional: 20°/30°/45°/90°/100*60°/T2M/T3M-B /P30/P45)
Dimmerable: DALI (with Sosen driver: 1-10V; optional: DMX, 0-10V, PMW, Passive Resistance dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso (optional: Sosen)
Voltage - Frequency: 198-440V (with Sosen driver: 180-305V) - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)


Drawing Cassiopea vertical dim1k5-20d





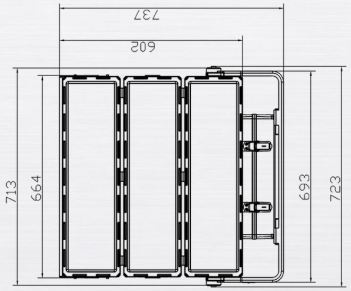



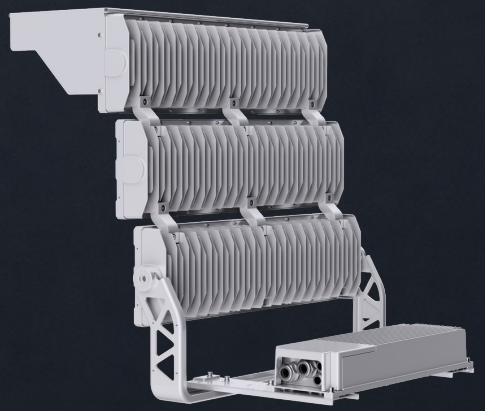

GMTECNOLED





CASSIOPEA VERTICAL DIM1K5-20D


GM-CASS-1500W-5KD20-DL

Power: 1500W
CCT: 5000K
Lumen: 255000
Optical option: 20° (optional: 30°/45°/90°/100*60°/T2M/T3M-B /P30/P45/P50)
Dimmerable: DALI (optional: DMX)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso
Voltage - Frequency: 198-440V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)


Drawing Cassiopea vertical dim1k5-30d





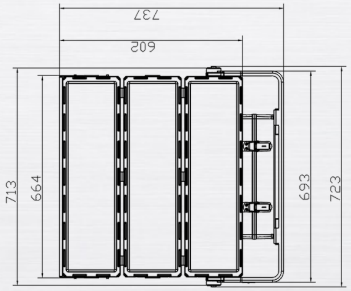



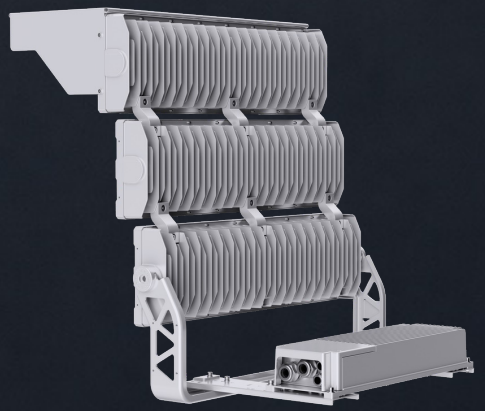

GMTECNOLED




CASSIOPEA VERTICAL DIM1K5-30D


GM-CASS-1500W-5KD30-DL


Power: 1500W
CCT: 5000K
Lumen: 255000
Optical option: 30° (optional: 20°/45°/90°/100*60°/T2M/T3M-B /P30/P45/P50)
Dimmerable: DALI (optional: DMX)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso
Voltage - Frequency: 198-440V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)

GMTECNOLED


Drawing Cassiopea vertical dim1k5-p50





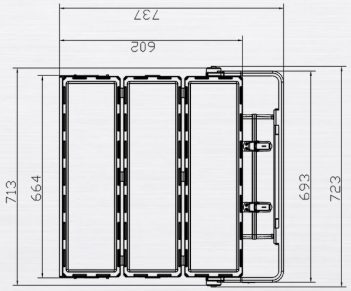



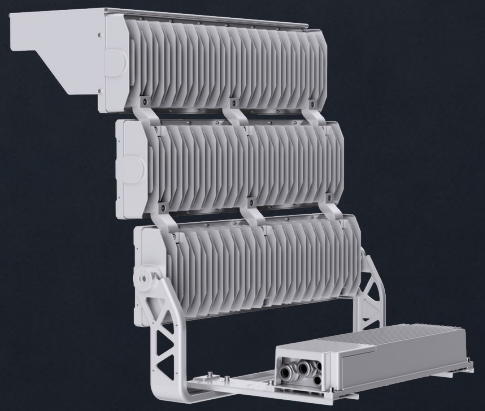

GMTECNOLED




CASSIOPEA VERTICAL DIM1K5-P50

GM-CASS-1500W-5KP50-DL

Power: 1500W
CCT: 5000K
Lumen: 255000
Optical option: P50 (optional: 20°/30°/45°/90°/100*60°/T2M/T3M-B /P30/P45)
Dimmerable: DALI (optional: DMX)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Moso
Voltage - Frequency: 198-440V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode (with Sosen driver: 6kV Differential Mode, 6kV Common Mode)

Drawing Albireo padel 150

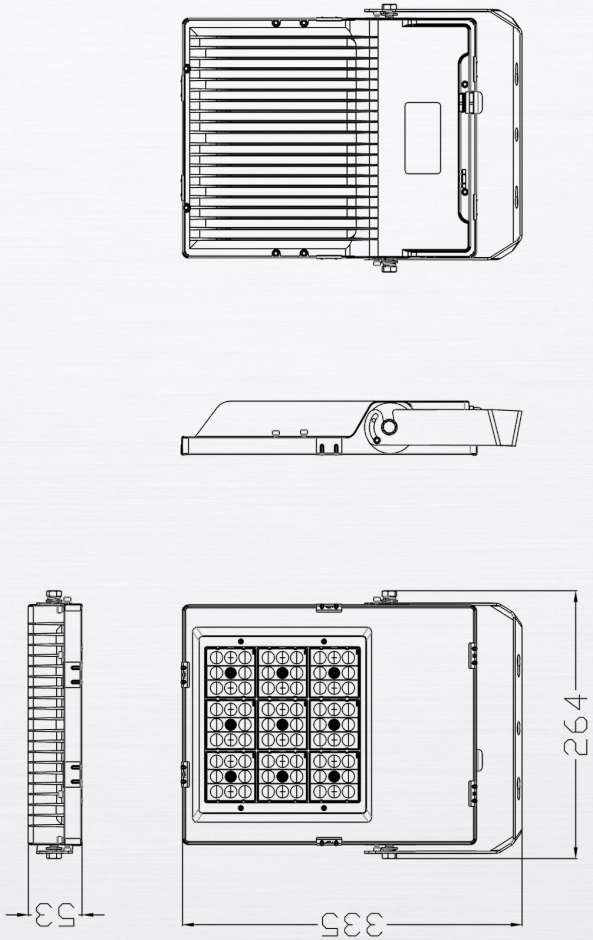



GMTECNOLED




ALBIREO PADEL 150

GM-ALBI-PAD-150W-5K100X60

Power: 150W
CCT: 5000K
Lumen: 25500
Optical option: 100*60°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo padel ad150

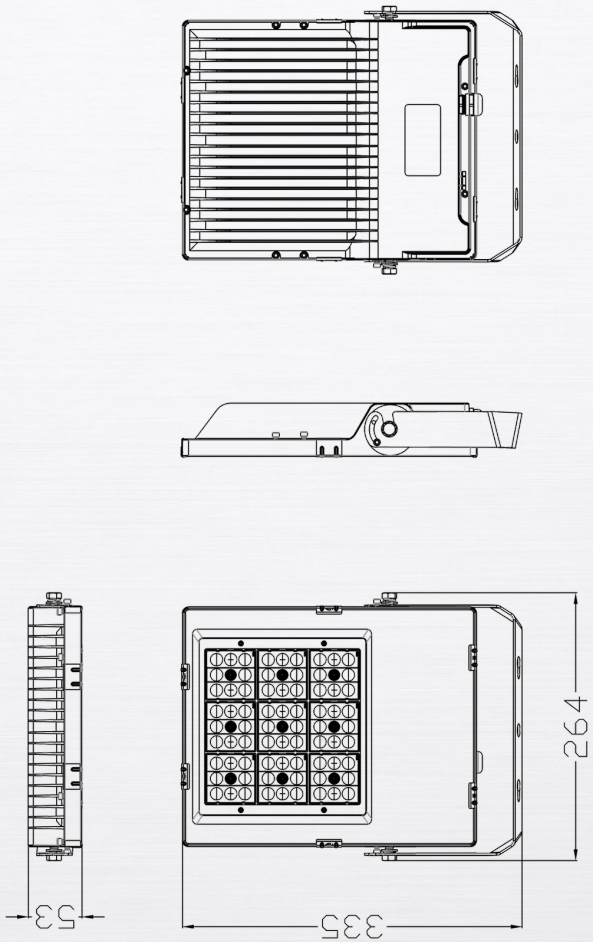



GMTECNOLED




ALBIREO PADEL AD150

GM-ALBI-PAD-150W-5K100X60-AD

Power: 150W/120W/90W/60W
CCT: 5000K
Lumen: 25500
Optical option: 100*60°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo padel ad240



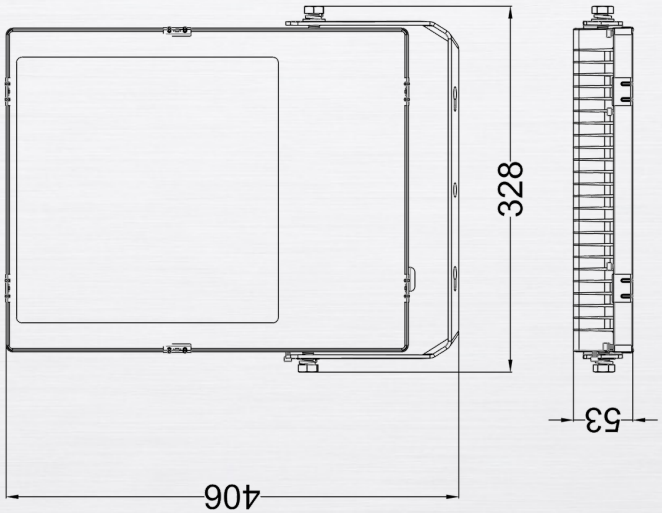



GMTECNOLED




ALBIREO PADEL AD240

GM-ALBI-PAD-240W-5K100X60-AD

Power: 240W/200W/150W/100W
CCT: 5000K
Lumen: 40800
Optical option: 100*60°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo tennis ad150

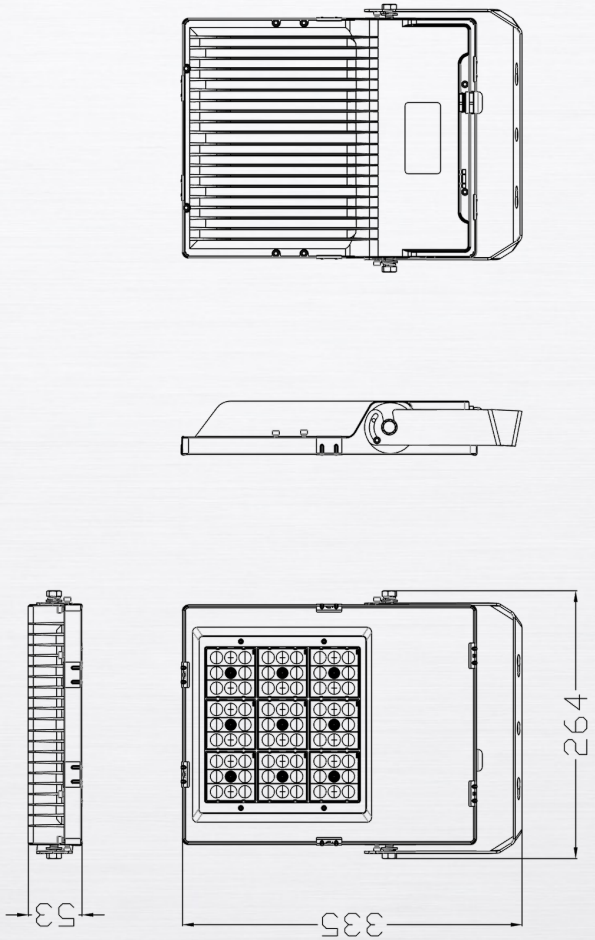





GMTECNOLED




ALBIREO TENNIS AD150

GM-ALBI-TEN-150W-4K120X45-AD


Power: 150W/120W/90W/60W
CCT: 4000K
Lumen: 25500
Optical option: 120*45°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo tennis ad240



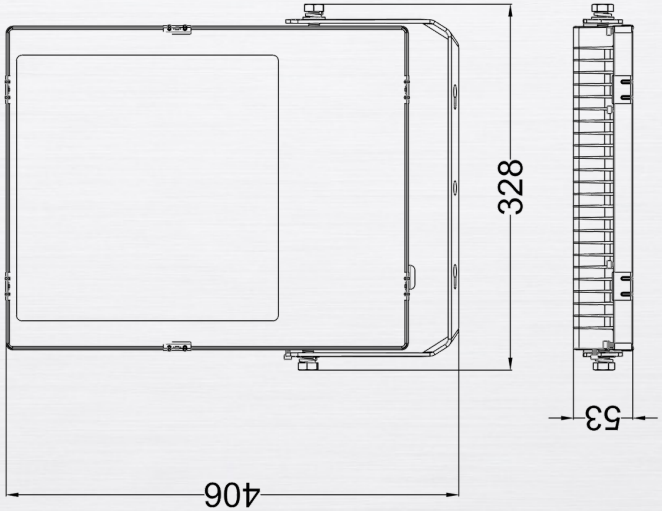



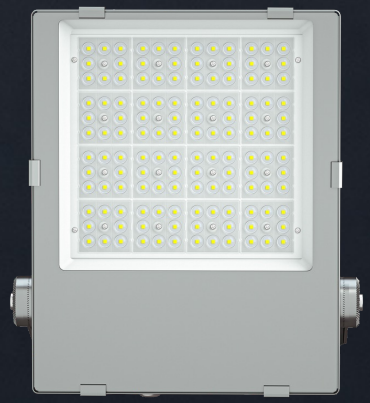

GMTECNOLED




ALBIREO TENNIS AD240

GM-ALBI-TEN-240W-4K120X45-AD

Power: 240W/200W/150W/100W
CCT: 4000K
Lumen: 40800
Optical option: 120*45°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing Albireo tennis ad400

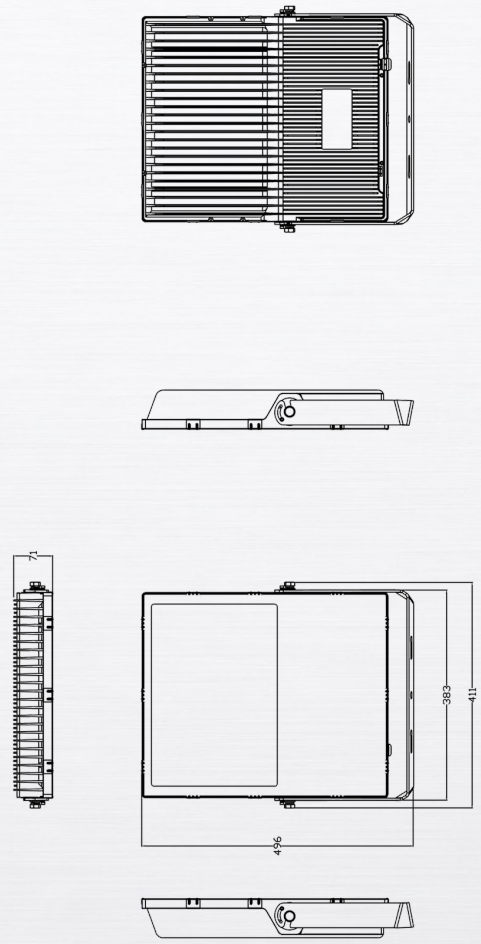





GMTECNOLED




ALBIREO TENNIS AD400


GM-ALBI-TEN-400W-4K120X45-AD

Power: 400W/320W/240W/160W
CCT: 4000K
Lumen: 68000
Optical option: 120*45°
Dimmerable: NO (optional: DALI-2, 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP66
Impact protection: IK08 (IK10 with stainless steel mesh protection)
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall/pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)
Led: Philips

Drawing ENIF PADEL AD60

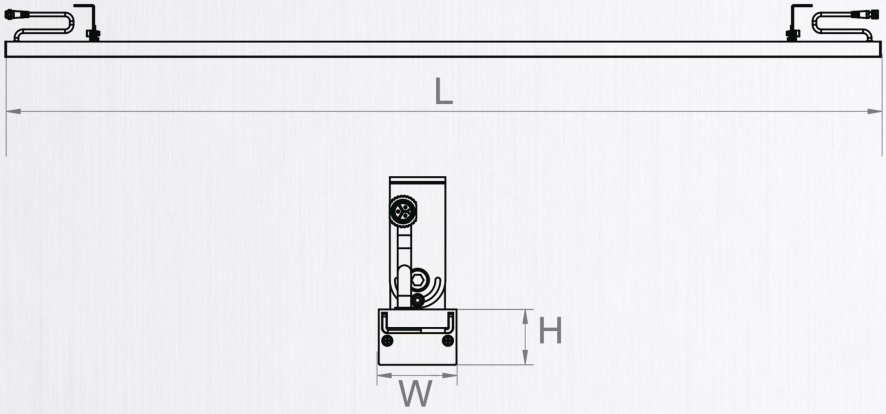

	L	W	H
400W-600W	1989mm	49mm	35mm

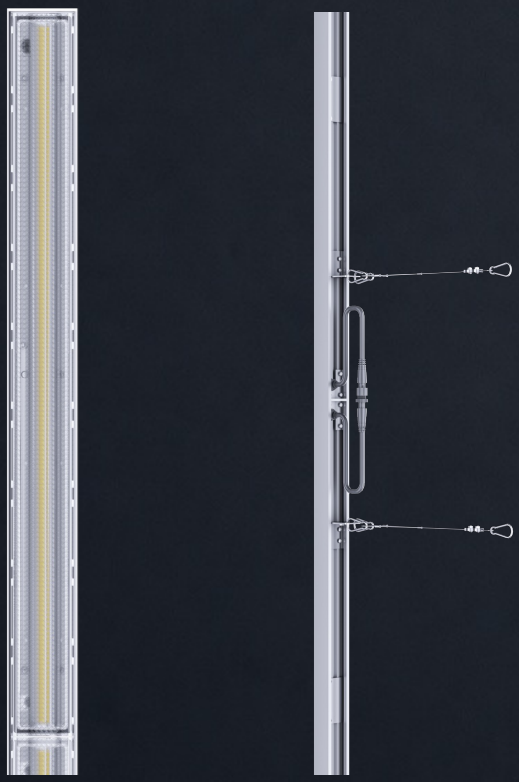




ENIF PADEL AD60

GM-ENIF-60W-5KP30-AD


Power: 24W/40W/55W/60W
CCT: 5000K
Lumen: 190lm/W
Optical option: P30
Dimmerable: NO (optional: DALI-2 and D4i or 0/1-10V, PWM, Passive Resistance dimming)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Suspended mounted
Driver: Inventronics
Voltage - Frequency: 180-528V - 50/60Hz
Surge protection: 10kV Differential Mode, 10kV Common Mode
LED: Lumileds

GMTECNOLED


Drawing DABIH TENNIS AD75

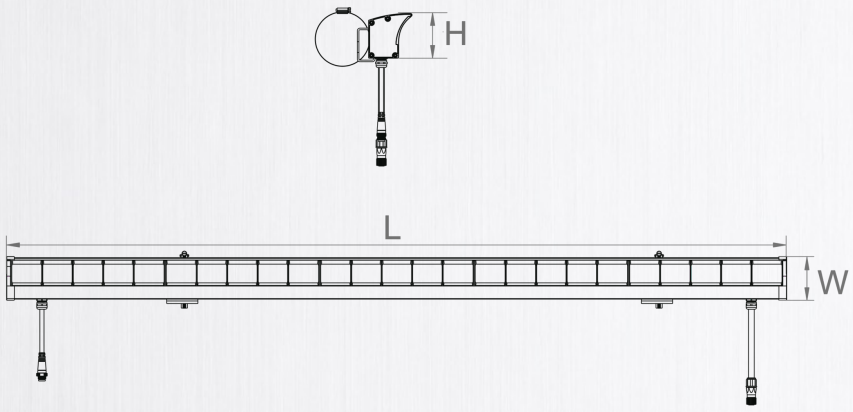

	L	W	H
400W-600W	1516mm	117mm	83mm

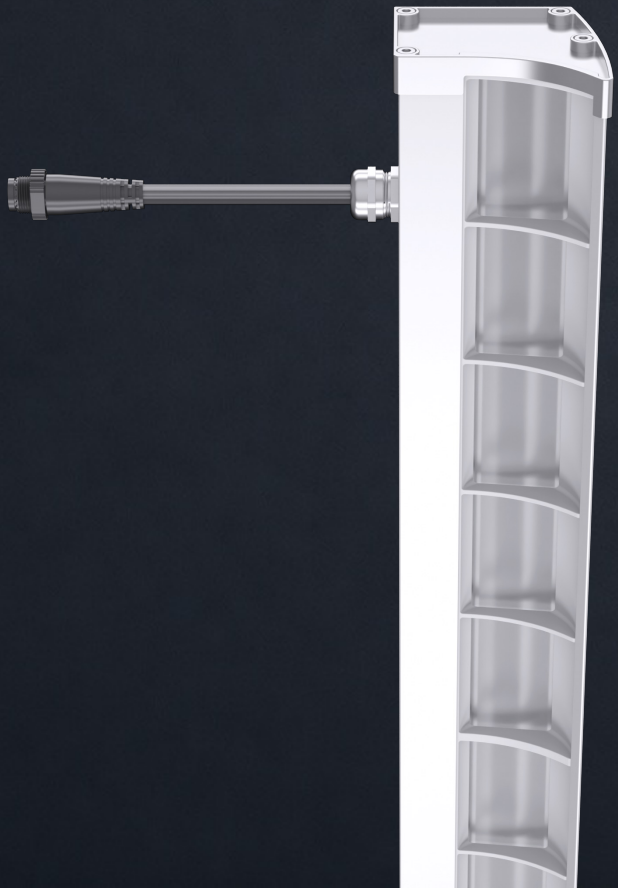




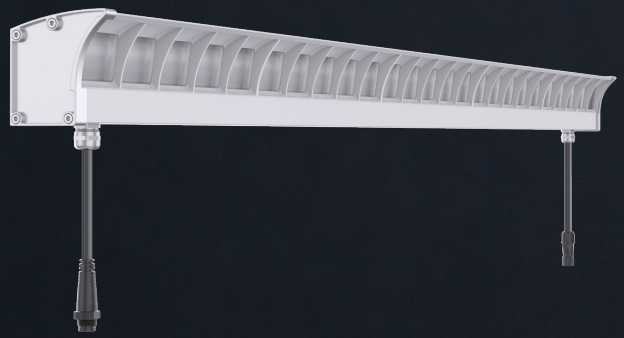

DABIH TENNIS AD75


GM-DABI-75W-5KP70-AD

Power: 45W/60W/70W
CCT: 5000K
Lumen: 11250
Optical option: P70
Dimmerable: NO
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Driver: BOKE
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode, 2kV Common Mode
LED: Philips

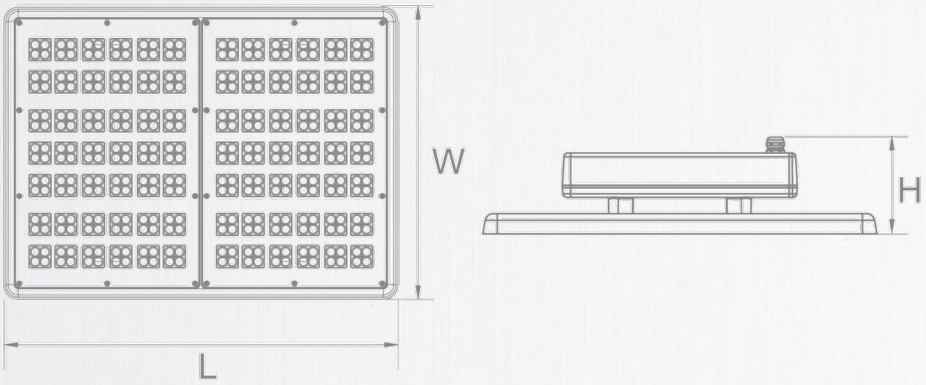

Drawing Alcione pro 120

	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm

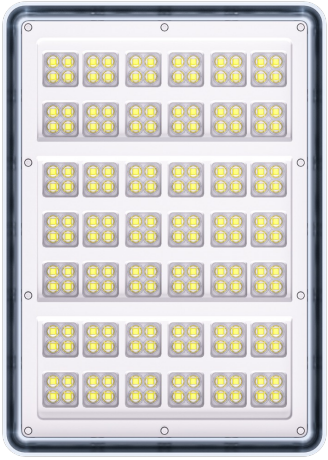






ALCIONE PRO 120


GM-ALCI-PRO-120W-4KD110


Power: 120W
CCT: 4000K
Lumen: 19200
Optical option: 110° (for option: 80°/30*90°)
Dimmerable: 0-10V (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
UGR: <21-23
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Meanwell
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Led: CreeJK 3030

Drawing Alcione pro 200

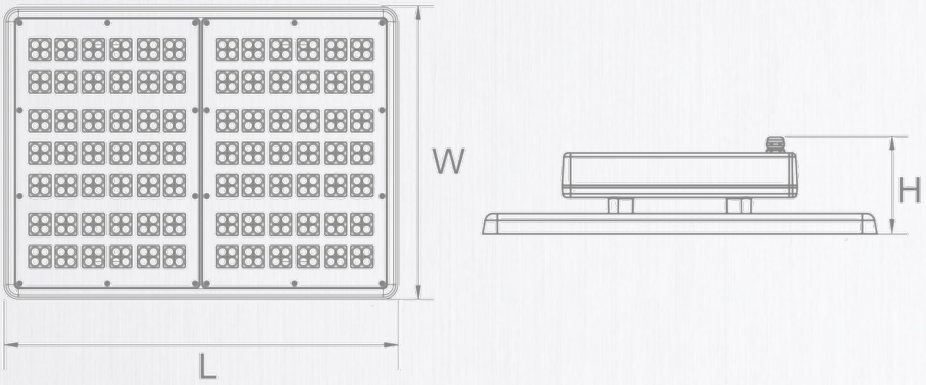

	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm

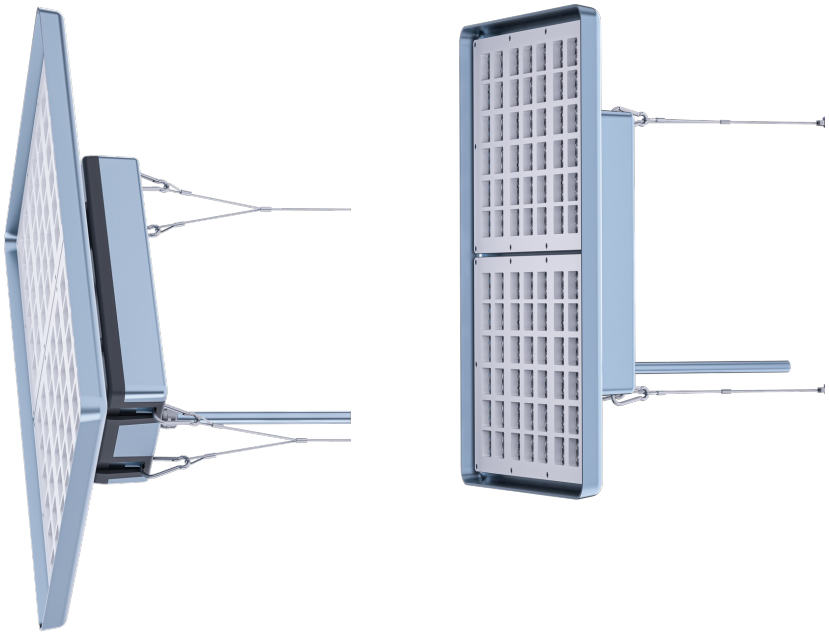

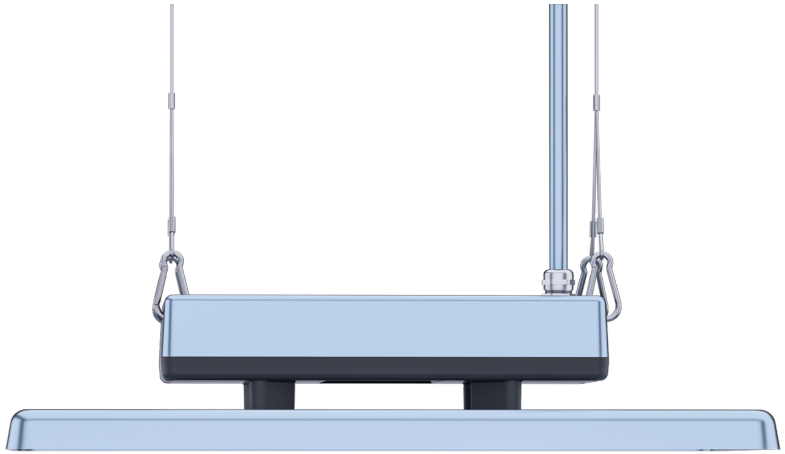


ALCIONE PRO 200


GM-ALCI-PRO-200W-4KD110

Power: 200W
CCT: 4000K
Lumen: 32000
Optical option: 110° (for option: 80°/30*90°)
Dimmerable: 0-10V (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
UGR: <21-23
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Meanwell
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Led: CreeJK 3030

Drawing Alcione 120d

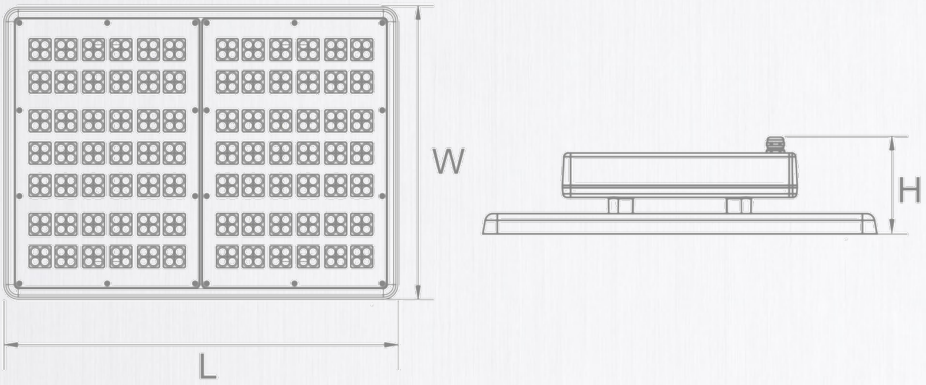

	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm

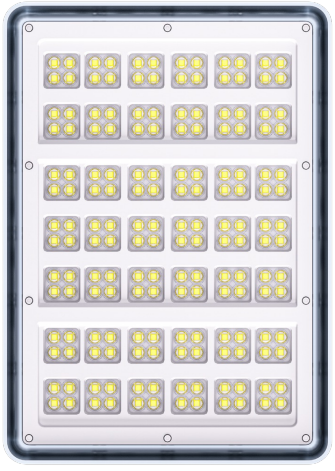




ALCIONE 120D


GM-ALCI-120W-4KD10-DL

Power: 120W
CCT: 4000K
Lumen: 19200
Optical option: 110°
Dimmerable: DALI
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Led: Philips


Drawing Alcione 200d

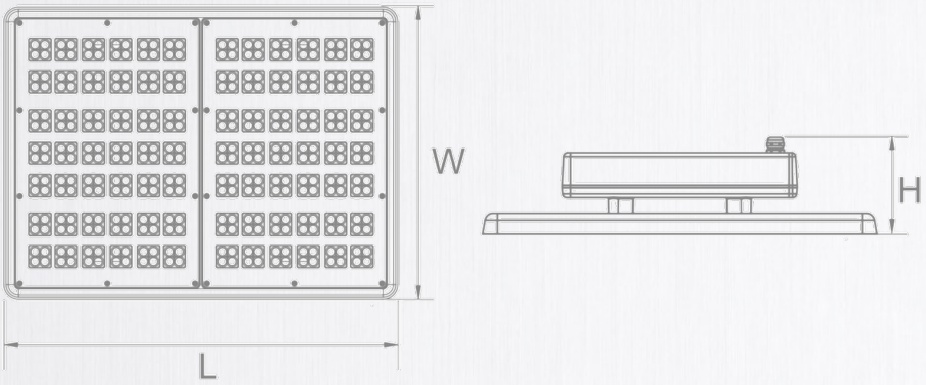

	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm

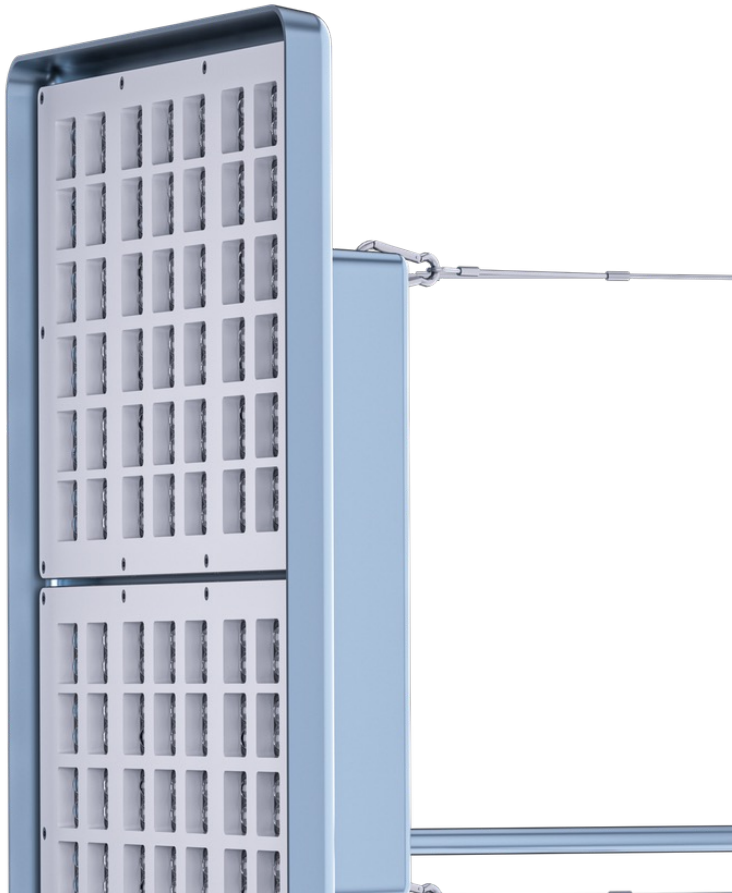



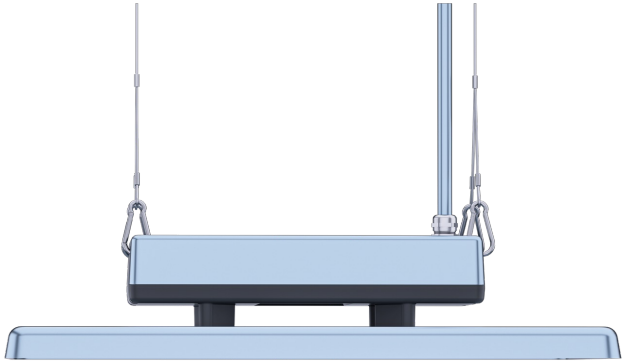


ALCIONE 200D

GM-ALCI-200W-4K110-DL

Power: 200W
CCT: 4000K
Lumen: 32000
Optical option: 110°
Dimmerable: DALI
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >108000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 4kV Differential Mode, 6kV Common Mode
Led: Philips

Drawing Alcione 120

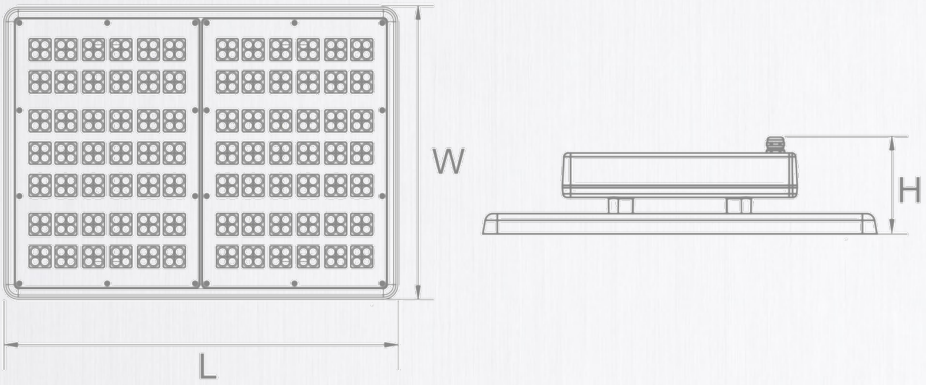


	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm




ALCIONE 120

GM-ALCI-120W-4KD110


Power: 120W
CCT: 4000K
Lumen: 19200
Optical option: 110° (for option: 80°/30*90°)
Dimmerable: 0-10V (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips

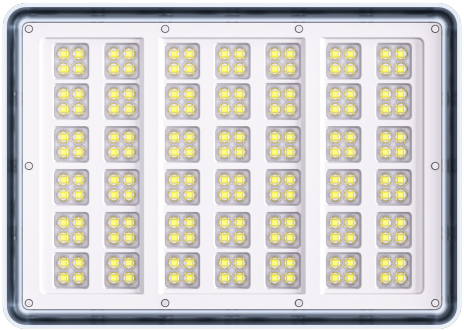


Drawing Alcione 200

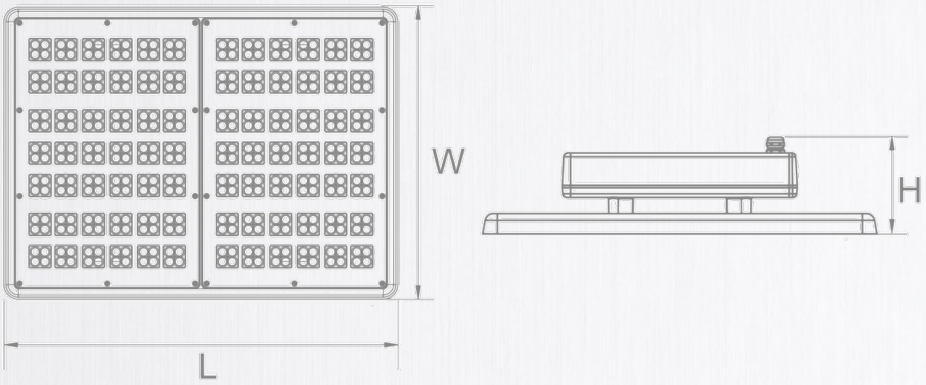

	L	W	H
60W	362mm	257mm	120mm
100W	362mm	257mm	120mm
120W	415mm	310mm	120mm
150W	487mm	362mm	120mm
200W	487mm	362mm	120mm
300W	720mm	365mm	130mm
360W	720mm	365mm	130mm

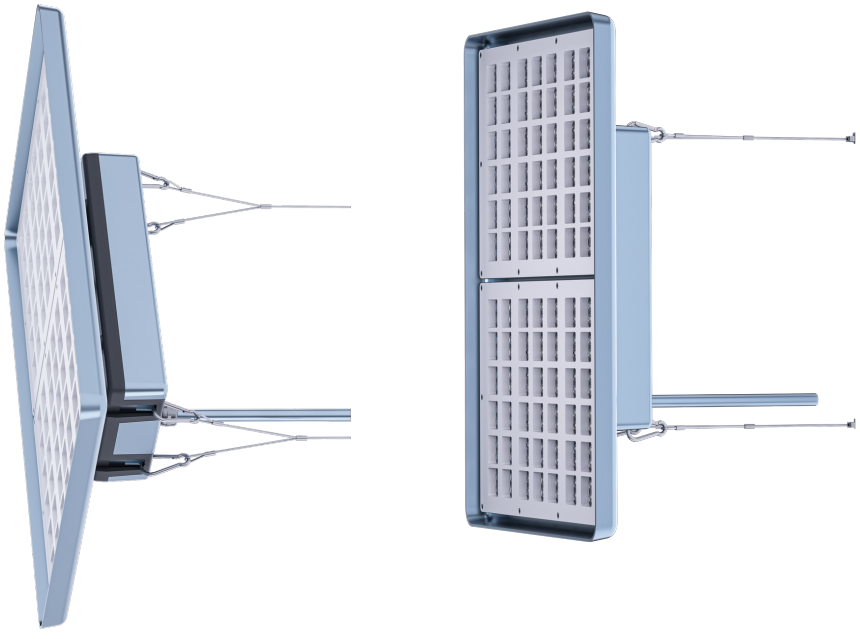



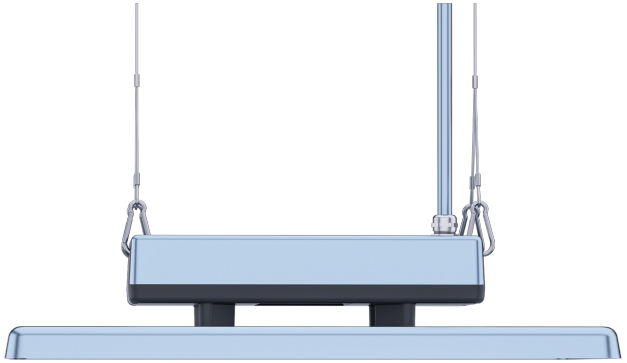

ALCIONE 200

GM-ALCI-200W-4KD110


Power: 200W
CCT: 4000K
Lumen: 32000
Optical option: 110° (for option: 80°/30*90°)
Dimmerable: 0-10V (optional: 1-10V, PWM, Triac dimming, DALI-2)
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 226 W/m*K
TM21: L70B10 >102000hr
Degree of protection: IP65
Impact protection: IK10
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Wall mounted
Suspended mounted
Description: Sensor for option
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode
Led: Philips


OUTDOOR

GMTECNOLED



Drawing Sirio lens ad60-cctad

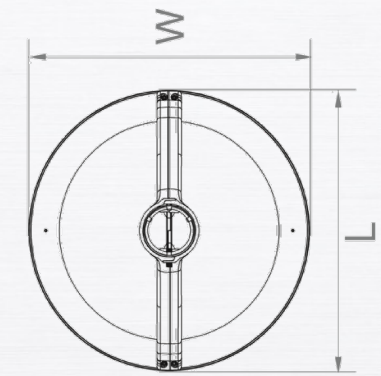

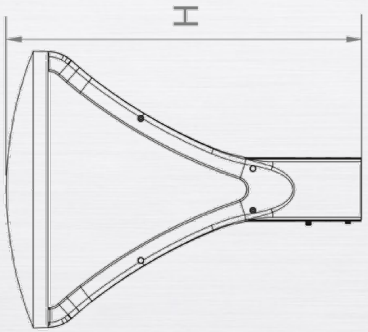

	L	W	H
30W-90W	422mm	422mm	539mm








SIRIO LENS
AD60-CCTAD

GM-SIRI-60W-LNS-TADD90-AD

Power: 60W/40W/30W
CCT: 2200K/3000K/4000K
Lumen: 9600
Optical option: 90°
Dimmerable: NO
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Description: With lens and remote controller for adjust power and CCT
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)

Drawing Sirio plate ad60-cctad

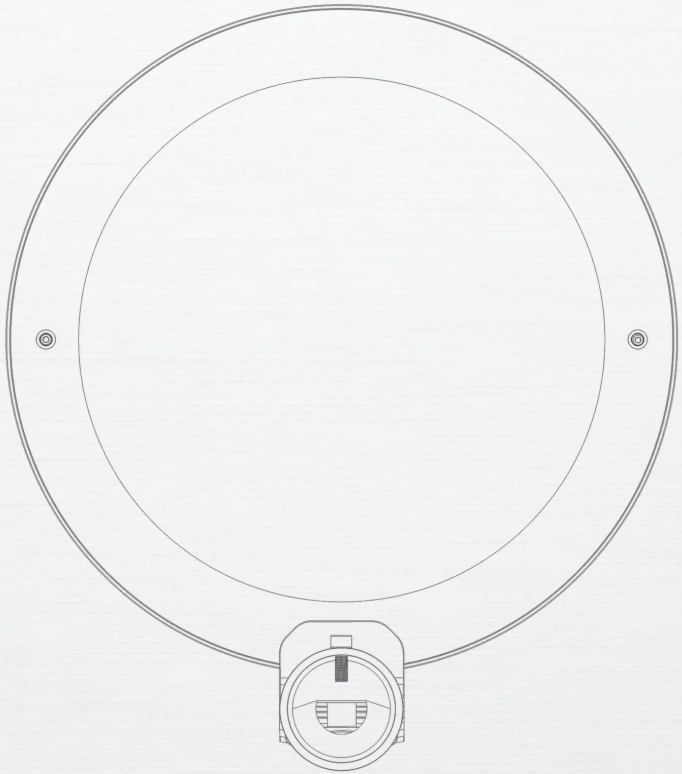





GMTECNOLED





SIRIO PLATE
AD60-CCTAD

GM-SIRI-60W-PLT-TADTP3-AD


Power: 60W/40W/30W
CCT: 2200K/3000K/4000K
Lumen: 9600
Optical option: Type3
Dimmerable: NO
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP66
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Description: With kerafyrm diffuser plate and remote controller for adjust power and CCT
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 6kV Common Mode (optional: 10kV/20kV Surge Protection Device)

Drawing SIRIO HERITAGE 40

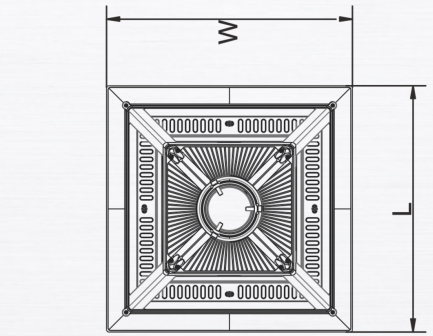

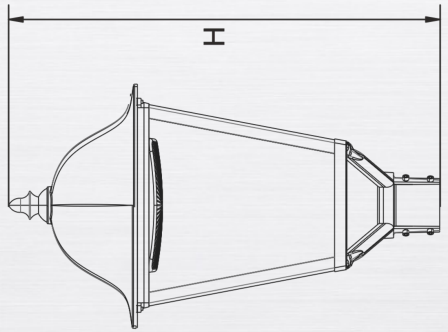

H	701mm
W	400mm
L	400mm
40W	

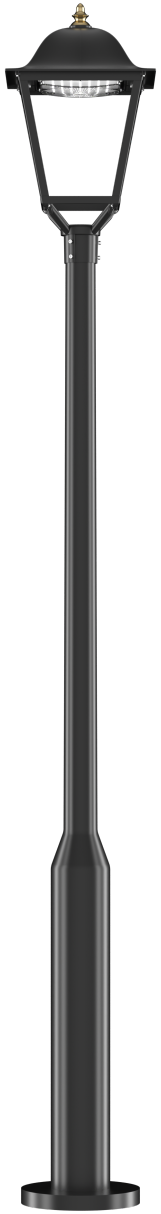

GMTECNOLED



SIRIO HERITAGE 40

GM-SIRI-40W-HRT-4KD120

Power: 40W
CCT: 4000K
Lumen: 5600
Optical option: 120°
Dimmerable: NO (optional: DALI-2 or 0/1-10V, PWM, Triac dimming)
CRI: >70
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 96 W/m*K
TM21: L70B10>108000hr
Degree of protection: IP65
Impact protection: IK08
Operating temperature: -40°C - +45°C
Photobiological Risk: RG0/1
Pole mounted
Driver: Sosen
Voltage - Frequency: 100-277V - 50/60Hz
Surge protection: 6kV Differential Mode, 10kV Common Mode (optional: 10kV/20kV Surge Protection Device)
LED: Cree

Drawing Wallwasher 72-rgbnw





GMTECNOLED





WALLWASHER 72-RGBNW

GM-WALL-RGBNWD15-72W

Power: 72W
Emitting Color: RGBNW
Optical option: 15° (optional: 30°/45°/60°/90°/120°)
Dimmerable: NO
CRI: >80
>50000hr
Degree of protection: IP65
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling/floor mounted
Voltage - Frequency: AC100-240V, DC24V
Led: Epistar/Philips/OSRAM

Drawing Wallwasher 72-rgbww





GMTECNOLED





WALLWASHER 72-RGBWW

GM-WALL-RGBWWD15-72W

Power: 72W
Emitting Color: RGBWW
Optical option: 15° (optional: 30°/45°/60°/90°/120°)
Dimmerable: NO
CRI: >80
>50000hr
Degree of protection: IP65
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling/floor mounted
Voltage - Frequency: AC100-240V, DC24V
Led: Epistar/Philips/OSRAM

Drawing Wallwasher 72-nw





GMTECNOLED



WALLWASHER 72-NW

GM-WALL-NWD15-72W

Power: 72W
Emitting Color: NW
Optical option: 15° (optional: 30°/45°/60°/90°/120°)
Dimmerable: NO
CRI: >80
>50000hr
Degree of protection: IP65
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling/floor mounted
Voltage - Frequency: AC100-240V, DC24V
Led: Epistar/Philips/OSRAM

Drawing Wallwasher 72-ww





GMTECNOLED



WALLWASHER 72-WW

GM-WALL-WWD15-72W


Power: 72W
Emitting Color: WW
Optical option: 15° (optional: 30°/45°/60°/90°/120°)
Dimmerable: NO
CRI: >80
>50000hr
Degree of protection: IP65
Operating temperature: -20°C - +40°C
Photobiological Risk: RG0/1
Wall mounted
Ceiling/floor mounted
Voltage - Frequency: AC100-240V, DC24V
Led: Epistar/Philips/OSRAM

OFFICE


GMTECNOLED





Drawing Merope black 40

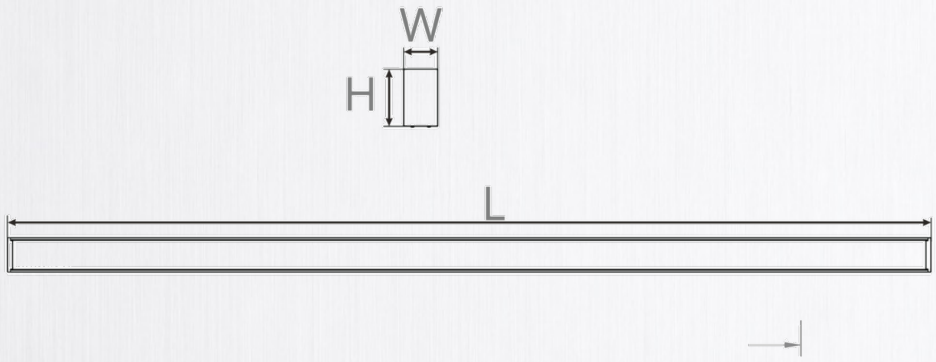

	L	W	H
24W-40W	1208mm	45mm	75mm

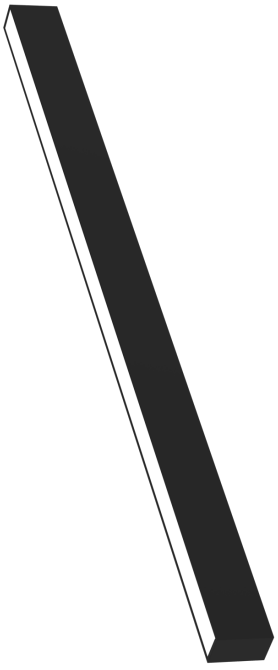

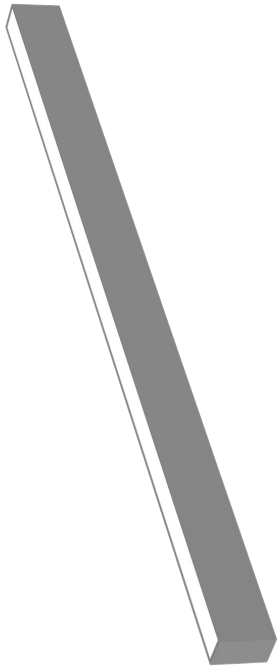

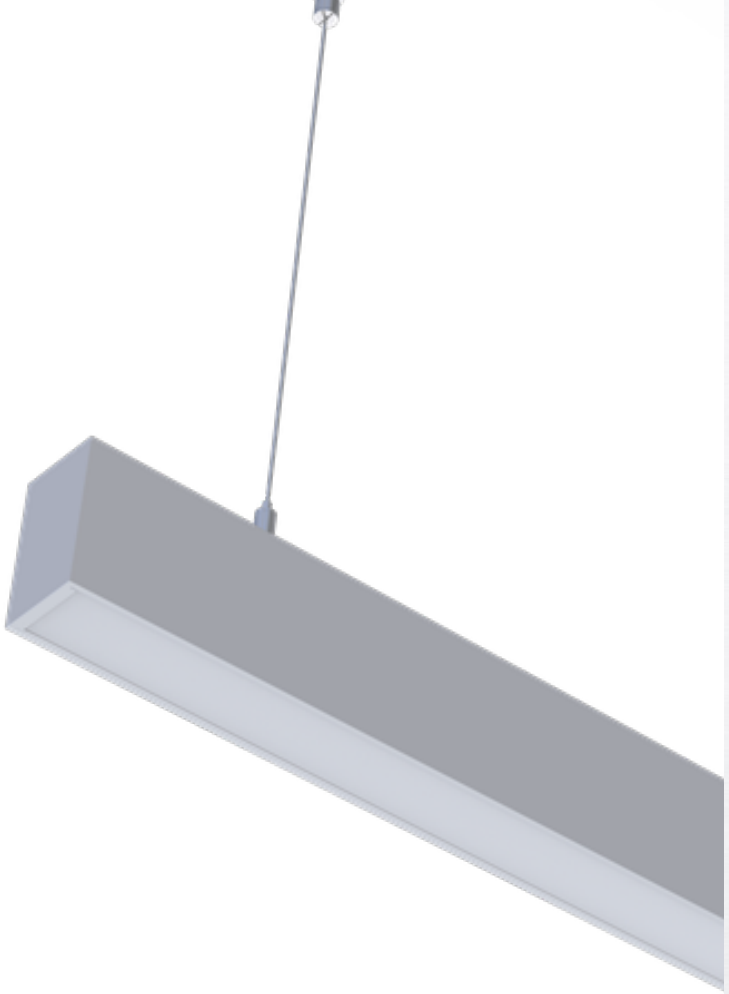


MEROPE BLACK 40

GM-MERO-BLC-34W-4KD120

Power: 40W/32W/24W
CCT: 4000K
Lumen: 120lm/W
Optical option: 120°
Dimmerable: NO
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 209 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK08
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Description: Black (optional: grey)
Driver: Eaglerise
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 2kV Differential Mode, 2kV Common Mode

Drawing Merope white 40

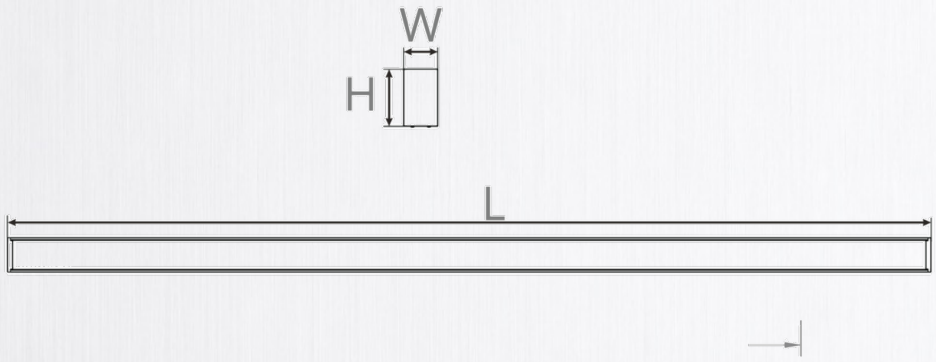

	L	W	H
24W-40W	1208mm	45mm	75mm





MEROPE WHITE 40


GM-MERO-WHT-34W-4KD120

Power: 40W/32W/24W
CCT: 4000K
Lumen: 120lm/W
Optical option: 120°
Dimmerable: NO
CRI: >80
SDCM: ≤5
Power factor: >0.95
Thermal conductivity: 209 W/m*K
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK08
Operating temperature: -20°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Description: White
Driver: Eaglerise
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 2kV Differential Mode, 2kV Common Mode

GMTECNOLED

GMTECNOLED

Drawing Antares sqr-34

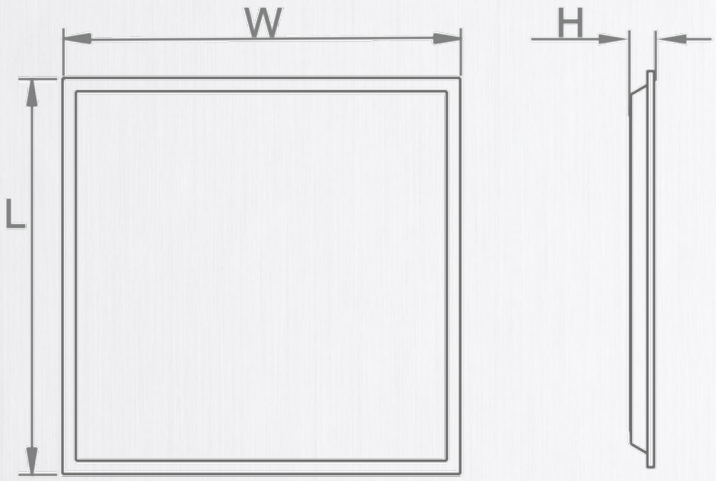


	L	W	H
SQR	595mm	595mm	32mm
RCT	295mm	1195mm	32mm







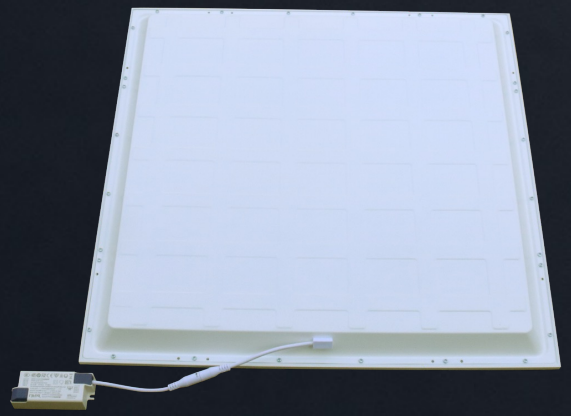


ANTARES SQR-34

GM-ANTA-SQR-34W-4KD90

Power: 34W
CCT: 4000K
Lumen: 4080
Optical option: 90°
Dimmerable: NO (optional: DALI+Push)
CRI: >80
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK02
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Ceiling mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode


GMTECNOLED

Drawing Antares rct-34

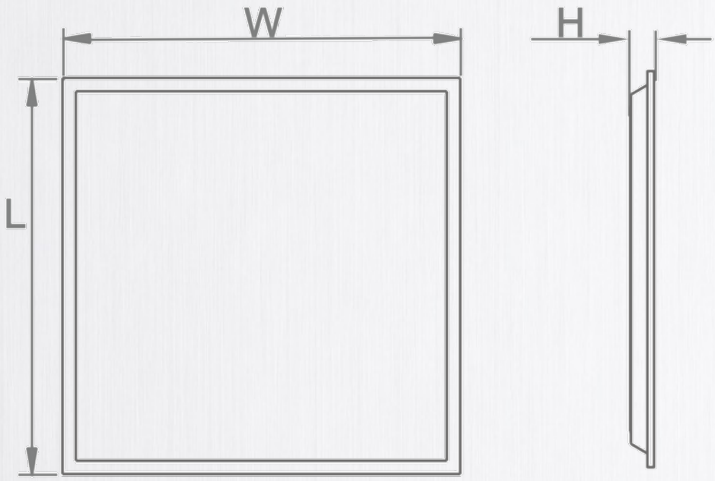

	L	W	H
SQR	595mm	595mm	32mm
RCT	295mm	1195mm	32mm



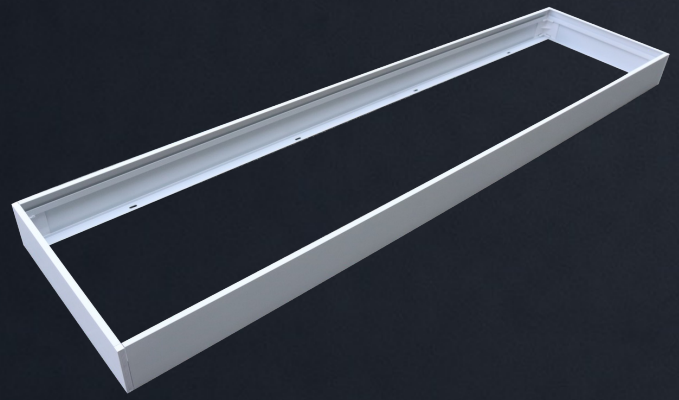




ANTARES RCT-34

GM-ANTA-RCT-34W-4KD90


Power: 34W
CCT: 4000K
Lumen: 4080
Optical option: 90°
Dimmerable: NO (optional: DALI+Push)
CRI: >80
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK02
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Ceiling mounted
Driver: Lifud
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode

GMTECNOLED


Drawing Antares sqr-ad42

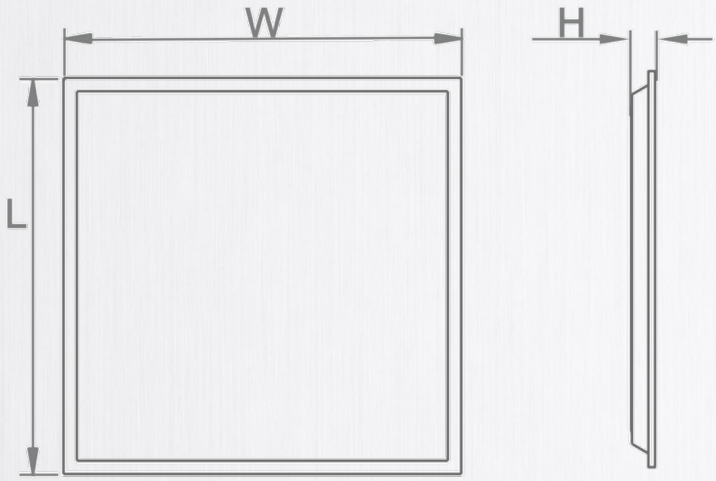

	L	W	H
SQR	595mm	595mm	32mm
RCT	295mm	1195mm	32mm

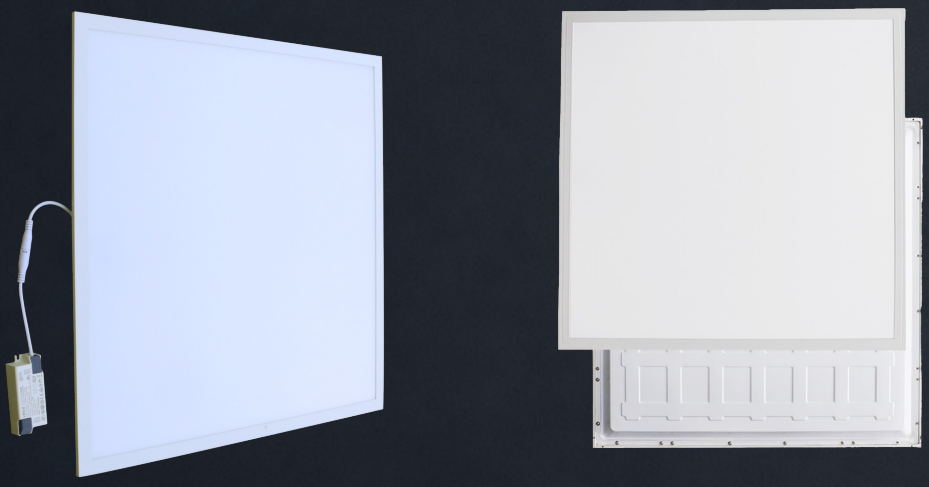



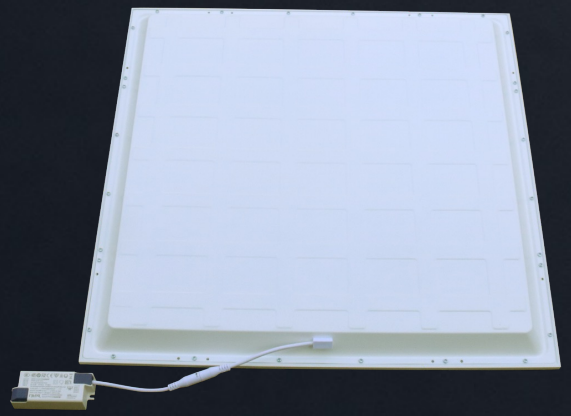


ANTARES
SQR-AD42

GM-ANTA-SQR-42W-4KD90-AD

Power: 13W-42W (DIP switch power adjustable)
CCT: 4000K
Lumen: 160lm/W
Optical option: 90°
Dimmerable: NO
CRI: >80
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK02
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Ceiling mounted
Driver: Eaglerise
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode


GMTECNOLED

Drawing Antares rct-ad42

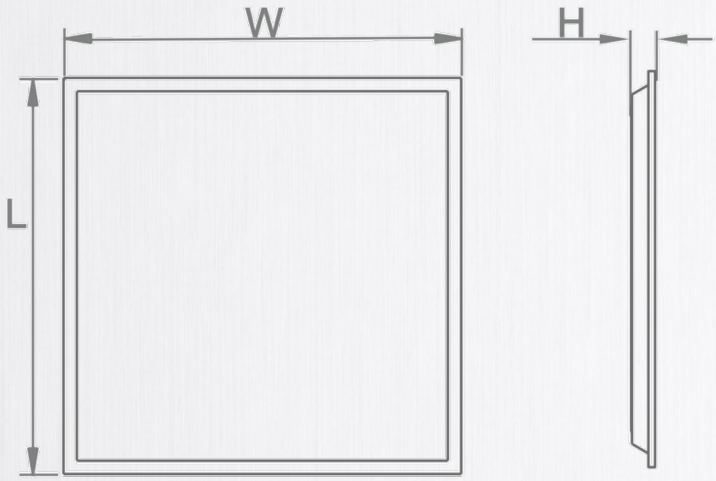

	L	W	H
SQR	595mm	595mm	32mm
RCT	295mm	1195mm	32mm



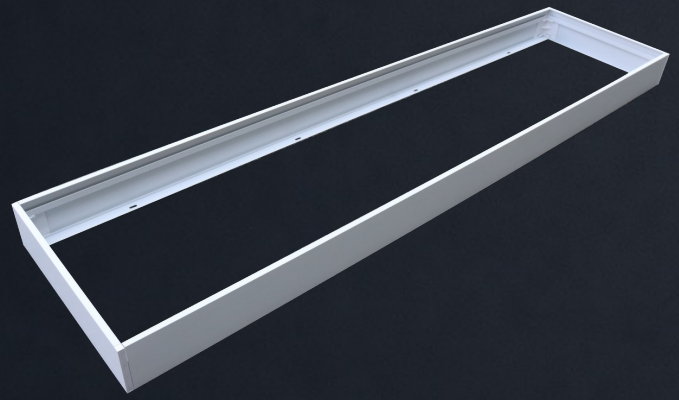



ANTARES
RCT-AD42

GM-ANTA-RCT-42W-4KD90-AD

Power: 13W-42W (DIP switch power adjustable)
CCT: 4000K
Lumen: 160lm/W
Optical option: 90°
Dimmerable: NO
CRI: >80
Power factor: >0.95
TM21: L70B10>102000hr
Degree of protection: IP20
Impact protection: IK02
Operating temperature: -30°C - +45°C
Photobiological Risk: RG0/1
UGR: <19
Suspended mounted
Ceiling mounted
Driver: Eaglerise
Voltage - Frequency: 220-240V - 50/60Hz
Surge protection: 1kV Differential Mode

GMTECNOLED

GMTECNOLED S.R.L.
Cremona, Italy
VAT Number / Tax
Code: 01796130191
REA Number: CR-202173

Operational Headquarters & Warehouse
Via degli Artigiani, 2
26030 Cicognolo (CR) – Italy

Contact Information
Email: info@gmtecnoled.com

Website
www.gmtecnoled.com

Laboratory Testing
ORCHIDEA MILANO

Lighting analysis laboratory specialized in photometry, optical performance testing, and photometric evaluation of lighting fixtures.

Website
www.orchidea-milano.com

GMTECNOLED