






Features

Wattage Switchable	75W/100W/150W Switchable	152W/200W/240W Switchable	200W/240W/300W Switchable
Luminous Efficacy	180LPW@75W 175LPW@100W 160LPW@150W	180LPW@152W 175LPW@200W 165LPW@240W	180LPW@200W 175LPW@240W 160LPW@300W
Lumens output	13500lm@75W 17500lm@100W 24000lm@150W	28000lm@152W 35000lm@200W 40000lm@240W	36000lm@200W 42000lm@240W 48000lm@300W
MF Equivalent	300W-600W	800W-1000W	1000W-1500W
Fixture Weight	3.6kg(8.0lb)	4.4kg(9.7lb)	kg(lb)
LEDs QTY	196	336	392
LEDs Brand	Lumileds SMD3030		
CCT	4000K, 5000K		
CRI	70+		
Beam Angle	TYPE3, TYPE4, TYPE 5		
Input Voltage	100-277Vac, 120-347Vac, 277-480Vac		
Surge Protection	6KA / 10KA		
Function	Photocell, Daylight Harvest, 1-10V Dimming, Motion Sensor Optional		
Power Factor	>0.95		
IP Rating	IP66 /Wet Location		
Working Temp.	-40° C ~ 50° C (-40° F~122° F)		
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)		
Finish	Dark Bronze		
Lifespan(>70)	>100,000 Hours		
Warranty	5 Years warranty		
Certification	ETL, cETL, DLC Premium		



Optical options:

• TYPE 3






160lm/w

5 YEARS WARRANTY

Meanwell Driver


Lumileds LED

• TYPE 4




Dimension:

• 75W-100W-150W

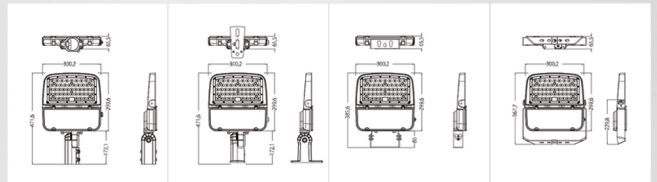

• 152W-200W-240W

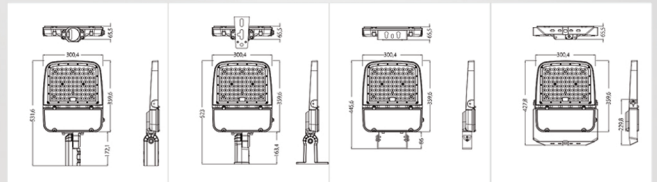

• TYPE 5

