




SIRIO

CE RoHS compliant LM 79 LM 80 TM 21



Features


Housing: Die-cast Aluminum
 Thermal Conductivity: 96 W/m·K
 Led: CREE JK 5050
 CRI: Ra>70 (80/90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Sosen
 Driver Efficiency: >93%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10KV
 Waterproof: IP65
 Impact Test: IK08
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~50°C
 Tm21: L90B10>50,000H
 Lifetime: 50,000H

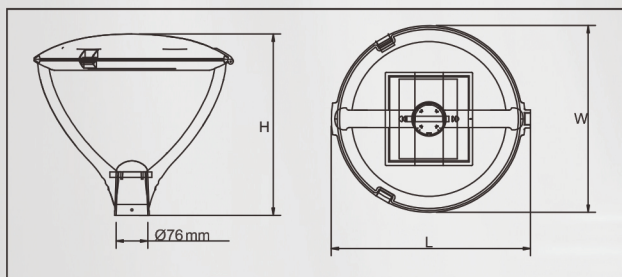

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
LN030CE1G-CS	30W	100~277V	4200LM	>70(80)	IP65	L550*W516*H550MM
LN040CE1G-CS	40W	100~277V	5600LM	>70(80)	IP65	L550*W516*H550MM
LN060CE1F-CS	60W	100~277V	7800LM	>70(80)	IP65	L550*W516*H550MM
LN090CE1F-CS	90W	100~277V	11700LM	>70(80)	IP65	L550*W516*H550MM

