



DUBHE

RoHS
compliant

LM 79

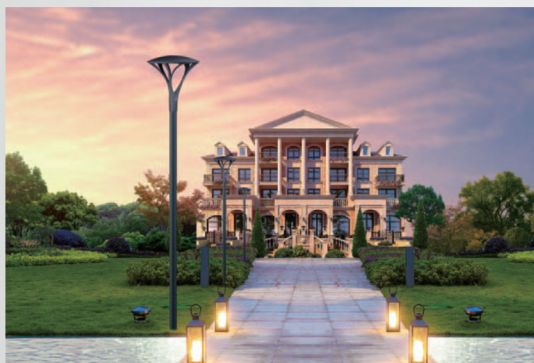
LM 80

TM 21






Features

Product Name:	KANI
Power:	30-100w
Supply voltage range:	90-305VAC
Temperature range:	-25°C / +55°C
Light guiding system:	PC lenses
Light source:	Luxeon 3030-2D Line
Luminous intensity class:	Symmetrical: G2
Glare index class:	D6
Colour temperature:	2700-6500K
Colour Rendering Index:	CRI>80
Luminous efficiency:	80 lm/w
LED Lifetime:	MIN 60000 hours at 25°C
Power Efficiency:	≥ 88%
Lightning protection:	10KV
Service life:	MIN 50000 hours
Housing material:	Die-cast aluminum
Sealing material:	Silicone rubber
Cover material:	Tempered glass
Wind resistance:	0.23 m²
Protection class:	IP 66
Shock protection:	IK 09
Corrosion resistance:	C5
Dimension (L x W x H):	600x600x610mm



80 lm/w

5 YEARS
WARRANTYOsram
DriverLuxeon
LED

Order code	power(W)	Temperature color	Luminous Flux of the luminaire(lm) -4000k(T=85°C)	CRI	Input voltage	IK	IP
2101	30	2700-6500k	≥2400	>80	100-305Vac	IK09	IP66
2102	50	2700-6500k	≥4000	>80	100-305Vac	IK09	IP66
2103	70	2700-6500k	≥5600	>80	100-305Vac	IK09	IP66
2104	90	2700-6500k	≥7200	>80	100-305Vac	IK09	IP66
2105	100	2700-6500k	≥8000	>80	100-305Vac	IK09	IP66