




ANTARES



Features


- Housing: Aluminum & Iron
- Thermal Conductivity: 226 W/m·K
- Led: Sanan
- CRI: Ra>80
- SDCM: <6
- Power Factor: >0.95
- THD: <15
- Driver: Philips
- Driver Efficiency: >92%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 2KV
- Waterproof: IP44
- Impact Test: IK08
- Electrical: 220-240V, 50/60Hz
- Operating Temperature: -20~40°C
- TM21: L80B10>50,000H
- Lifetime: 50,000H

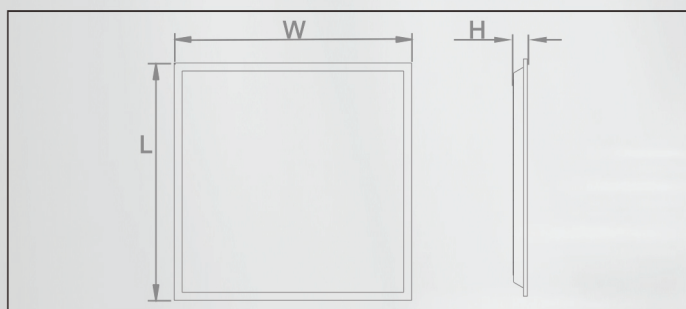

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave

Optical options:



120lm/w

3 YEARS WARRANTY

Philips Driver

Sanan LED

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
PH034TE22E-SP	34W	220~240V	4080LM	>80	IP44	L595*L595*H32MM
PH034TE14E-SP	34W	220~240V	4080LM	>80	IP44	L1195*W295*H32MM
PH034TE62E-SP	34W	220~240V	4080LM	>80	IP44	L620*W620*H32MM