



POWER 24V-IP67

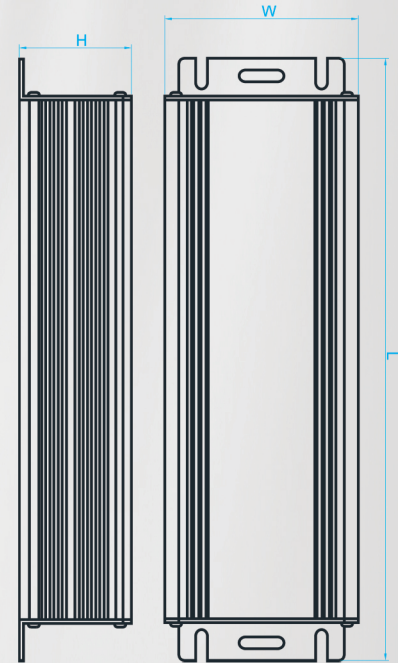

Operating Temperature/humidity	-30-45°C, 5-95%RH
Storage Temperature/humidity	-40-70°C, 5-95%RH
Temperature coefficient	±0.03%/°C(0-50°C)
Vibration	5-55Hz/2g, 30 Minutes
Safety	EN60598
Pressure	I/P-O/P:3KVAC IP-FG:1.88KVAC O/P-FG:0.5KVAC
Insulation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25°C/70%RH
EMC Emission	EN55022, EN55015 Class B
EMC Immunity	EN61547, ENV5024, EN61000-4-2/3/4/6/8/11

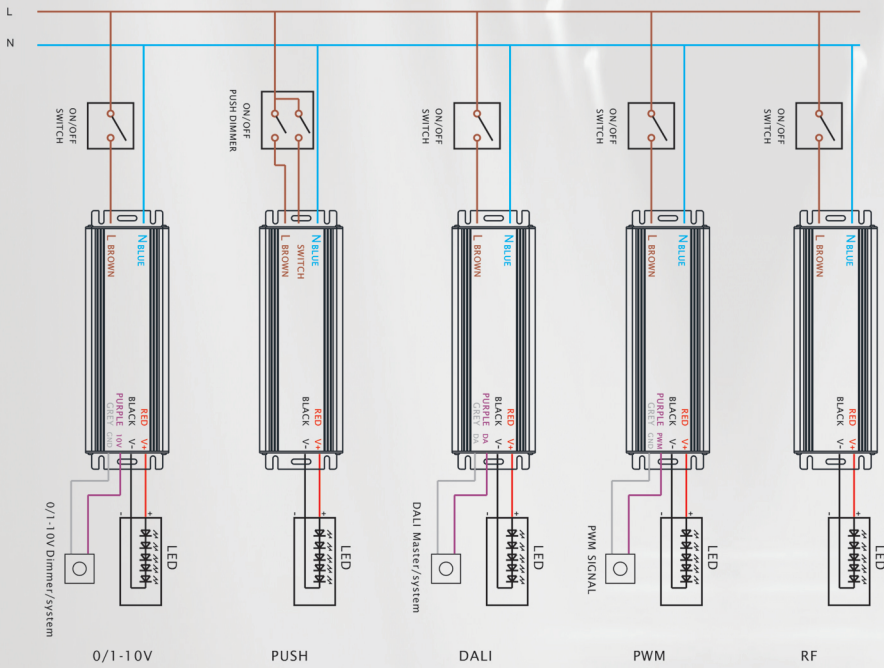

0-10V/PWM/RF/PUSH/DALI Dimmable/No Dimmable

Model	Input voltage	Output voltage	Output current	Size
DR-CV-150	100-240V/AC	12V	12.5mA	L250*W72*H42MM
		24V	6.25A	
DR-CV-180	100-240V/AC	12V	15A	L250*W72*H42MM
		24V	7.5A	
DR-CV-240	100-240V/AC	12V	18A	L250*W72*H42MM
		24V	10A	
DR-CV-300	100-240V/AC	12V	20A	L250*W72*H42MM
		24V	12.5A	