




Features


- Housing: Pure Aluminum A6063
- Thermal Conductivity: 226 W/m·K
- Led: CREE JK3030&5050
- CRI: Ra>70 (80/90 for option)
- SDCM: <6
- Power Factor: >0.95
- THD: <15
- Driver: Inventronic
- Driver Efficiency: >90%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 10KV
- Waterproof: IP66
- Impact Test: IK08
- Electrical: 100-277V, 50/60Hz
- Operating Temperature: -40~50°C
- TM21: L90B10>50,000H
- Lifetime: 50,000H

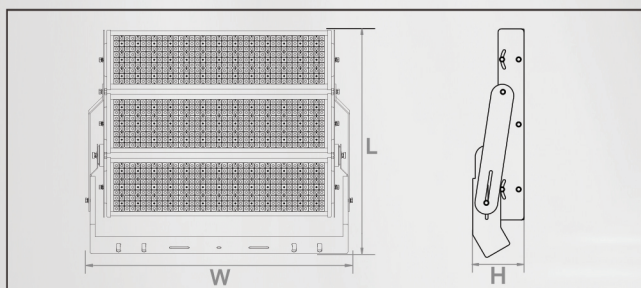

Functions

ZigBee · PWM · DALI · 0/1~10V · DMX

Optical options:

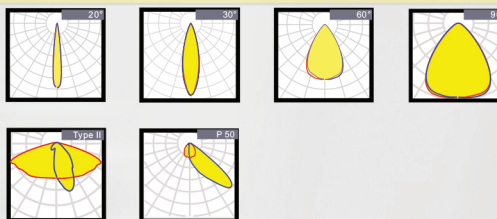

Model	Module	Watt	Voltage	Lumen	CRI	IP	Dimension
HM500PE1I-CI	500W Module x1	500W	100~277V	8000LM	>70	IP66	721*315*158
HM600PE1I-CI	600W Module x1	600W	100~277V	9600LM	>70	IP66	721*315*158
HM1K0PE2I-CI	500W Module x2	1000W	220~240V	16000LM	>70	IP66	810*502*158
HM1K2PE2I-CI	600W Module x2	1200W	220~240V	19200LM	>70	IP66	810*502*158
HM1K5PE3I-CI	500W Module x3	1500W	100~277V	24000LM	>70	IP66	810*704*158
HM1K8PE3I-CI	600W Module x3	1800W	100~277V	28800LM	>70	IP66	810*704*158

