




CE RoHS compliant LM79 LM80 TM21



## Features


Housing: Pure Aluminum A6063  
 Thermal Conductivity: 226 W/m·K  
 Led: CREE 3535&5050  
 CRI: Ra>70 ( 80/90 for option)  
 SDCM: <6  
 Power Factor: >0.95  
 THD: <15  
 Driver: Sosen  
 Driver Efficiency: >93%  
 Protection: OTP, OCP, OVP, SCP  
 Surge Protection: 10KV  
 Waterproof: IP65  
 Impact Test: IK08  
 Electrical: 220-240V, 50/60Hz  
 Operating Temperature: -40~50°C  
 TM21: L90B10>50,000H  
 Lifetime: 50,000H

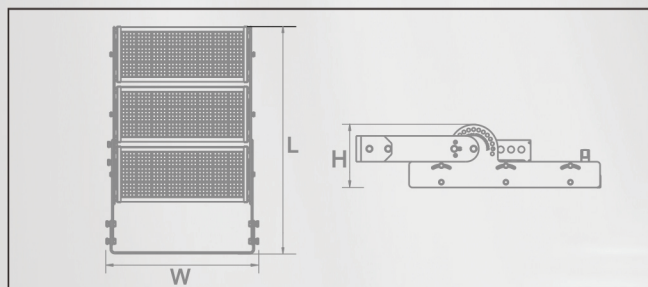

## Functions

ZigBee · PWM · DALI · 0/1~10V · DMX

## Optical options:

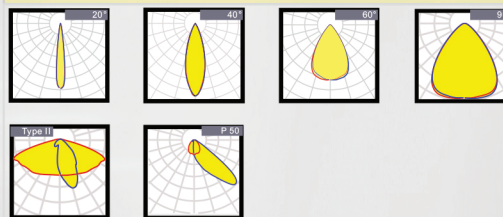

150lm/w 5 YEARS WARRANTY Sosen Driver CREE LED

Model	Module	Watt	Voltage	Lumen	CRI	IP	Dimension
HM250HE2H-CS	125W Module x2	250W	220~240V	37500LM	>70	IP65	L332*W350*H160
HM500HE4H-CS	125W Module x4	500W	220~240V	75000LM	>70	IP65	L628*W350*H160
HM750HE3H-CS	250W Module x3	750W	220~240V	112500LM	>70	IP65	L484*W587*H195
HM1K0HE4H-CS	250W Module x4	1000W	220~240V	150000LM	>70	IP65	L632*W587*H195
HM1K2HE5H-CS	250W Module x5	1200W	220~240V	187000LM	>70	IP65	L780*W587*H195
HM1K5HE6H-CS	250W Module x6	1500W	220~240V	225000LM	>70	IP65	L928*W587*H195

