




CASSIOPEA



Features


Housing: Pure Aluminum A6063
 Thermal Conductivity: 226 W/m·K
 Led: CREE JK5050
 CRI: Ra>70 (80/90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Inventronic
 Driver Efficiency: >90%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10KV
 Waterproof: IP66
 Impact Test: IK08
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~50°C
 TM21: L90B10>50,000H
 Lifetime: 50,000H

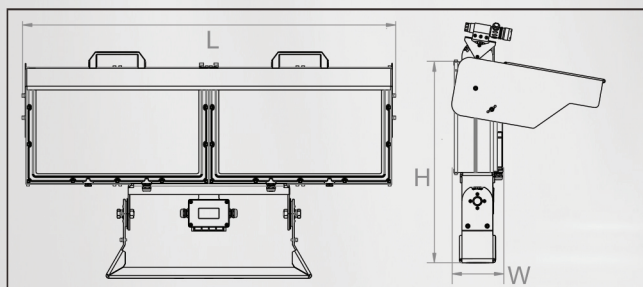

Functions

ZigBee · PWM · DALI · 0/1~10V · DMX

Optical options:

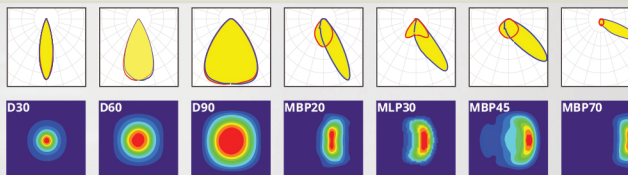

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HM500SE1G-CI	500W	100~277V	70000LM	>70	IP66	454*487*126.5
HM600SE1G-CI	600W	100~277V	84000LM	>70	IP66	454*487*126.5
HM1K0SE2G-CI	1000W	220~240V	140000LM	>70	IP66	904*523*126.5
HM1K2SE2G-CI	1200W	220~240V	168000LM	>70	IP66	904*523*126.5

